

COUNTY OF CHARLESTON




CTC 2018 RESURFACING PLAN April 19,2018

TABLE OF CONTENTS

<u>DESCRIPTION</u>	<u>SHEET NO.</u>
COVER SHEET.....	1
TABLE OF CONTENTS.....	2
PLAN MAP.....	3
PLAN SHEET.....	4
ROAD LIST BY LOCATION	5-6
WORK ITEM SUMMARY.....	7
MANHOLE LIST.....	8-9
STRIP MAPS.....	1 - 16

MAP OF 2018 CTC RESURFACING PLAN

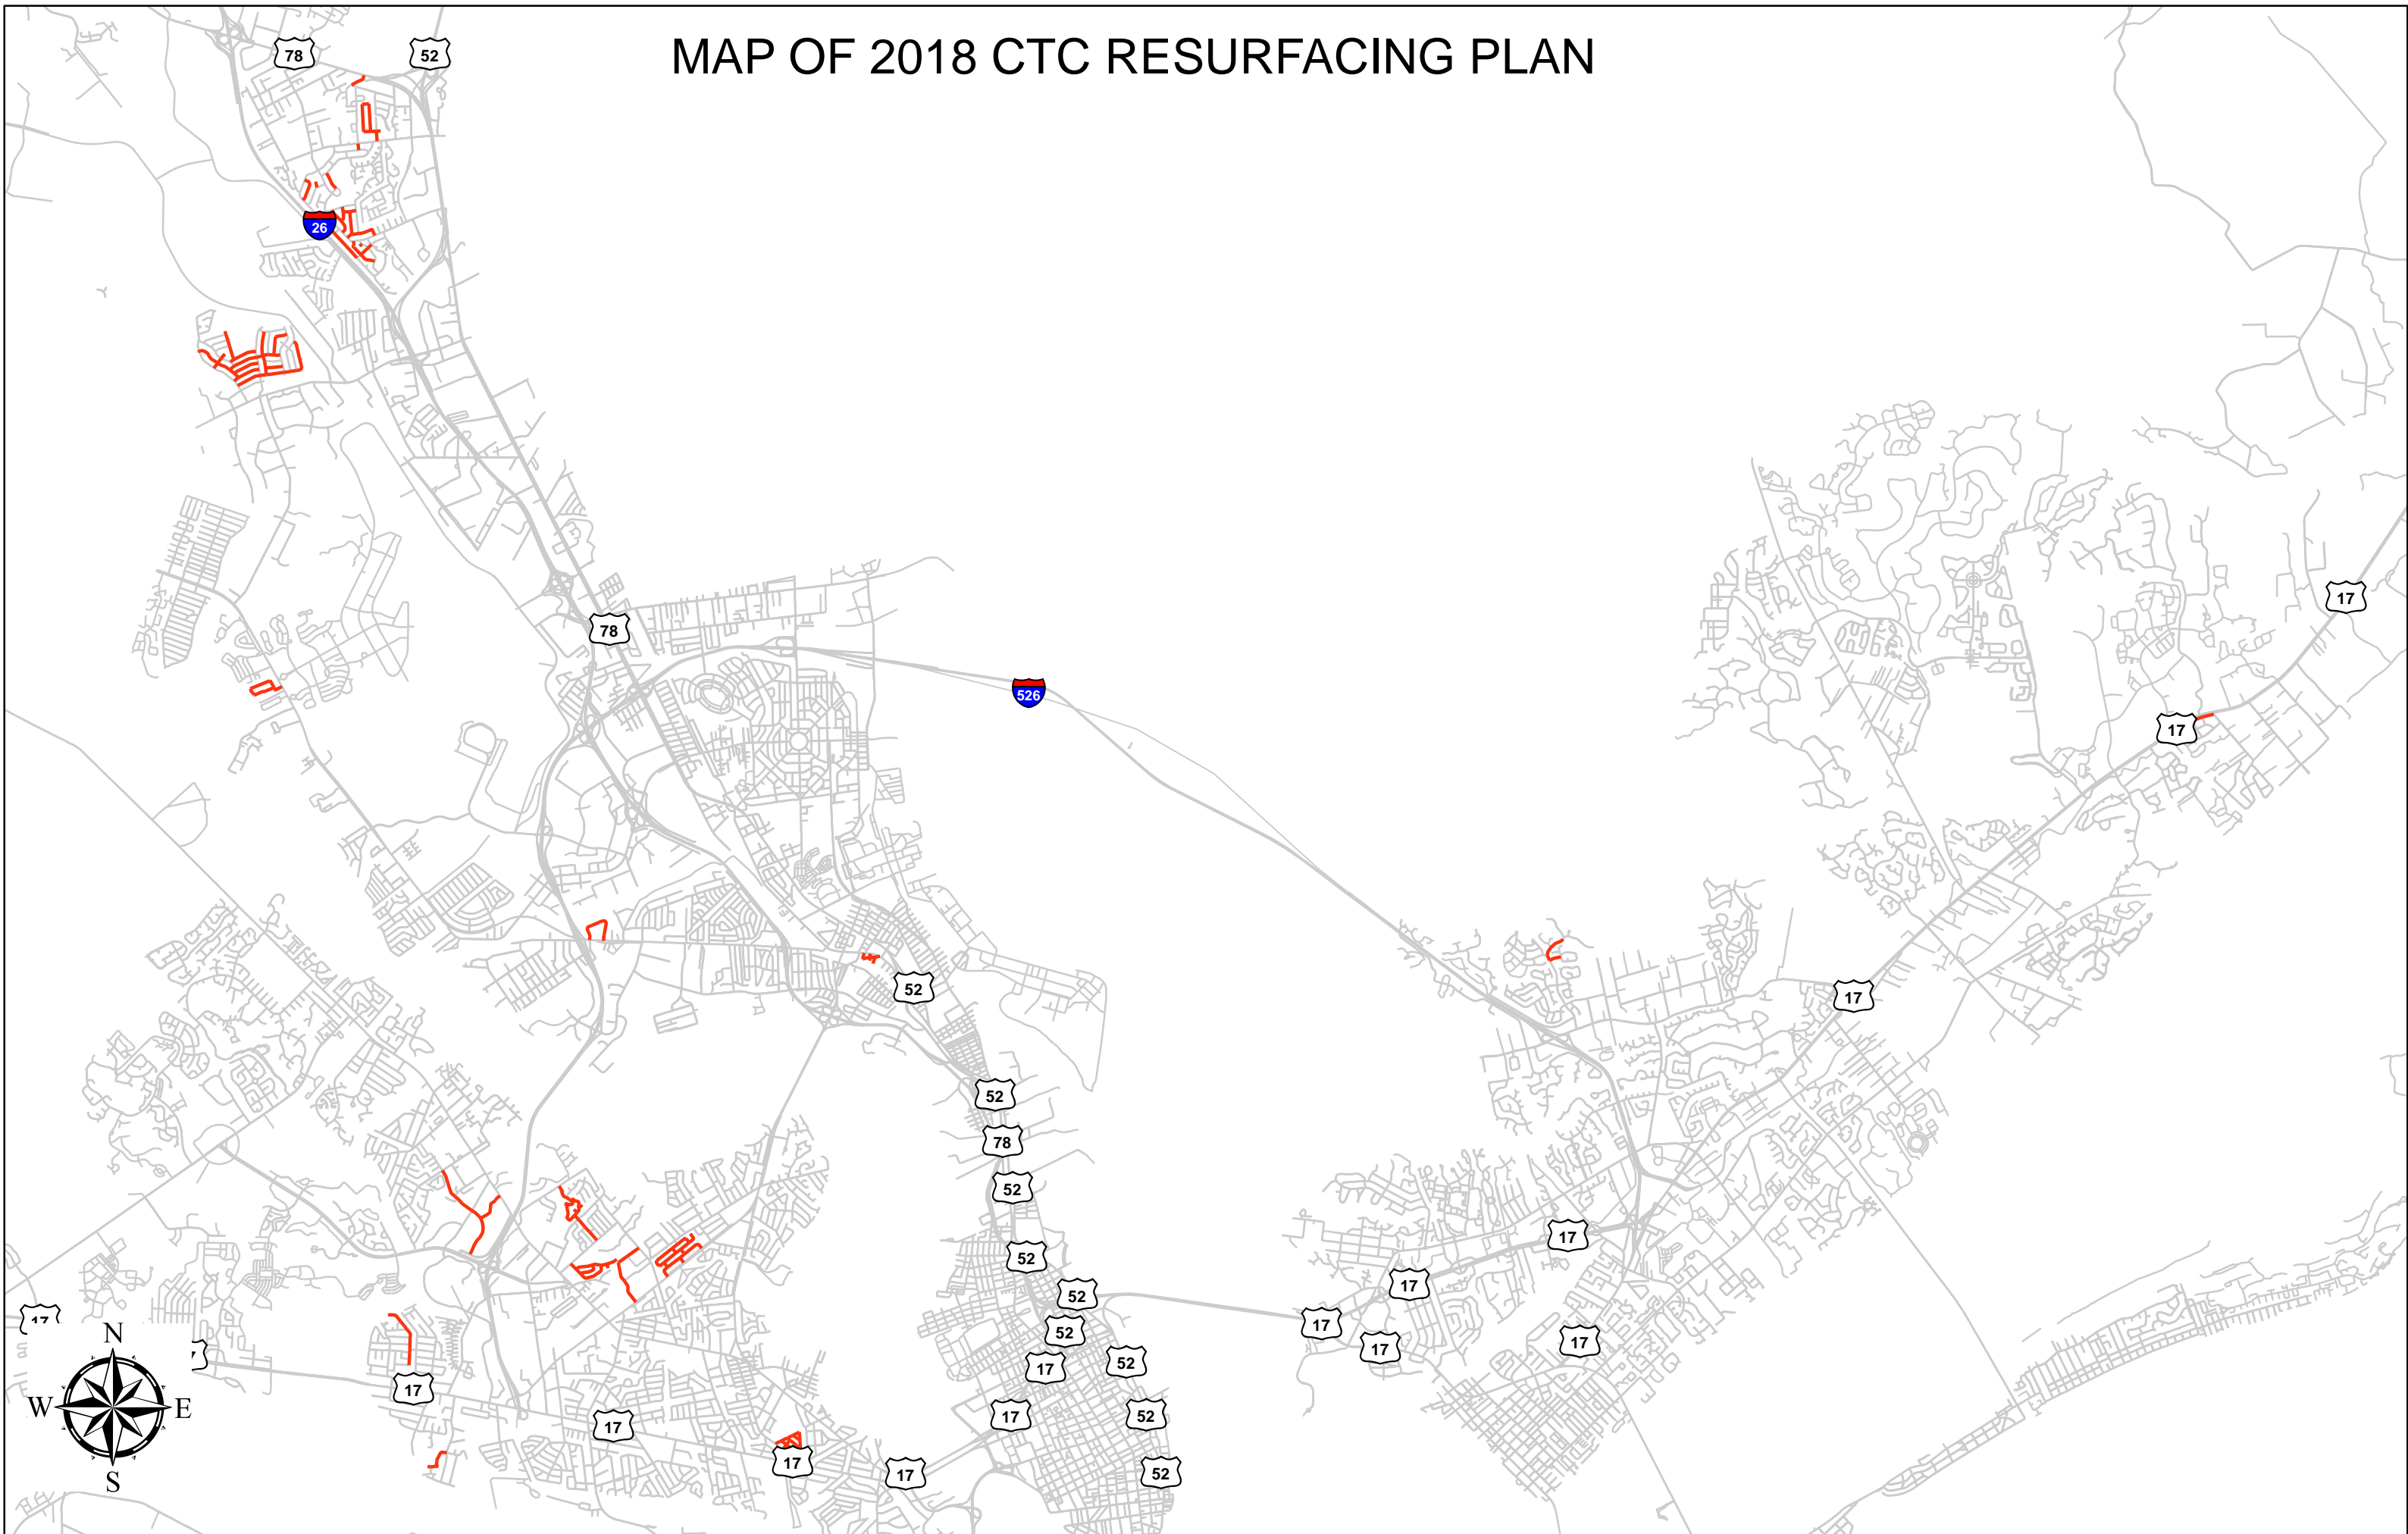

CTC 2018 Resurfacing Plan

Road List By Area

Map# Street Name State Route Number

Mount Pleasant

15	BELLE HALL PKWY	
16	MARGINAL RD	2276
15	PALMETTO BATTERY WAY	

North Charleston

14	AUBURN DR	
11	BROADMOORE PL	
14	BUCKNELL DR	
12	CEDARWOOD RD	
13	CHATSWORTH CT	
12	COURT WOOD RD	
12	DEAR BORNE RD	
11	DUBLIN RD	
10	E CONSTELLATION DR	1105
14	EMMIE ST	
14	GABLE ST	1439
11	GLENHAVEN SHORES	
11	HILLANDALE RD	
11	HILLVIEW LN	
9	KEEVER ST	
11	KINGS GRANT LN	
12	LEATH CT	
11	LONDONDERRY RD	
12	LONG SHADOW LN	
12	MELVILLE RD	
10	N CONSTELLATION DR	1105
11	NORTHHAVEN DR	
12	OLD HAZLEWOOD RD	
14	OMAHA ST	
8	OSCAR JOHNSON DR	
11	POINDEXTER RD	
12	POPLAR RIDGE RD	
9	ROOSEVELT ST	
9	RUMSEY ST	
14	RUTGERS RD	
10	S CONSTELLATION DR	1105
11	STONEHAVEN DR	
11	STONYBROOK RD	
9	TRUMAN AV	
14	TULANE RD	
10	W CONSTELLATION DR	1105
12	WAINWRIGHT RD	
13	WITSELL ST	
13	YORKSHIRE LN	

Map# Street Name

State Route Number

West Ashley

4	ASHLEY CROSSING DR	
4	ASHLEY CROSSING LN	
2	AUDUBON AV	
2	BATTLEWOOD AV	
7	BIRTHRIGHT ST	
5	CATTAIL ROW	
6	CHELSEA CT	
7	CLYDE ST	
2	COLLINGWOOD AV	
7	DERBY ST	
7	DOWNING ST	
3	EAST ESTATES BLVD	
7	FALMOUTH ST	
6	GREENMORE DR	
7	HASTING ST	
2	HICKORY ST	
6	IVY HALL RD	
2	LIVE OAK AV	
5	MADAGASCAR CT	
6	N WOODMERE DR	
7	OXFORD ST	
5	PADDY PL	
1	PARKSTONE DR	
5	RICE HOLLOW CT	
7	SALISBURY ST	
5	SANDCROFT DR	
7	SHEFFIELD ST	
6	STONEHEDGE RD	
2	TALL OAK AV	
2	TANGLEWOOD AV	
5	W SANDCROFT DR	

Quantity Sheet

<u>SCDOT Spec</u>	<u>Description</u>	<u>Quantity</u>	<u>Unit</u>
1071000	TRAFFIC CONTROL	1	LS
2023000	REMOVAL & DISPOSAL OF EXISTING PAVEMENT (CONCRETE DRIVEWAY AS DIRECTED) *	850	SY
2024100	REMOVAL & DISPOSAL OF EXISTING CONCRETE GUTTER *	1770	LF
2027000	REMOVAL & DISPOSAL OF EXISTING CONCRETE SIDEWALK *	1020	SY
2033000	BORROW EXCAVATION (FOR SHOULDERS) *	500	CY
3050199	GRADED AGGREGATE BASE COURSE	20	TONS
3069900	MAINTENANCE STONE*	20	TONS
4011004	LIQUID ASPHALT BINDER PG 64-22	1282	TONS
4012040	"FULL DEPTH ASPH. PAV. PATCHING 4"" UNIFORM"	9930	SY
4012040D	FULL DEPTH ASPH. PAV. PATCHING FOR DRIVES 4" UNIFORM	380	SY
4013150	MILLING EXISTING ASPHALT PAVEMENT 1.5"	169121	SY
4013155	VARIABLE EDGE MILLING 1.5"	1651	SY
4013200	"MILLING EXISTING ASPHALT PAVEMENT 2""	8820	SY
4013990	"VARIABLE MILLING EXISTING ASPHALT PAVEMENT 0" TO 1"	14000	SY
4113320	WARM MIX ASPHALT SURFACE COURSE TYPE B	680	TON
4113340	WARM MIX ASPHALT SURFACE COURSE TYPE C	19929	TON
4113340D	WARM MIX ASPHALT SURFACE COURSE TYPE C FOR DRIVES & INTERSECTIONS	913	TON
6241010	4" WHITE SOLID LINES (PVT. EDGE LINES) PERM.PVMT.MARKING	115	LF
6241015	8" WHITE SOLID LINES PERM.PVMT.MARKINGS	197	LF
6241023A	48IN X 48 IN WHITE YIELD TRIANGLE – PERM.PVMT.MARKING	64	EA
6241025	24" WHITE SOLID LINES (STOP/DIAG LINES)-PERM.PVMT.MARKING	1832	LF
6241030	WHITE SINGLE ARROWS (LT, STRGHT, RT) PERM.PVMT.MARKING	4	EA
6241074	4" YELLOW SOLID LINES(PVT.EDGE LINES) PERM.PVMT.MARKING	27915	LF
6241080	24" YELLOW SOLID LINES - PERM.PVMT.MARKING	48	LF
6250010	"4"" WHITE SOLID LINES (PVT. EDGE LINES) - FAST DRY PAINT"	115	LF
6250015	"8"" WHITE SOLID LINES (CROSSWALK & CHANNELIZATION) FAST DRY PAINT *"	197	LF
6250025	"24"" WHITE SOLID LINES (STOP/DIAGONAL LINES) - FAST DRY PAINT"	1832	LF
6250030	"WHITE SINGLE ARROW (LEFT, STRAIGHT, RIGHT) - FAST DRY	4	EA
6250110	"4"" YELLOW SOLID LINE (PVT. EDGE & NO PASSING) - FAST DRY PAINT"	27915	LF
6250115	24" YELLOW SOLID DIAGONAL LINES - FAST DRY PAINT	48	LF
6251023	48IN X 48 IN WHITE YIELD TRIANGLE FAST DRY	64	EA
6301100	"PERMANENT YELLOW PAVEMENT MARKER BI- DIR. - 4""x4""	48	EA
675XXX	TRAFFIC LIGHT TIMING LOOPS- MOTORCYCLE SENSITIVE (COMPLETE)	2	EA
7141112	15" RC PIPE CULVERT - CLASS III (IN PLACE)*	24	LF
7197110	ADJUST CATCH BASIN (REPAIR C.B. TYPE 1)	3	EA
7197130	ADJUST DROP INLET	15	EA
7203120	CONCRETE CURB AND GUTTER(1'-6") - SLOPING FACE	1500	LF
7203210	CONCRETE CURB AND GUTTER 2'0"	100	LF
7204100	CONCRETE SIDEWALK (4-IN UNIFORM)*	390	SY
7204900	DETECTABLE WARNING SURFACE (Cast in place where applicable)	510	SF
7205000	"CONCRETE DRIVEWAY (6"" UNIFORM)"	775	SY
7209000	PEDESTRIAN RAMP CONTRUCTION	630	SY
8100001	PERMANENT VEGETATION	10	MSY
8152004	INLET STRUCTURE FILTER - TYPE F (WEIGHTED)*	50	LF
8152007	SEDIMENT TUBE*	50	LF
8153000	SILT FENCE*	200	LF

* THESE QUANTITIES ARE NOT SHOWN IN DETAIL BUT ARE INCLUDED TO BE USED AS DIRECTED BY THE ENGINEER

Manhole Report

Map Num	Route	Manhole	Lower	Raise	Valve	Lower	Raise
4	ASHLEY CROSSING DR	3		1			
4	ASHLEY CROSSING LN	3	1		2		
14	AUBURN DR	1					
7	BIRTHRIGHT ST	2		2			
14	BUCKNELL DR				1		1
12	CEDARWOOD RD	1					
12	COURT WOOD RD				1		
7	DERBY ST	2		2			
7	DOWNING ST				1		1
11	DUBLIN RD	3					
10	E CONSTELLATION DR	1		1			
14	GABLE ST	1		1			
6	GREENMORE DR	1					
2	HICKORY ST	1		1	1		1
11	HILLANDALE RD	1					
11	HILLVIEW LN	1					
6	IVY HALL RD	2		1	1	1	
9	KEEVER ST	1		1	1		1
11	KINGS GRANT LN	2		1			
2	LIVE OAK AV	1		1	1		1
12	LONG SHADOW LN	6	3				
16	MARGINAL RD	1		1	1		1
10	N CONSTELLATION DR	1		1			
6	N WOODMERE DR	1					
11	NORTHHAVEN DR	1					
8	OSCAR JOHNSON DR	1		1			
1	PARKSTONE DR	2	1				
11	POINDEXTER RD	1					

1. Figures are representative estimates alerting to potential issues, exact quantities to be confirmed in field by contractor.

2. The Contractor must coordinate with the Utility Company to determine the best practice for correcting conditions in the field. The Charleston County Utility Coordinator will assist the Contractor with the coordination.

3. Roadway Milling was taken into consideration when this table was developed. However, this is an estimate and the Contractor must complete their own assessment of the manholes and valves to determine the amount of adjustment necessary to ensure a smooth ride.




Map Num	Route	Manhole	Lower	Raise	Valve	Lower	Raise
9	RUMSEY ST	1		1	1		1
14	RUTGERS RD	1					
10	S CONSTELLATION DR	6		6			
5	SANDCROFT DR	1		1	1		
7	SHEFFIELD ST				1		1
11	STONEHAVEN DR	1					
6	STONEHEDGE RD	1					
2	TALL OAK AV	2					
9	TRUMAN AV	3		3	1		1
10	W CONSTELLATION DR	1		1			
12	WAINWRIGHT RD	1		1			
13	WITSELL ST	1			1		

1. Figures are representative estimates alerting to potential issues, exact quantities to be confirmed in field by contractor.

2. The Contractor must coordinate with the Utility Company to determine the best practice for correcting conditions in the field. The Charleston County Utility Coordinator will assist the Contractor with the coordination.




3. Roadway Milling was taken into consideration when this table was developed. However, this is an estimate and the Contractor must complete their own assessment of the manholes and valves to determine the amount of adjustment necessary to ensure a smooth ride.

MAP 1


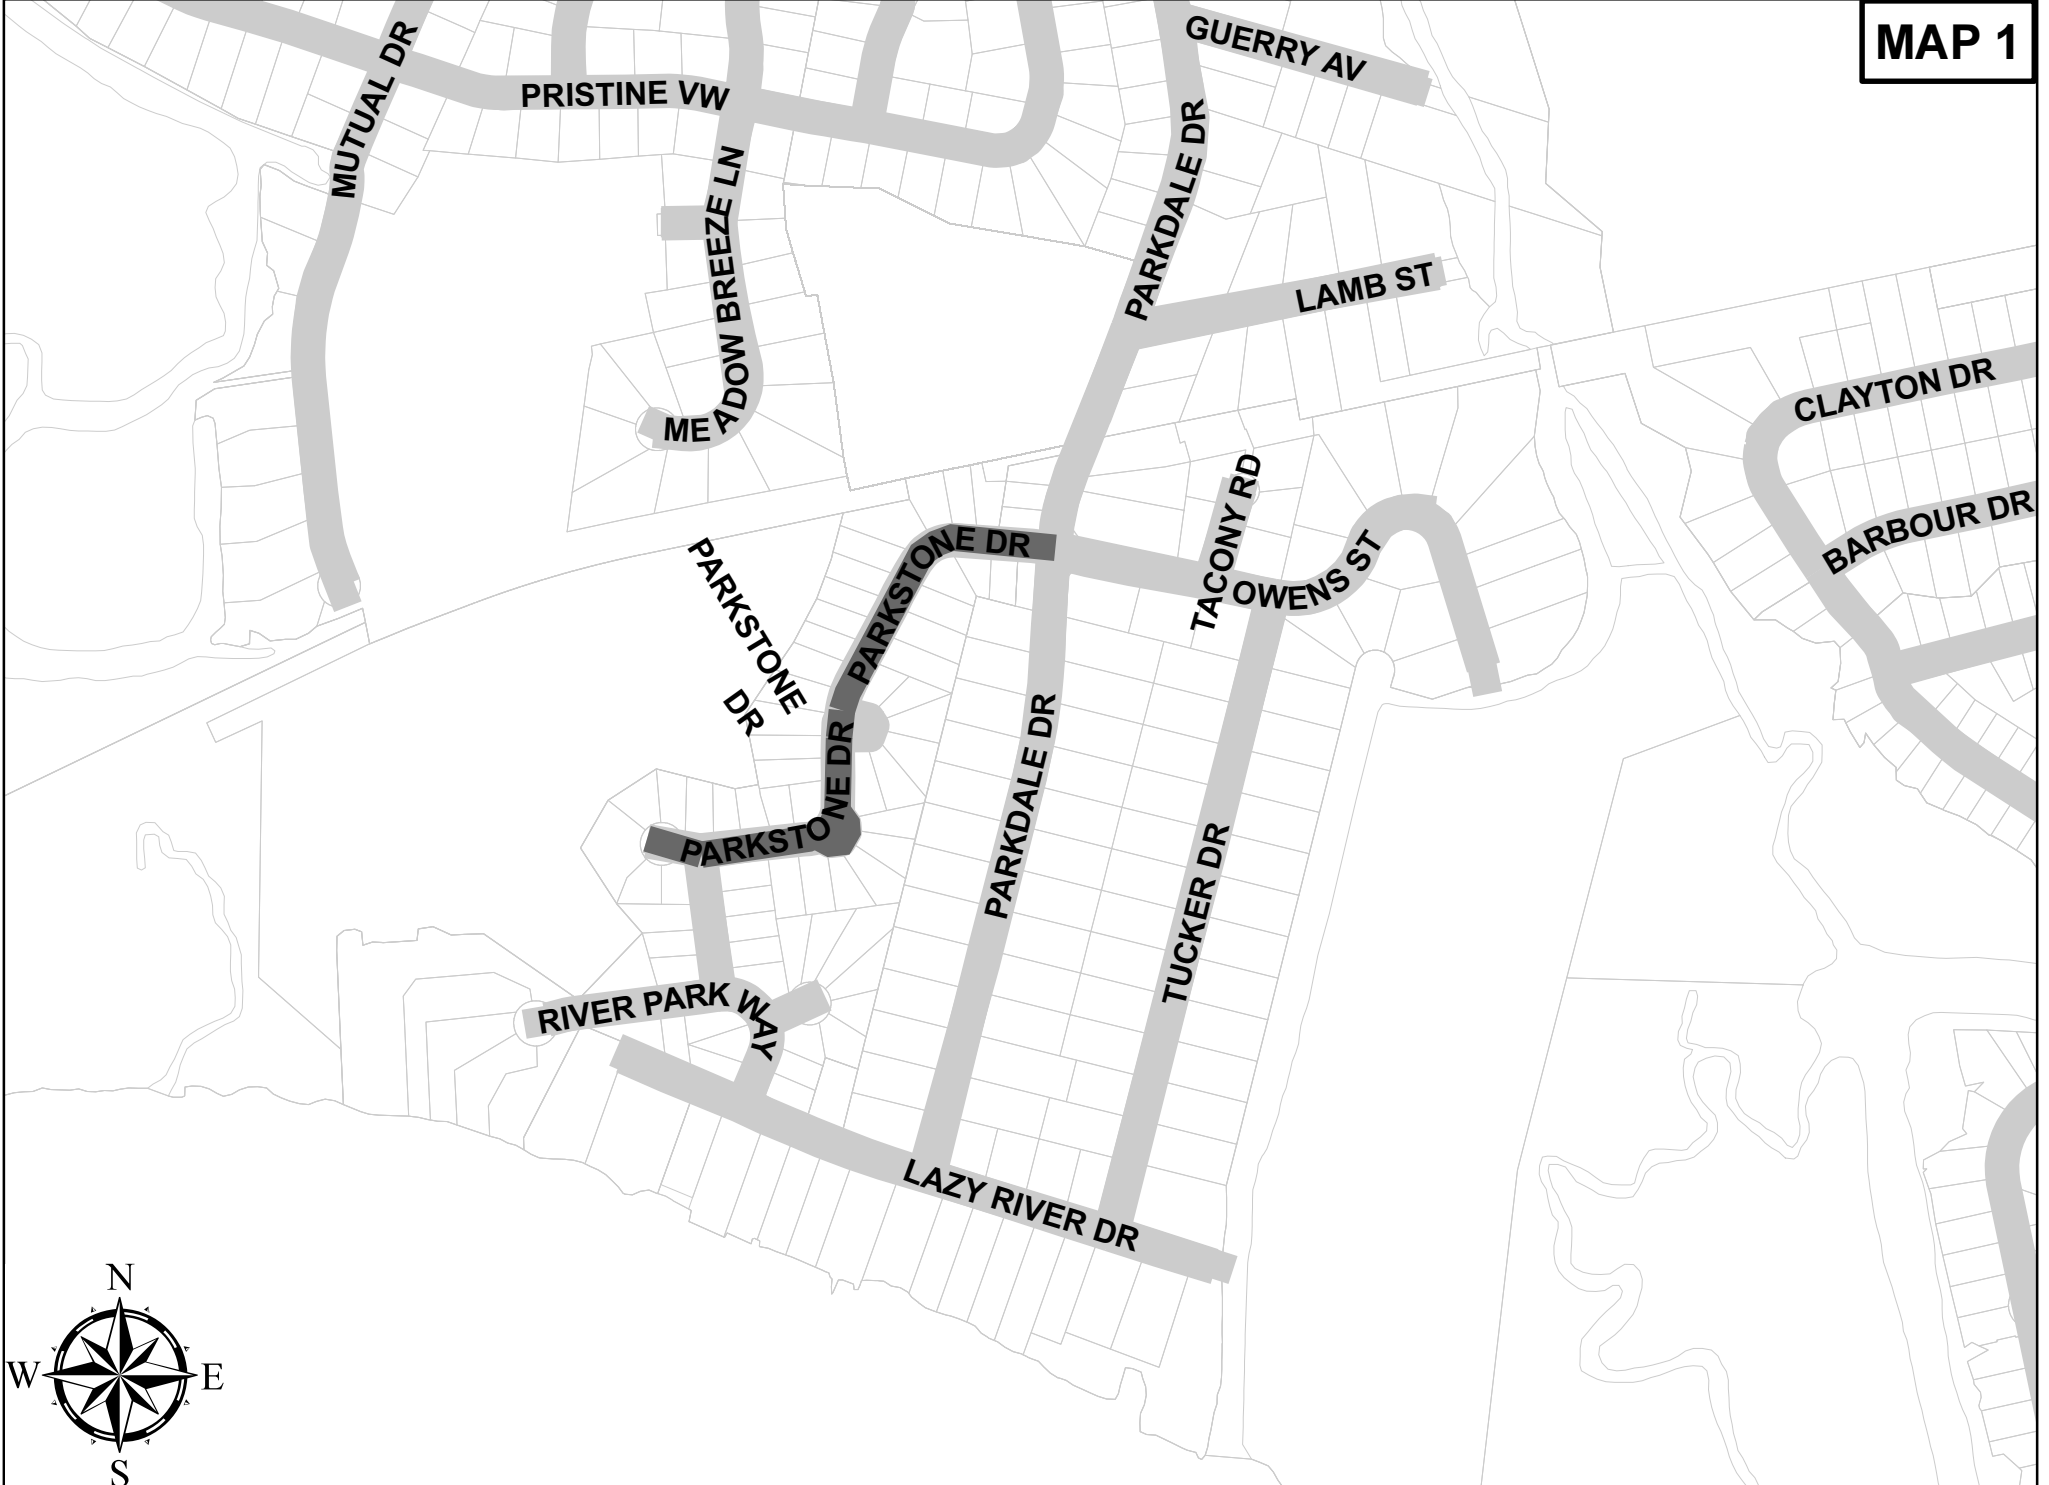


MapNumber	Route	2027000 REMOVAL & DISPOSAL OF EXISTING CONCRETE SIDEWALK *	4011004 LIQUID ASPHALT BINDER PG 64-22	4012040 "FULL DEPTH ASPH_ PAV_ PATCHING 4"" UNIFORM"	4013150 MILLING EXISTING ASPHALT PAVEMENT 1_5"	4013155 VARIABLE EDGE MILLING 1_5"	4113340 WARM MIX ASPHALT SURFACE COURSE TYPE C	7204100 CONCRETE SIDEWALK (4- IN UNIFORM)*	7204900 DETECTABLE WARNING SURFACE (Cast in place where applica	7209000 PEDESTRIAN RAMP CONSTRUCTION
1	PARKSTONE DR	190	22	550	4425	450	366	55	90	135
	Total	190	22	550	4425	450	366	55	90	135


MAP 2

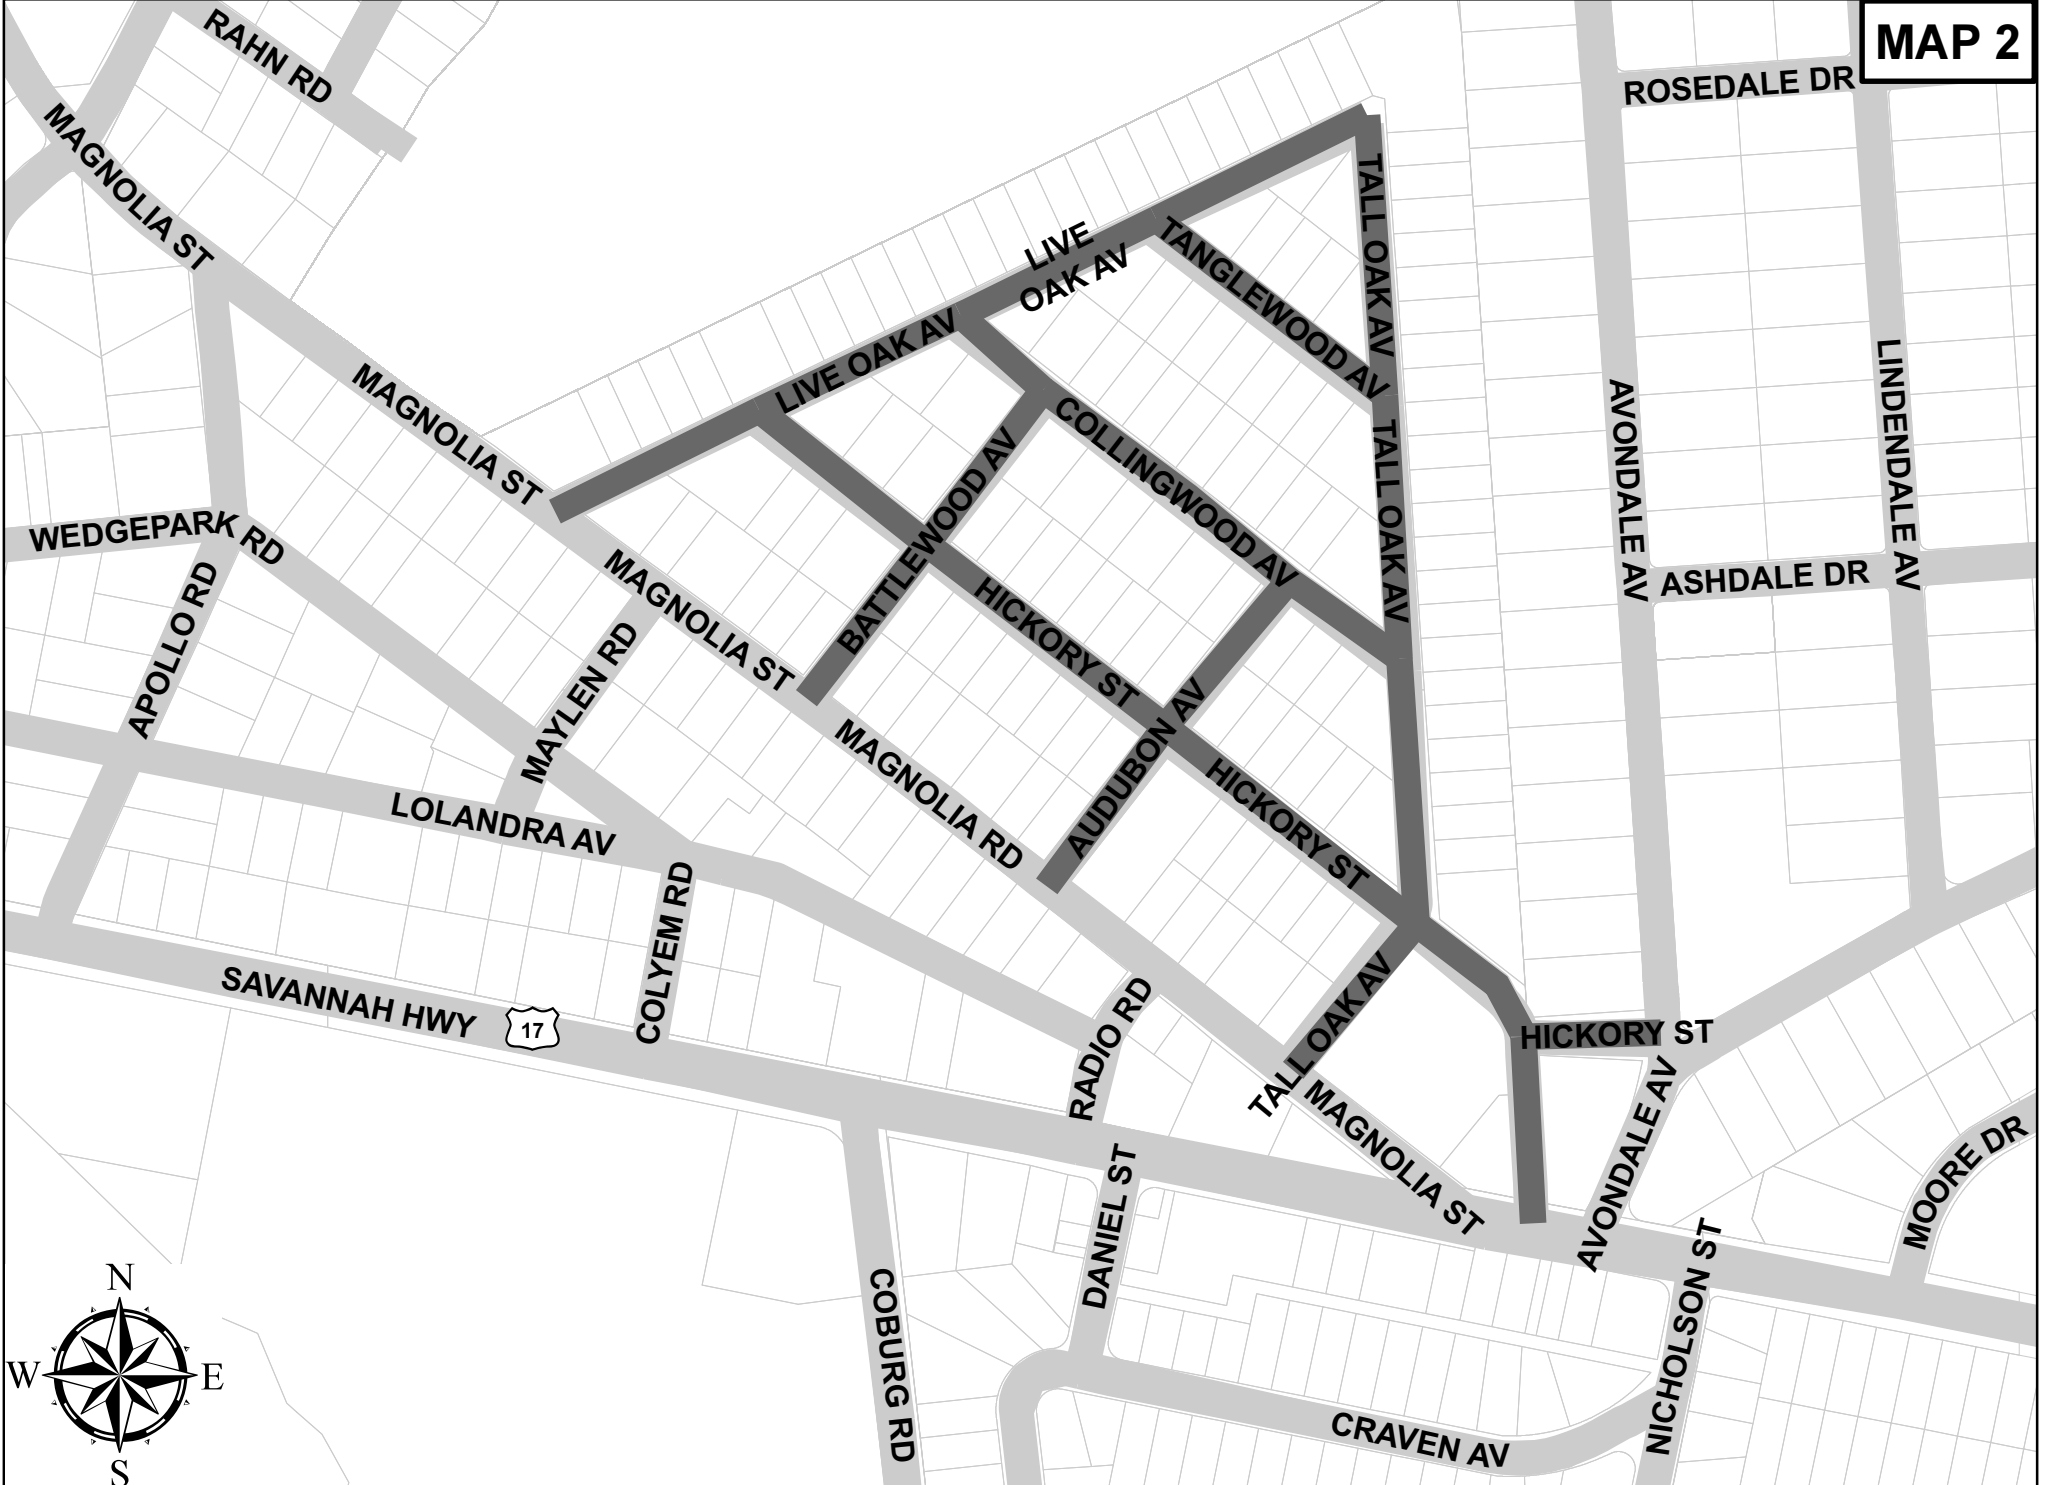

MapNumber	Route	2023000 REMOVAL & DISPOSAL OF EXISTING PAVEMENT (CONCRETE DRIVE	2024100 REMOVAL & DISPOSAL OF EXISTING CONCRETE GUTTER *	2027000 REMOVAL & DISPOSAL OF EXISTING CONCRETE SIDEWALK *	4011004 LIQUID ASPHALT BINDER PG 64-22	4012040 "FULL DEPTH ASPH_PAV_PATCHING 4" UNIFORM"	4012040D FULL DEPTH ASPH_PAV_PATCHING FOR DRIVES 4" UNIFORM	4013150 MILLING EXISTING ASPHALT PAVEMENT 1_5"	4113340 WARM MIX ASPHALT SURFACE COURSE TYPE C	4113340D WARM MIX ASPHALT SURFACE COURSE TYPE C FOR DRIVES & I	6241025 24" WHITE SOLID LINES (STOP/DIAG LINES)- PERM_PVMT_MARKI	6241074 4" YELLOW SOLID LINES(PVT_EDGE LINES) PERM_PVMT_MARKING	6250025 "24" WHITE SOLID LINES (STOP/DIAGONAL LINES) - EAST DR	6250110 "4" YELLOW SOLID LINE (PVT_EDGE & NO PASSING) - F	7197130 ADJUST DROP INLET	7203210 CONCRETE CURB AND GUTTER 2'0"	7204900 DETECTABLE WARNING SURFACE (Cast in place where applica	7205000 "CONCRETE DRIVEWAY (6" UNIFORM)"	7209000 PEDESTRIAN RAMP CONTRUCTION
2	AUDUBON AV	0	0	0	6	30	15	0	87	6	20	0	20	0	0	0	10	0	0
2	BATTLEWOOD AV	0	0	0	6	500	10	0	87	21	20	0	20	0	0	0	20	0	0
2	COLLINGWOOD AV	0	0	0	9	50	30	0	117	39	20	0	20	0	0	0	0	0	0
2	HICKORY ST	0	0	0	19	50	0	1650	318	0	100	160	100	160	0	0	0	0	0
2	LIVE OAK AV	0	0	0	14	220	20	0	190	48	20	0	20	0	0	0	0	0	0
2	TALL OAK AV	25	50	15	17	460	25	0	244	45	30	0	30	0	2	50	20	25	15
2	TANGLEWOOD AV	0	0	0	5	60	15	0	61	15	20	0	20	0	0	0	0	0	0
	Total	25	50	15	76	1370	115	1650	1104	174	230	160	230	160	2	50	50	25	15






MAP 4



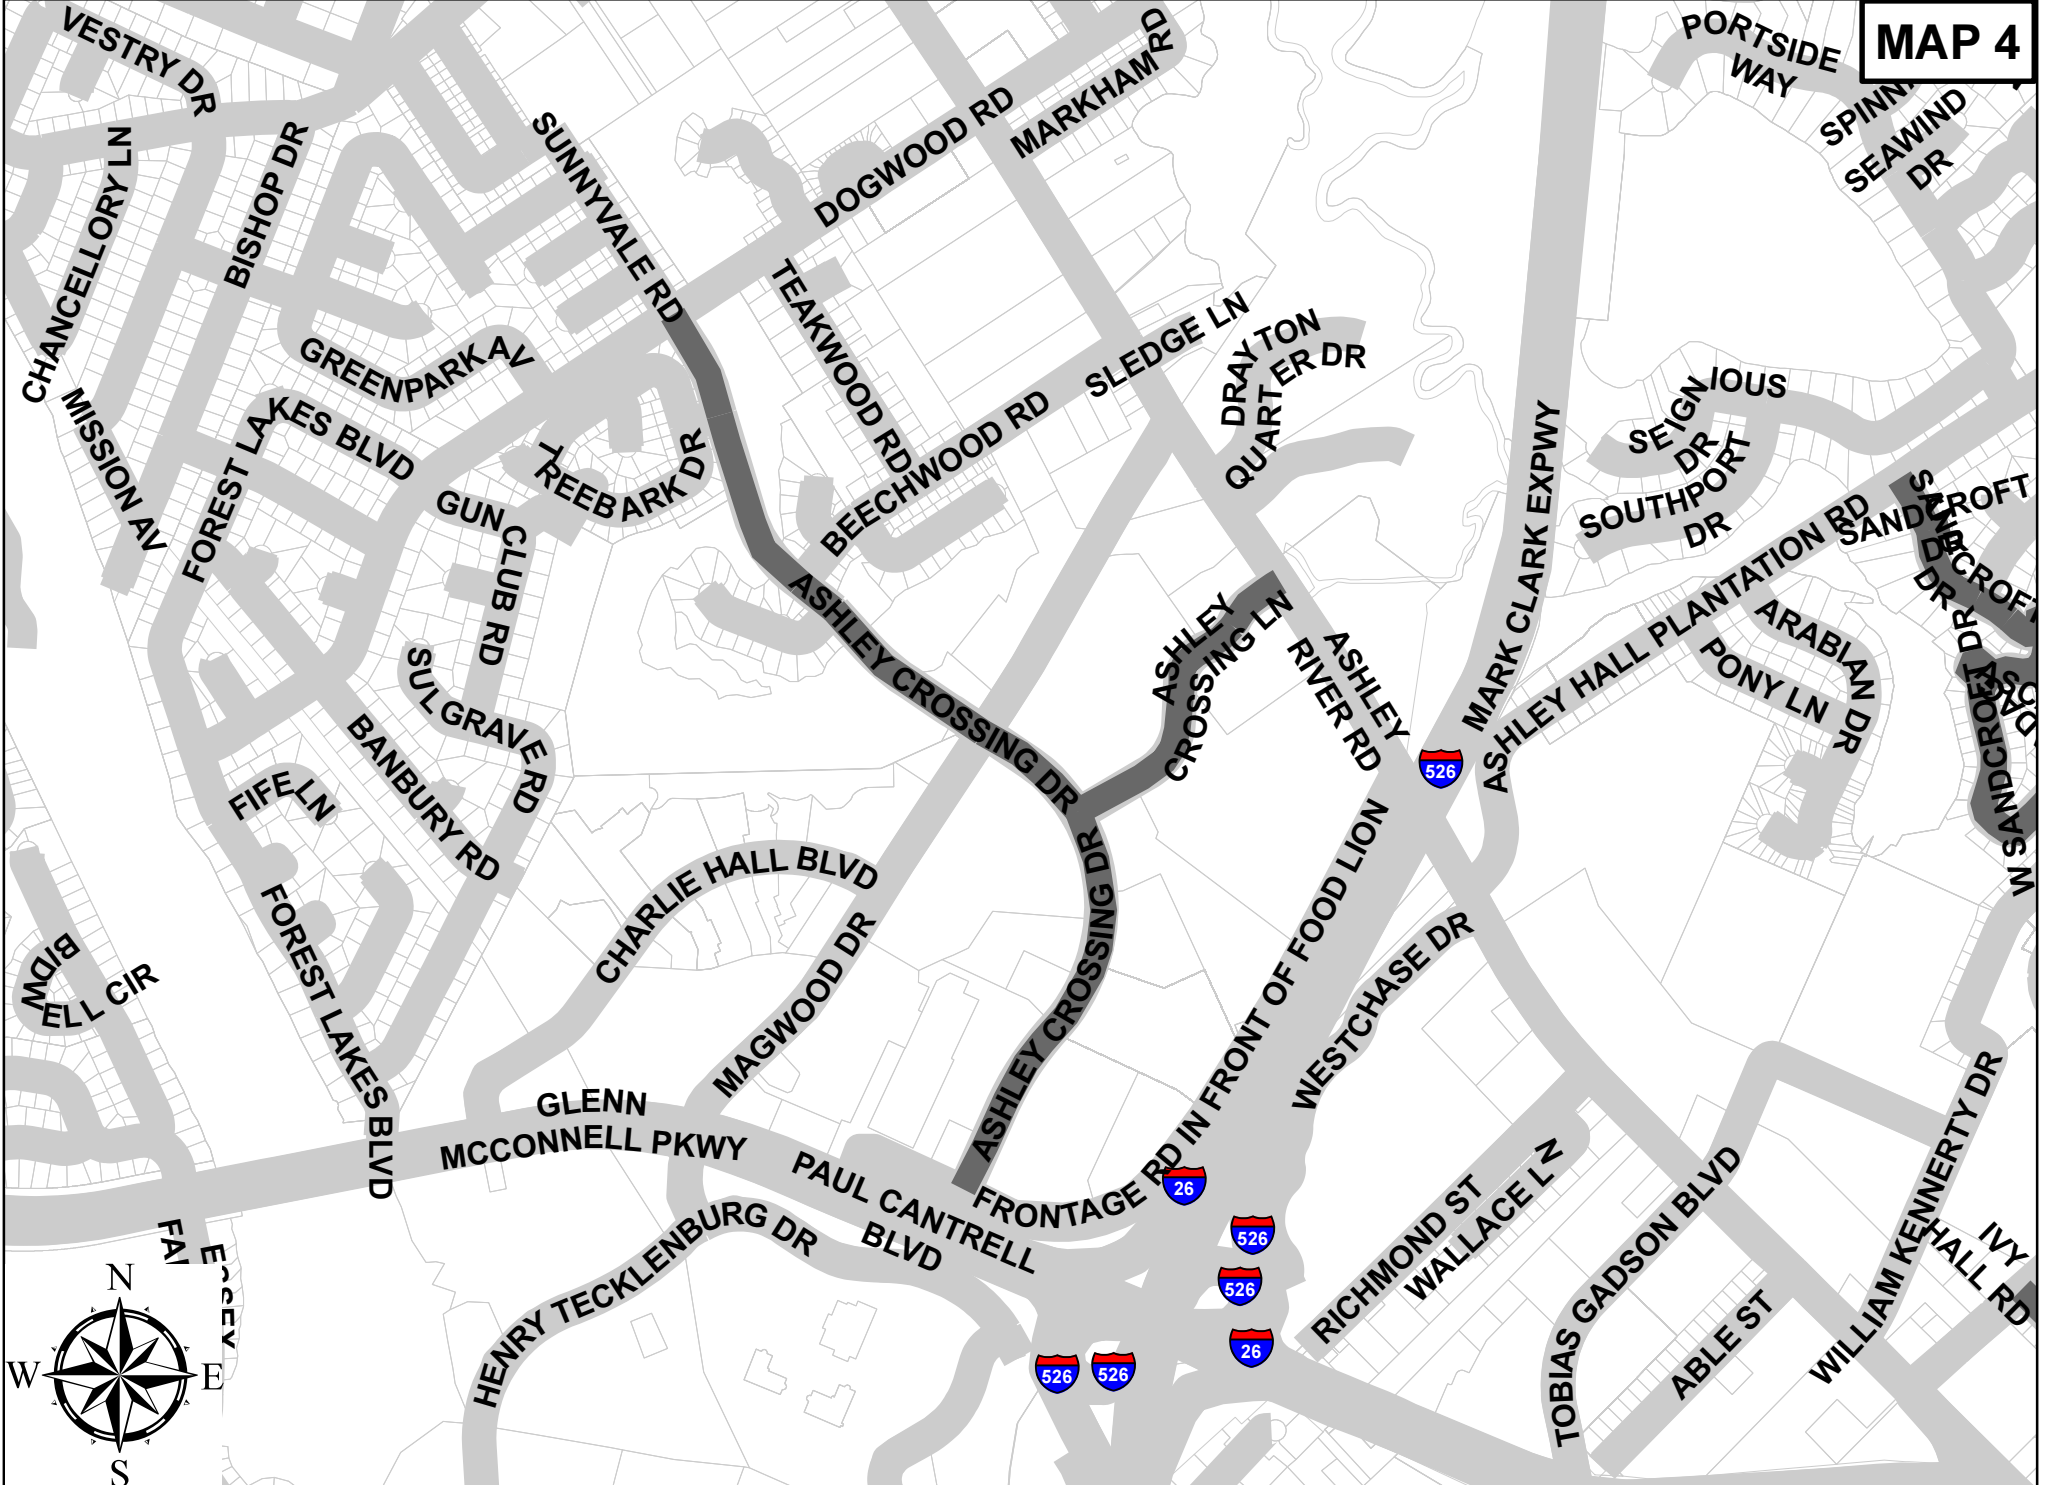


0 1,150 2,300 4,600 Feet

MAP 5



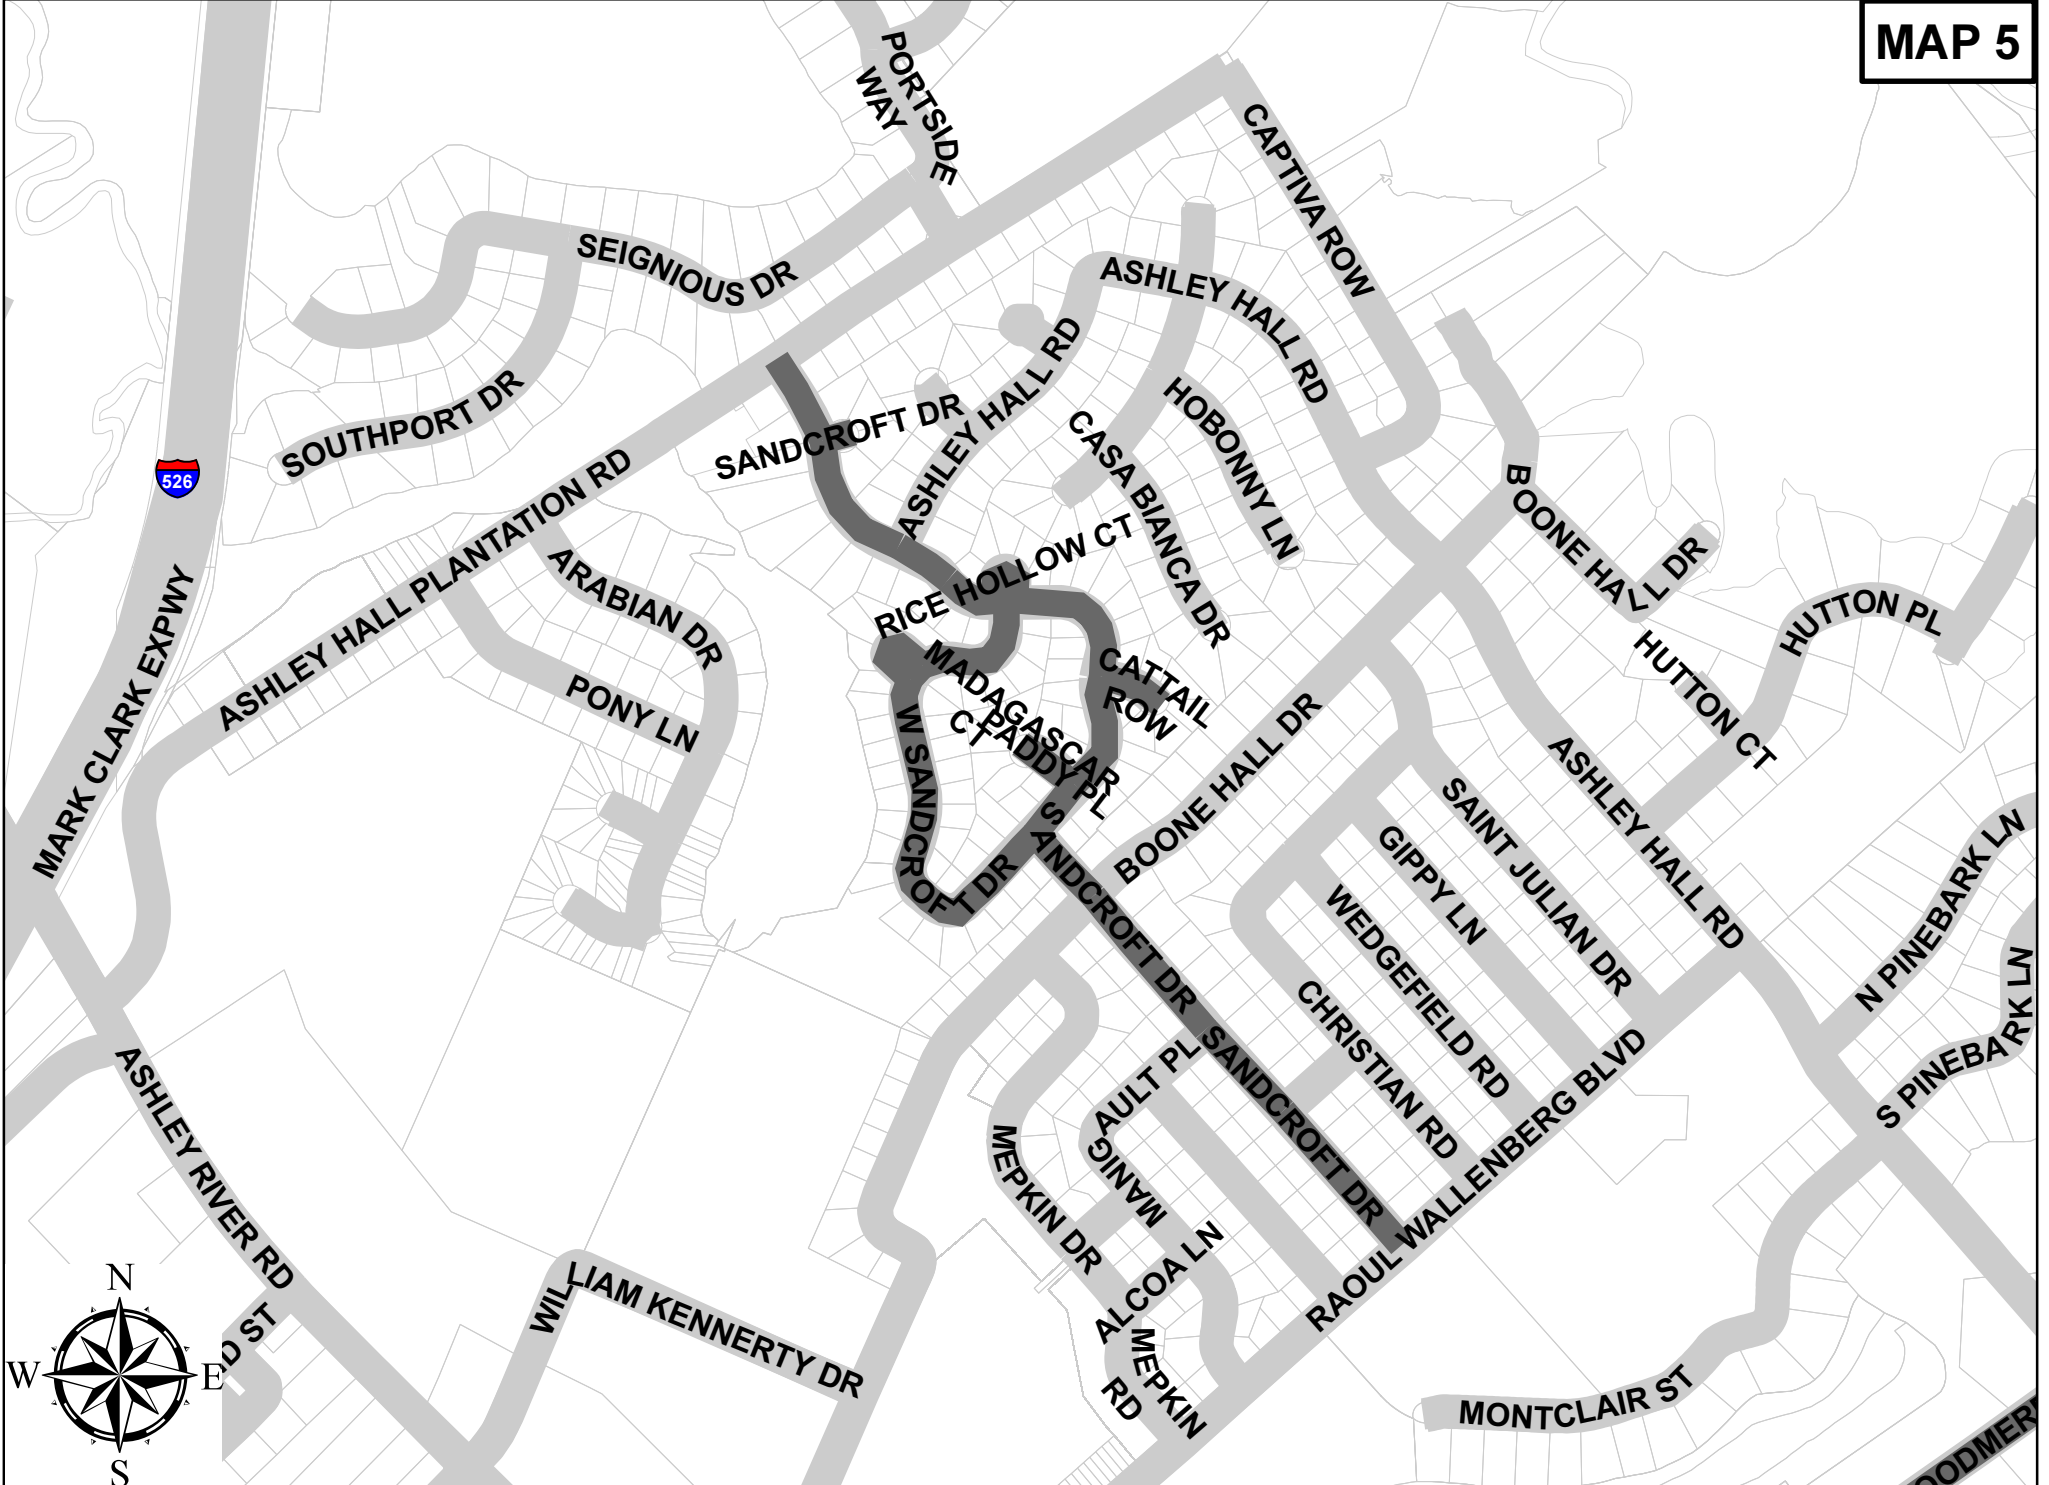


MapNumber	Route	2024100 REMOVAL & DISPOSAL OF EXISTING CONCRETE GUTTER *	4011004 LIQUID ASPHALT BINDER PG 64-22	4013150 MILLING EXISTING ASPHALT PAVEMENT 1_5"	4013155 VARIABLE EDGE MILLING 1_5"	4113340 WARM MIX ASPHALT SURFACE COURSE TYPE C	4113340D WARM MIX ASPHALT SURFACE COURSE TYPE C FOR DRIVES & I	6241023A 48IN X 48 IN WHITE YIELD TRIANGLE - PERM_PVMT_MARKING	6241025 24" WHITE SOLID LINES (STOP/DIAG LINES)- PERM_PVMT_MARKI	6250025 "24"" WHITE SOLID LINES (STOP/DIAGONAL LINES) - FAST DR	6251023 48IN X 48 IN WHITE YIELD TRIANGLE FAST DRY	7203120 CONCRETE CURB AND GUTTER(1'-6") - SLOPING FACE
5	CATTAIL ROW	0	3	555	0	42	0	0	0	0	0	0
5	MADAGASCAR CT	0	3	590	0	44	0	0	0	0	0	0
5	PADDY PL	0	3	580	0	44	0	0	0	0	0	0
5	RICE HOLLOW CT	40	2	485	0	37	0	0	10	10	0	40
5	SANDCROFT DR	20	53	4850	50	811	73	8	98	98	8	20
5	W SANDCROFT DR	10	21	4750	25	356	0	4	14	14	4	10
	Total	70	85	11810	75	1334	73	12	122	122	12	70



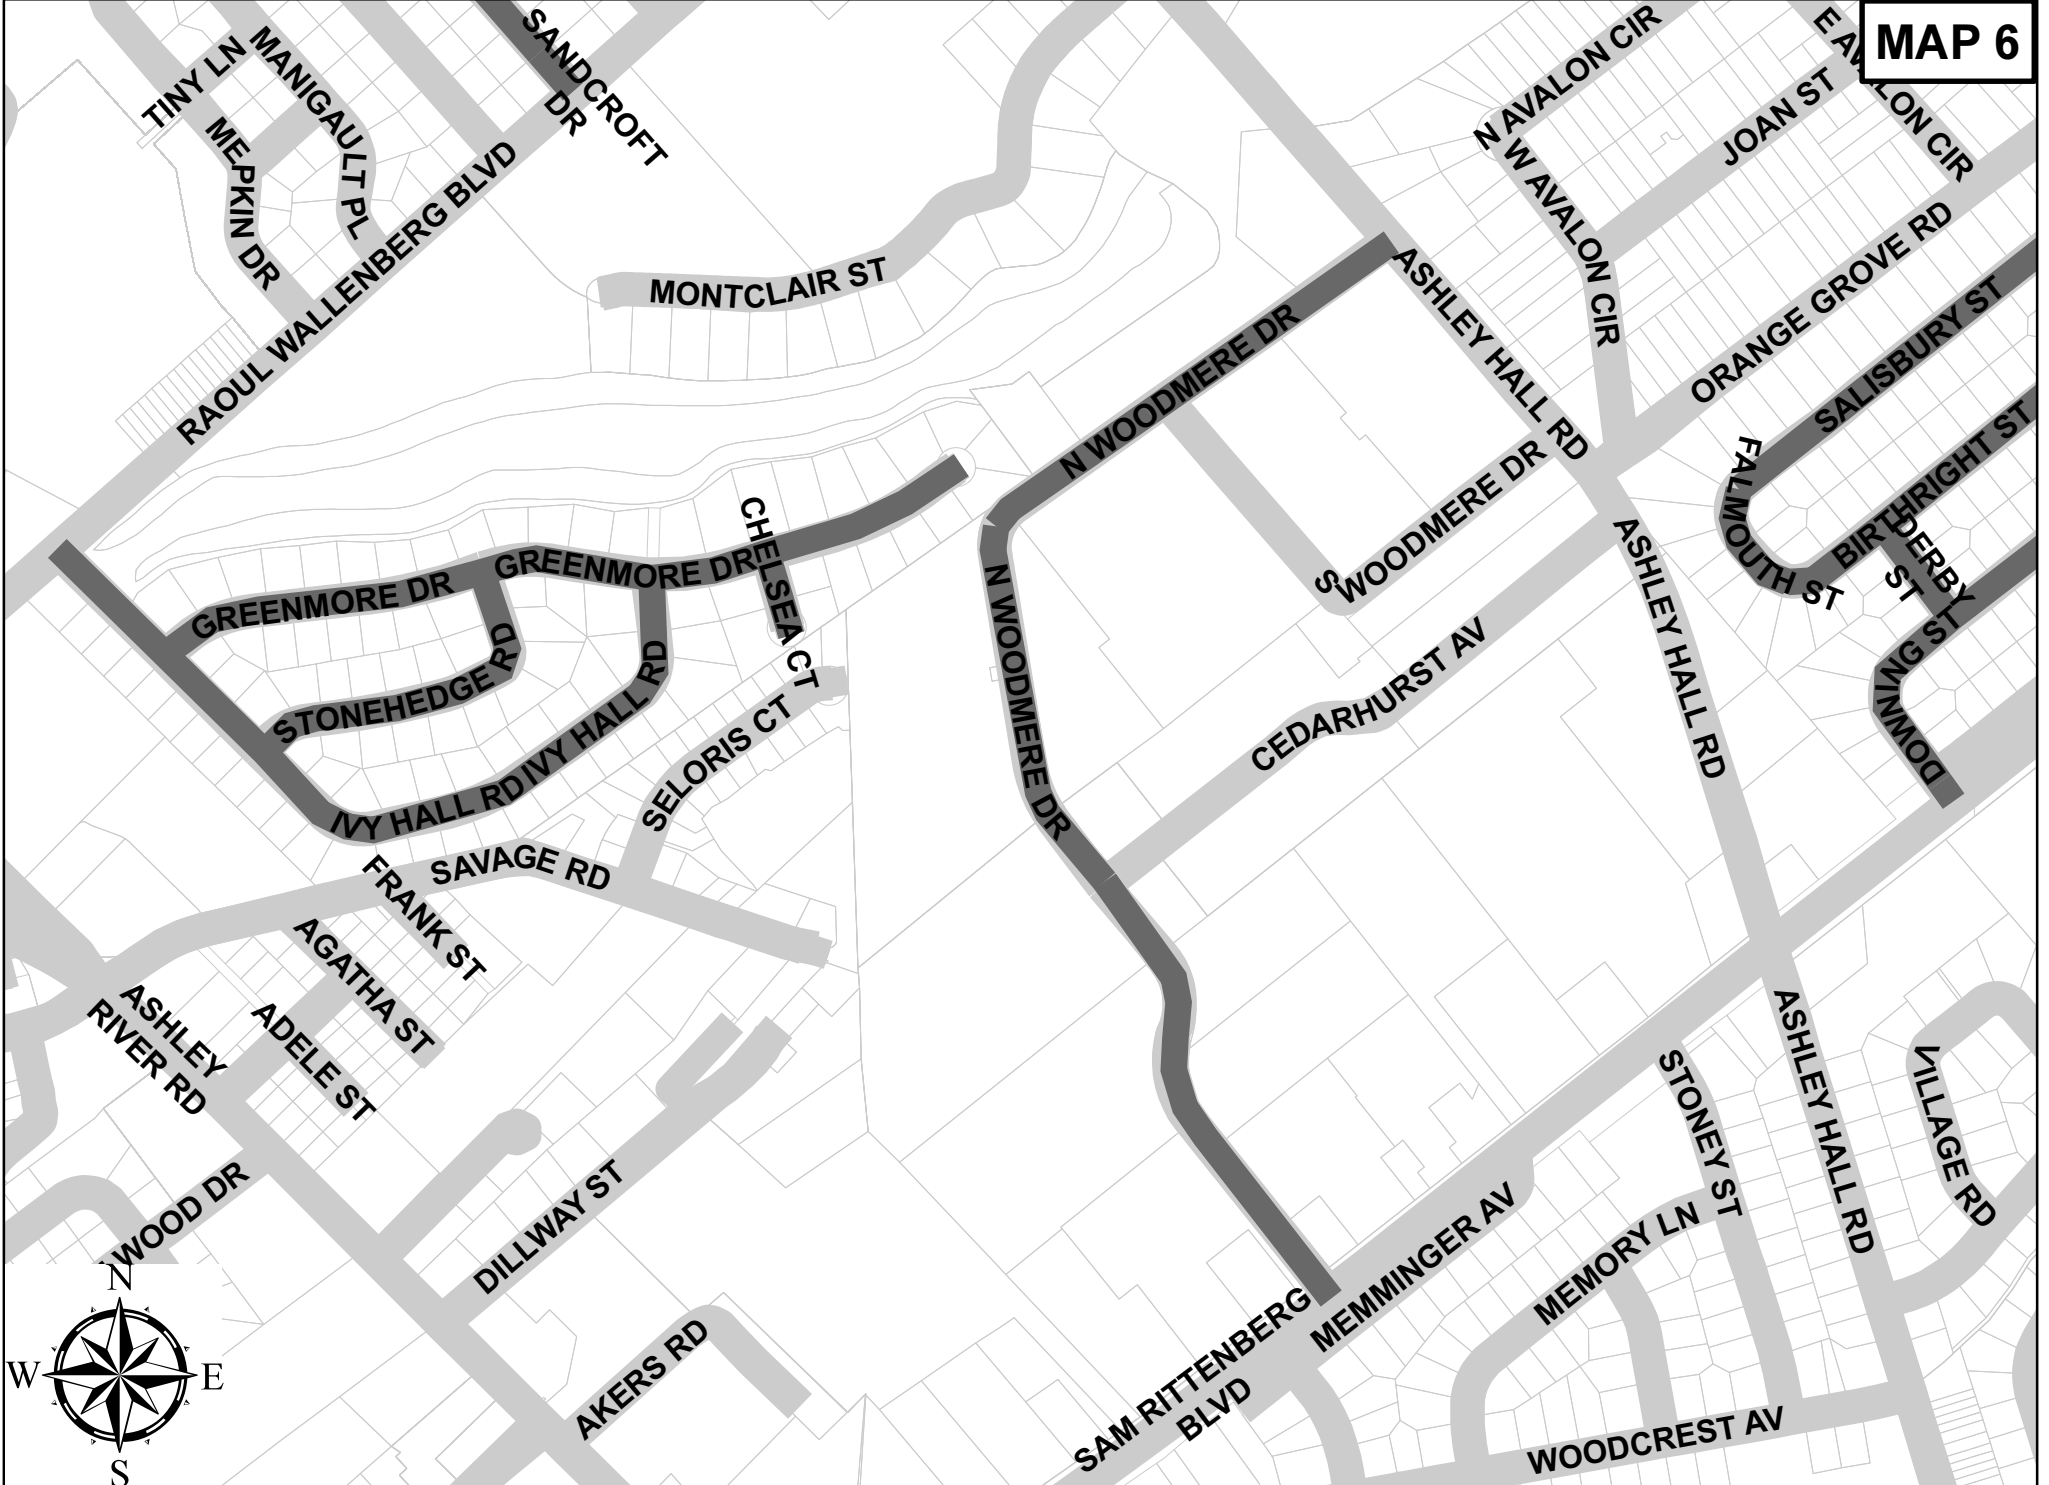


MapNumber	Route	2024100 REMOVAL & DISPOSAL OF EXISTING CONCRETE GUTTER *	4011004 LIQUID ASPHALT BINDER PG 64-22	4012040 "FULL DEPTH ASPH_PAV_PATCHING 4"" UNIFORM"	4013150 MILLING EXISTING ASPHALT PAVEMENT 1_5"	4013155 VARIABLE EDGE MILLING 1_5"	4113340 WARM MIX ASPHALT SURFACE COURSE TYPE C	4113340D WARM MIX ASPHALT SURFACE COURSE TYPE C FOR DRIVES & I	6241023A 48IN X 48 IN WHITE YIELD TRIANGLE - PERM_PVMT_MARKING	6241025 24" WHITE SOLID LINES (STOP/DIAG LINES)- PERM_PVMT_MARKI	6250025 "24"" WHITE SOLID LINES (STOP/DIAGONAL LINES) - FAST DR	6251023 48IN X 48 IN WHITE YIELD TRIANGLE FAST DRY	7203120 CONCRETE CURB AND GUTTER(1'-6") - SLOPING FACE
6	CHELSEA CT	0	3	0	690	0	52	0	0	12	12	0	0
6	GREENMORE DR	0	26	0	5850	25	440	0	4	12	12	4	0
6	IVY HALL RD	70	26	15	5850	25	440	0	4	24	24	4	10
6	N WOODMERE DR	270	55	225	12000	200	912	30	4	110	110	4	270
6	STONEHEDGE RD	0	11	20	2450	0	184	0	0	24	24	0	0
	Total	340	121	260	26840	250	2028	30	12	182	182	12	280



MAP 7

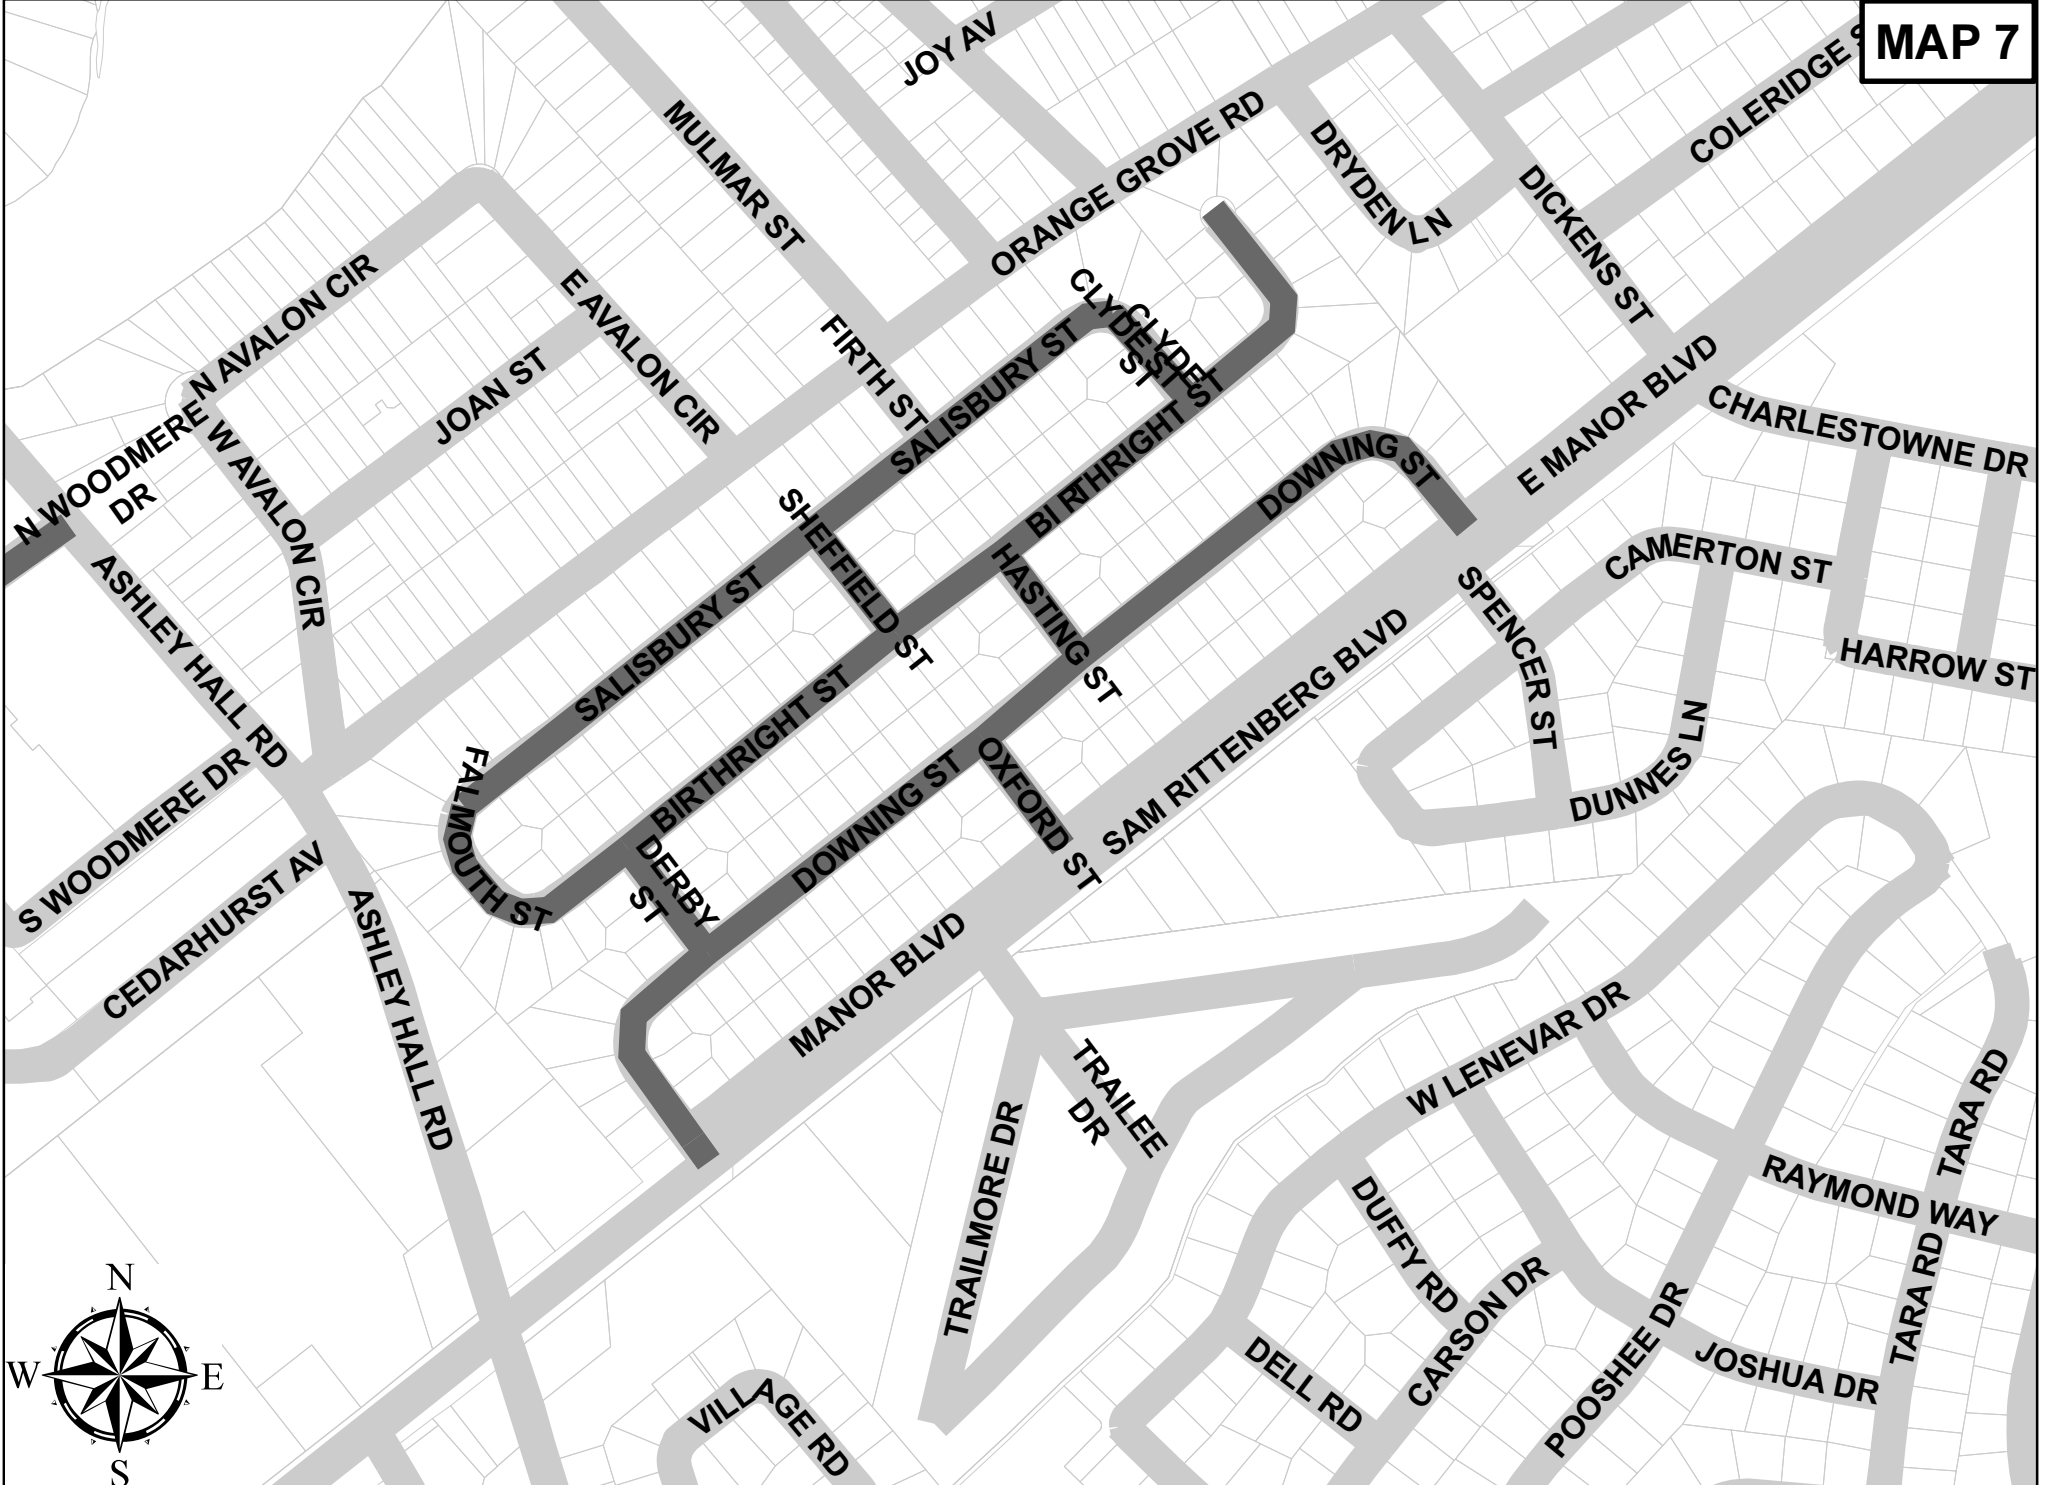




MapNumber	Route	2023000 REMOVAL & DISPOSAL OF EXISTING PAVEMENT (CONCRETE DRIVE	4011004 LIQUID ASPHALT BINDER PG 64-22	4012040 "FULL DEPTH ASPH_PAV_PATCHING 4"" UNIFORM"	4012040D FULL DEPTH ASPH_PAV_PATCHING FOR DRIVES 4" UNIFORM	4013155 VARIABLE EDGE MILLING 1_5"	4113340 WARM MIX ASPHALT SURFACE COURSE TYPE C	4113340D WARM MIX ASPHALT SURFACE COURSE TYPE C FOR DRIVES & I	6241023A 48IN X 48 IN WHITE YIELD TRIANGLE - PERM_PVMT_MARKING	6241025 24" WHITE SOLID LINES (STOP/DIAG LINES)- PERM_PVMT_MARKI	6241074 4" YELLOW SOLID LINES(PVT_EDGE LINES) PERM_PVMT_MARKING	6250025 "24"" WHITE SOLID LINES (STOP/DIAGONAL LINES) - FAST DR	6250110 "4"" YELLOW SOLID LINE (PVT_EDGE & NO PASSING) - F	6251023 48IN X 48 IN WHITE YIELD TRIANGLE FAST DRY	7205000 "CONCRETE DRIVEWAY (6"" UNIFORM)"
7	BIRTHRIGHT ST	25	25	60	0	50	422	60	12	0	510	0	510	12	25
7	CLYDE ST	0	3	0	0	0	44	12	0	10	500	10	500	0	0
7	DERBY ST	0	3	0	5	0	49	9	0	20	140	20	140	0	0
7	DOWNING ST	25	34	40	35	75	466	105	16	24	1910	24	1910	16	25
7	FALMOUTH ST	0	4	0	0	0	51	9	0	0	600	0	600	0	0
7	HASTING ST	0	3	0	0	0	46	6	0	20	120	20	120	0	0
7	OXFORD ST	0	4	60	0	0	50	15	0	20	0	20	0	0	0
7	SALISBURY ST	125	21	40	15	50	307	38	12	12	740	12	740	12	125
7	SHEFFIELD ST	0	3	0	0	0	49	3	0	22	120	22	120	0	0
	Total	175	100	200	55	175	1484	257	40	128	4640	128	4640	40	175

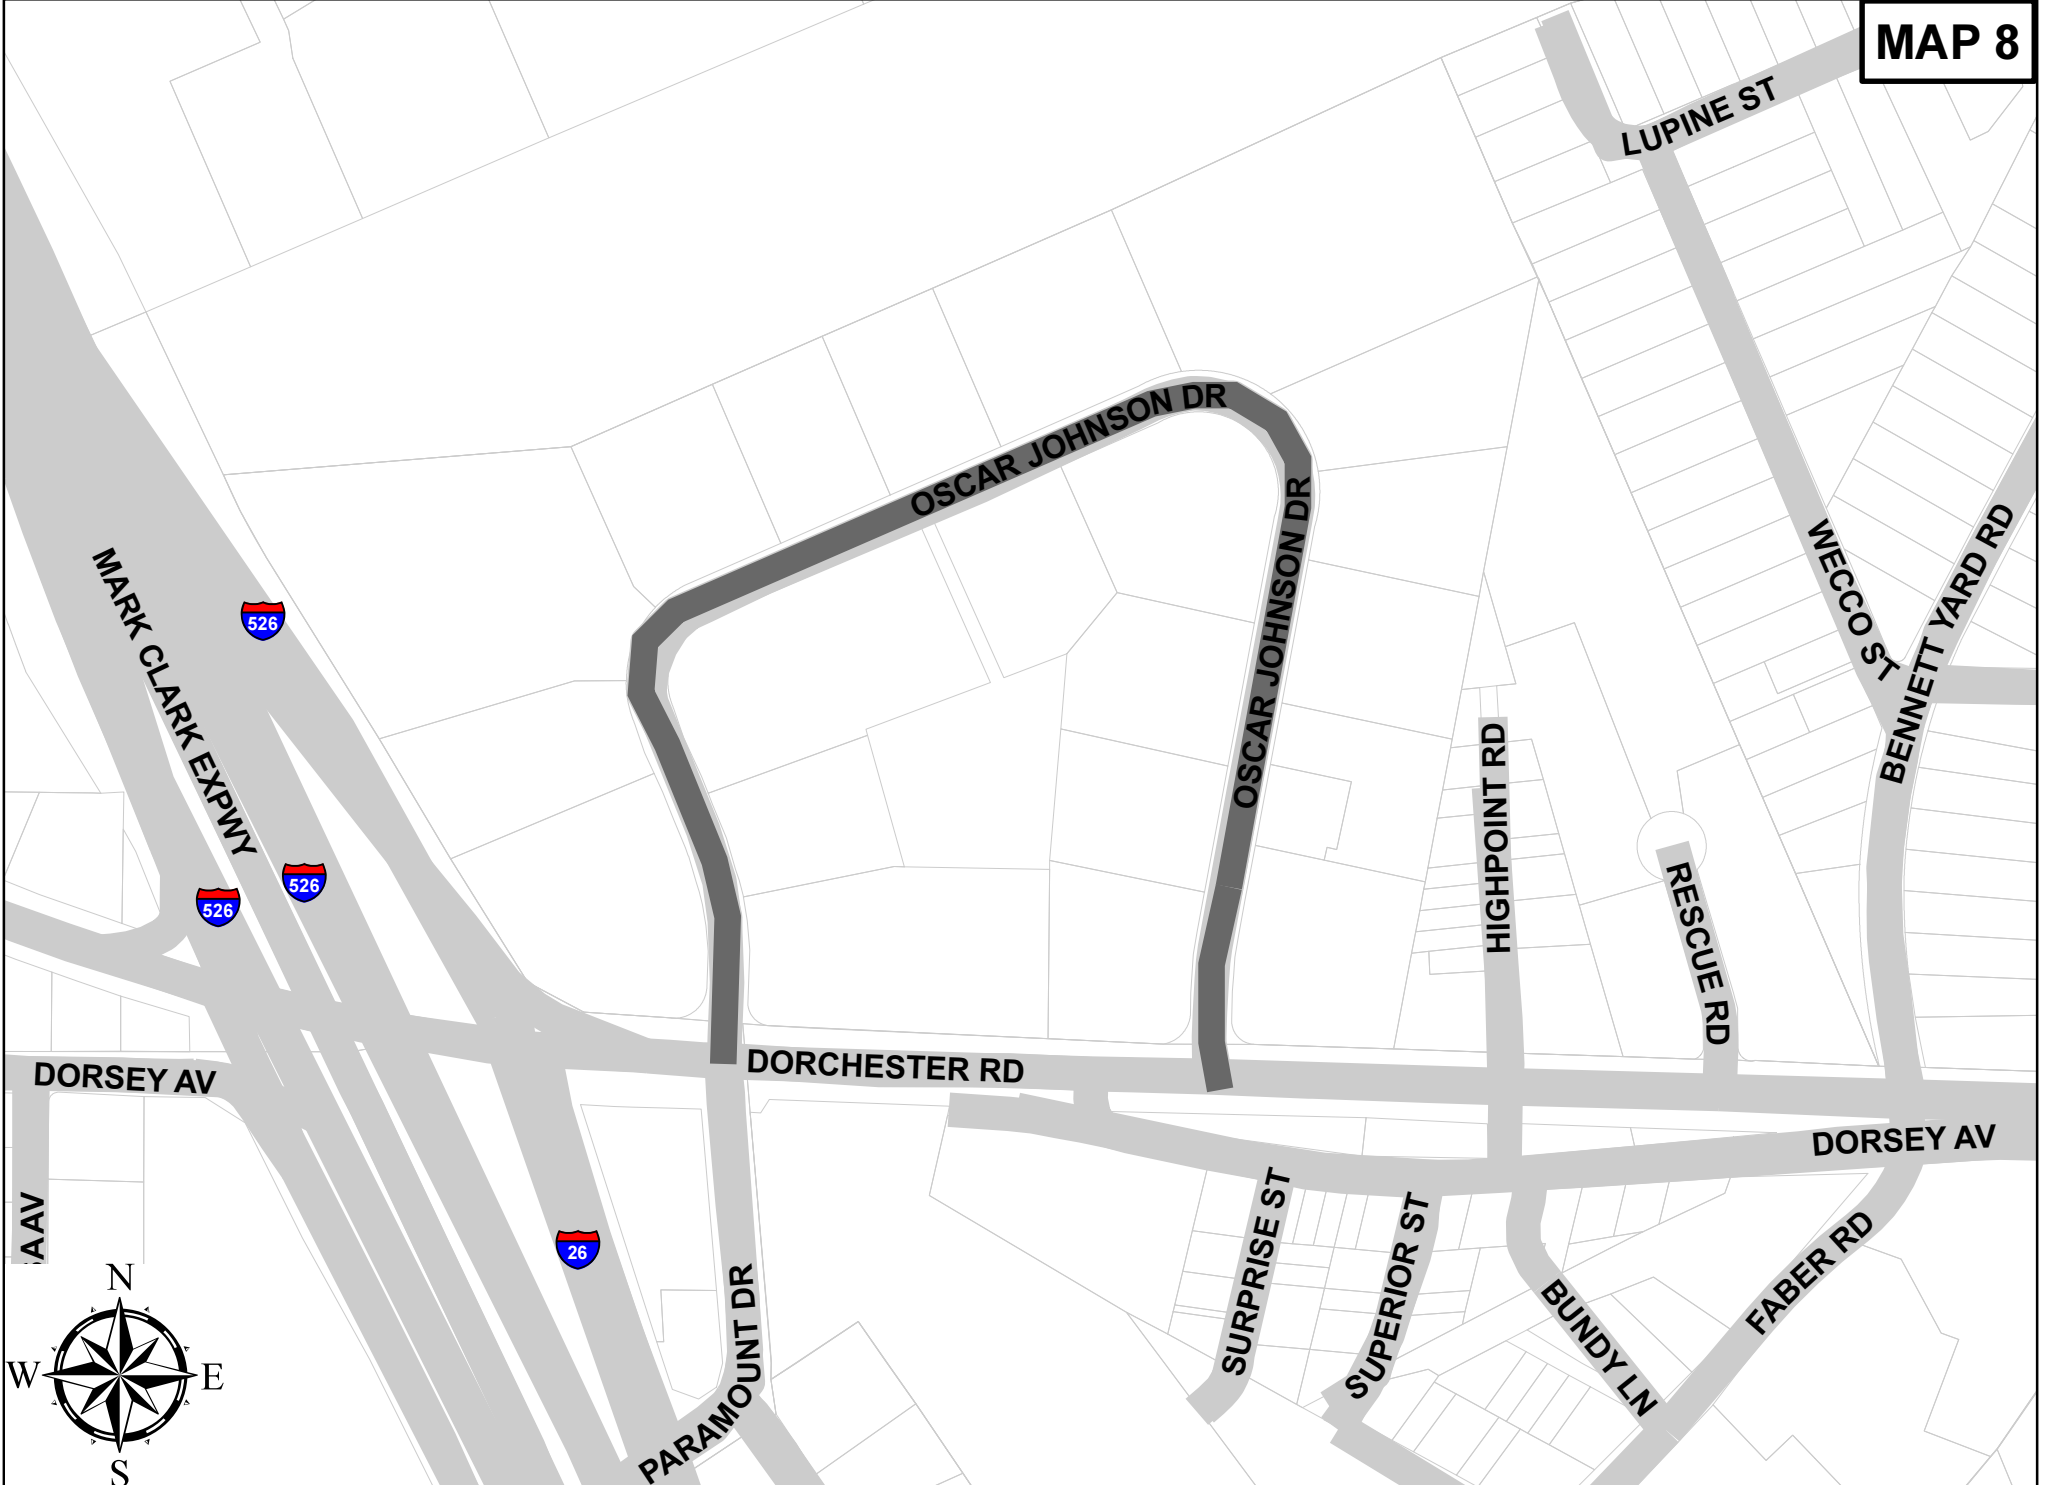


MapNumber	Route	2024100 REMOVAL & DISPOSAL OF EXISTING CONCRETE GUTTER *	2027000 REMOVAL & DISPOSAL OF EXISTING CONCRETE SIDEWALK *	4011004 LIQUID ASPHALT BINDER PG 64-22	4012040 "FULL DEPTH ASPH_PAV_PATCHING 4" UNIFORM"	4013150 MILLING EXISTING ASPHALT PAVEMENT 1 5"	4113340 WARM MIX ASPHALT SURFACE COURSE TYPE C	6241025 24" WHITE SOLID LINES (STOP/DIAG LINES)- PERM_PVMT_MARKI	6241074 4" YELLOW SOLID LINES(PVT_EDGE LINES) PERM_PVMT_MARKING	6250025 "24" WHITE SOLID LINES (STOP/DIAGONAL LINES) - FAST DR	6250110 "4" YELLOW SOLID LINE (PVT_EDGE & NO PASSING) - F	675XXX TRAFFIC LIGHT TIMING LOOPS- MOTORCYCLE SENSITIVE (COMPL	7197130 ADJUST DROP INLET	7203120 CONCRETE CURB AND GUTTER(1'-6") - SLOPING FACE	7204100 CONCRETE SIDEWALK (4-IN UNIFORM)*
8	OSCAR JOHNSON DR	250	20	40	650	7600	670	26	4950	26	4950	2	1	250	20
	Total	250	20	40	650	7600	670	26	4950	26	4950	2	1	250	20



MapNumber	Route	4011004 LIQUID ASPHALT BINDER PG 64-22	4012040 "FULL DEPTH ASPH_PAV_PATCHING 4" UNIFORM"	4012040D FULL DEPTH ASPH_PAV_PATCHING FOR DRIVES 4" UNIFORM	4113340 WARM MIX ASPHALT SURFACE COURSE TYPE C	6241025 24" WHITE SOLID LINES (STOP/DIAG LINES)- PERM_PVMT_MARKI	6250025 "24" WHITE SOLID LINES (STOP/DIAGONAL LINES) - FAST DR
9	KEEVER ST	3	50	0	52	12	12
9	ROOSEVELT ST	2	100	10	34	10	10
9	RUMSEY ST	3	0	0	55	0	0
9	TRUMAN AV	5	100	10	89	24	24
	Total	13	250	20	230	46	46

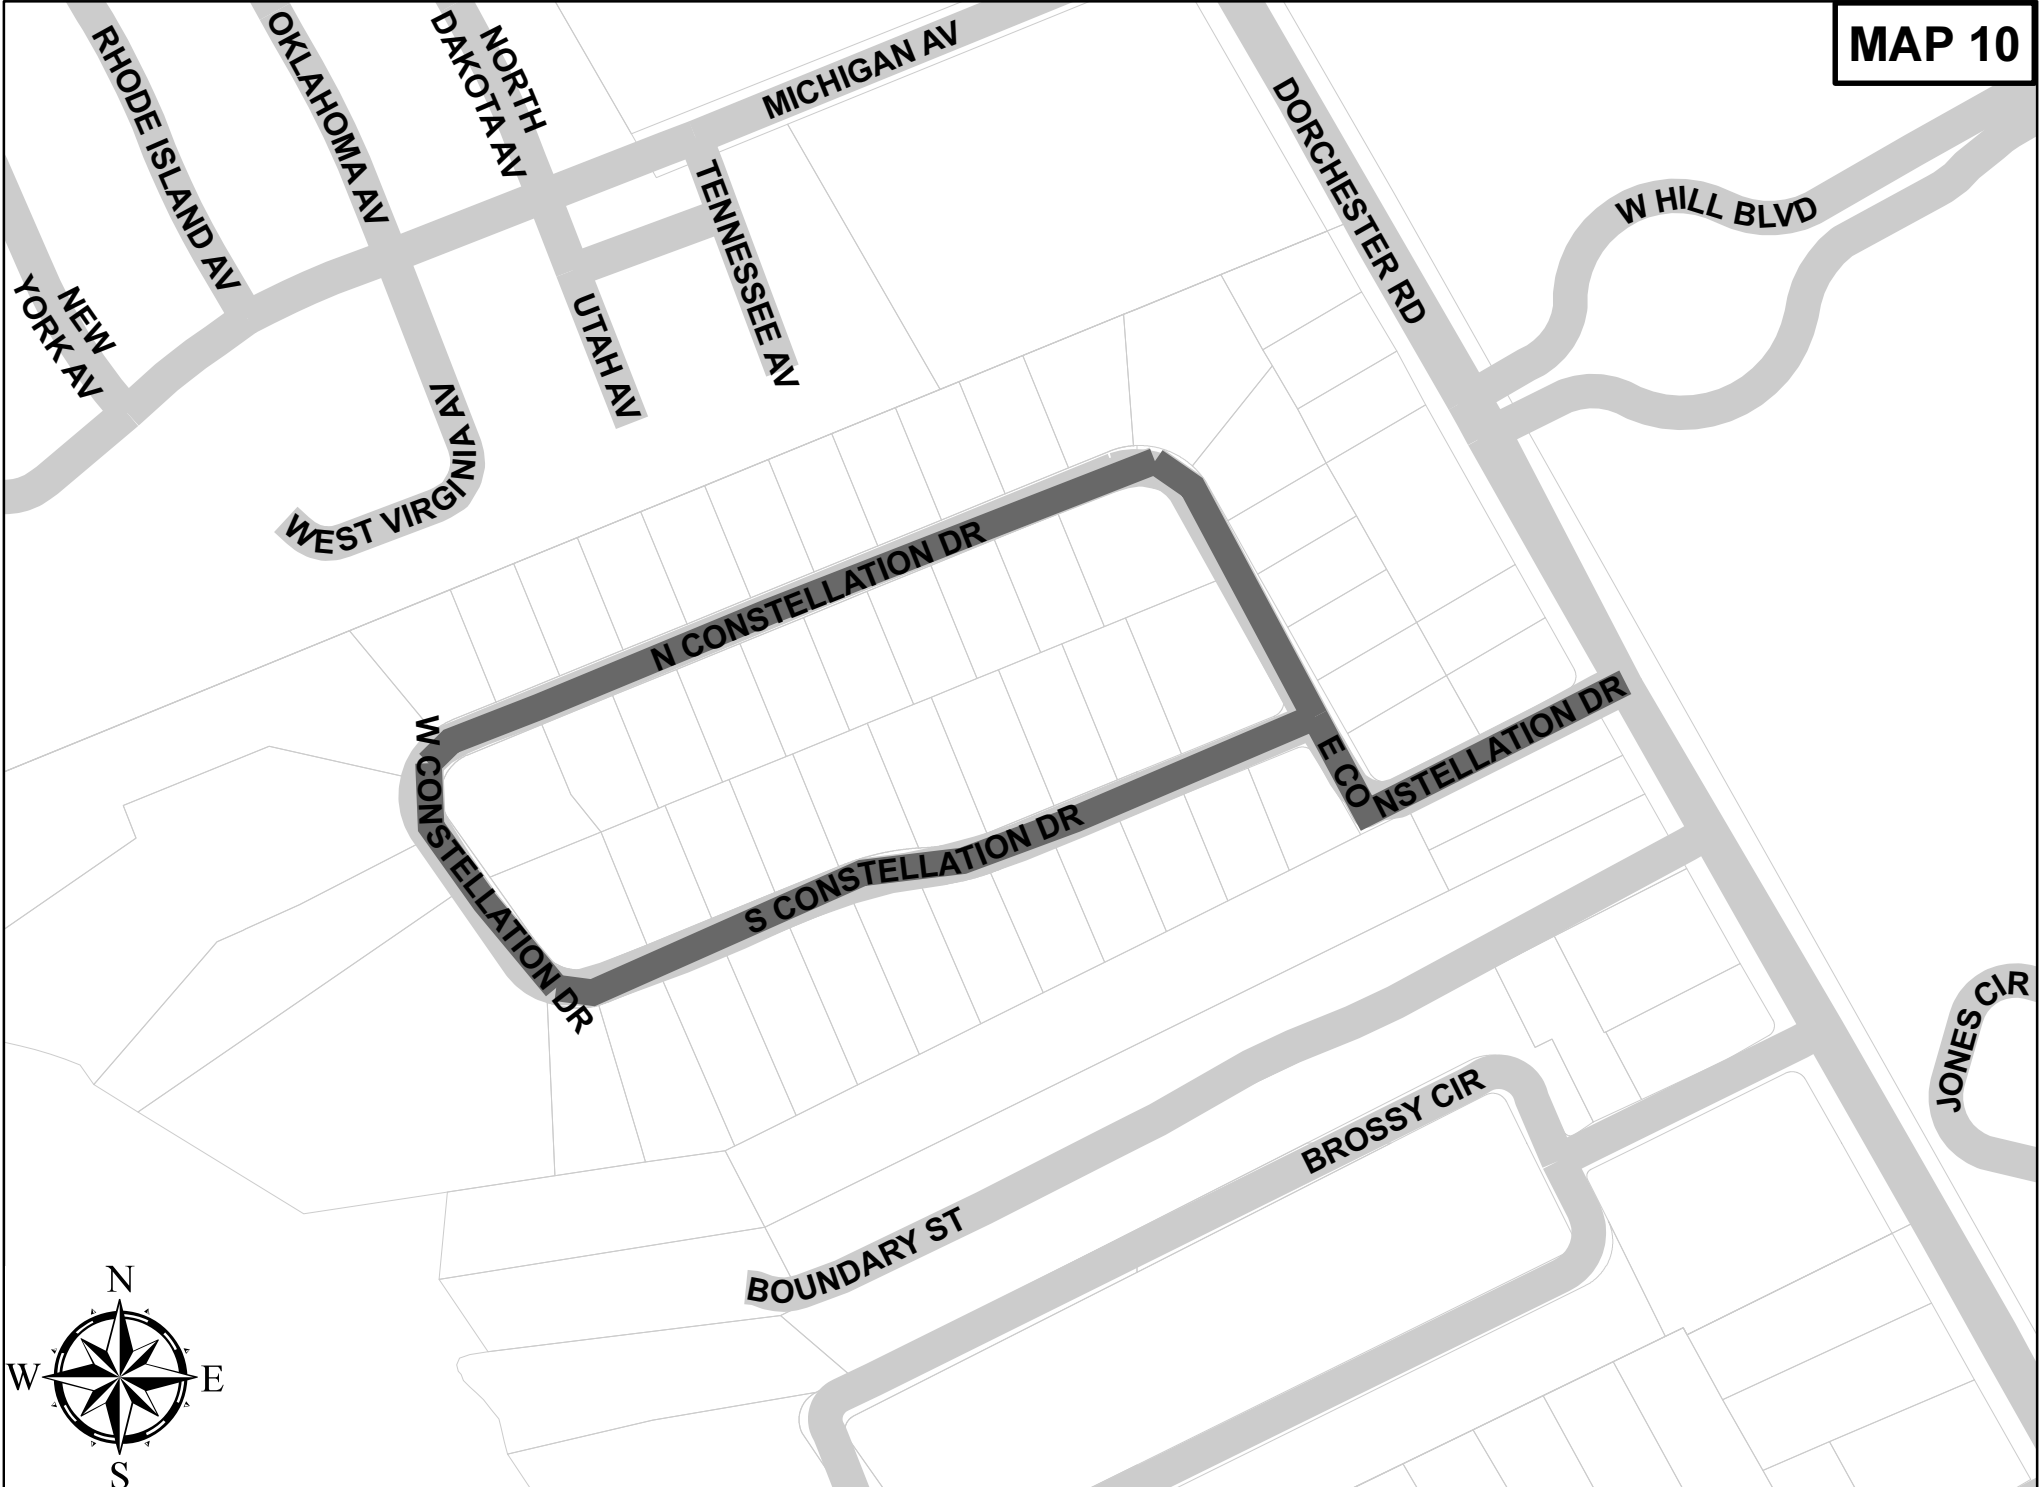


MapNumber	Route	4011004 LIQUID ASPHALT BINDER PG 64-22	4012040 "FULL DEPTH ASPH_ PAV_PATCHING 4"" UNIFORM"	4012040D FULL DEPTH ASPH_ PAV_PATCHING FOR DRIVES 4" UNIFORM	4113340 WARM MIX ASPHALT SURFACE COURSE TYPE C	4113340D WARM MIX ASPHALT SURFACE COURSE TYPE C FOR DRIVES & I	6241025 24" WHITE SOLID LINES (STOP/DIAG LINES)- PERM_PVMT_MARKI	6241074 4" YELLOW SOLID LINES(PVT_EDGE LINES) PERM_PVMT_MARKING	6250025 "24"" WHITE SOLID LINES (STOP/DIAGONAL LINES) - FAST DR	6250110 "4"" YELLOW SOLID LINE (PVT_EDGE & NO PASSING) - F	6301100 "PERMANENT YELLOW PAVEMENT MARKER BI- DIR_ 4""
10	E CONSTELLATION DR	12	20	10	170	30	12	1675	12	1675	13
10	N CONSTELLATION DR	14	20	20	189	48	0	2135	0	2135	14
10	S CONSTELLATION DR	15	160	0	195	60	11	2035	11	2035	15
10	W CONSTELLATION DR	4	20	15	64	0	0	710	0	710	6
	Total	45	220	45	618	138	23	6555	23	6555	48



0 800 1,600 3,200 Feet

MapNumber	Route	2023000 REMOVAL & DISPOSAL OF EXISTING PAVEMENT (CONCRETE DRIVE	2024100 REMOVAL & DISPOSAL OF EXISTING CONCRETE GUTTER *	2027000 REMOVAL & DISPOSAL OF EXISTING CONCRETE SIDEWALK *	4011004 LIQUID ASPHALT BINDER PG 64-22	4012040 "FULL DEPTH ASPH_PAV_PATCHING 4"" UNIFORM"	4013150 MILLING EXISTING ASPHALT PAVEMENT 1_5"	4013200 "MILLING EXISTING ASPHALT PAVEMENT 2""	4013990 "VARIABLE MILLING EXISTING ASPHALT PAVEMENT 0" TO 1"	4113340 WARM MIX ASPHALT SURFACE COURSE TYPE C	4113340D WARM MIX ASPHALT SURFACE COURSE TYPE C FOR DRIVES & I	6241025 24" WHITE SOLID LINES (STOP/DIAG LINES)- PERM_PVMT_MARKI	6250025 "24"" WHITE SOLID LINES (STOP/DIAGONAL LINES) - FAST DR	7197130 ADJUST DROP INLET	7203120 CONCRETE CURB AND GUTTER(1'-6") - SLOPING FACE	7204100 CONCRETE SIDEWALK (4-IN UNIFORM)*	7204900 DETECTABLE WARNING SURFACE (Cast in place where applica	7205000 "CONCRETE DRIVEWAY (6"" UNIFORM)"	7209000 PEDESTRIAN RAMP CONSTRUCTION
11	BROADMOORE PL	0	30	0	13	40	2640	0	0	200	5	36	36	0	30	0	0	0	0
11	DUBLIN RD	0	60	205	35	0	7820	0	0	586	5	52	52	0	60	85	80	0	120
11	GLENHAVEN SHORES	0	50	0	18	150	4075	0	0	305	0	28	28	0	50	0	0	0	0
11	HILLDALE RD	0	50	0	33	40	7350	0	0	550	10	52	52	0	50	0	0	0	0
11	HILLVIEW LN	0	0	0	19	0	4300	0	0	322	0	26	26	0	0	0	0	0	0
11	KINGS GRANT LN	0	0	0	29	20	0	6300	0	473	10	26	26	0	0	0	0	0	0
11	LONDONDERRY RD	0	20	0	17	0	3810	0	0	286	0	26	26	0	20	0	0	0	0
11	NORTHHAVEN DR	25	80	35	19	100	4290	0	0	321	0	39	39	0	80	20	10	25	15
11	POINDEXTER RD	0	0	0	12	0	0	2520	0	189	5	26	26	0	0	0	0	0	0
11	STONEHAVEN DR	225	50	0	67	450	0	0	14000	1120	25	65	65	2	50	0	0	225	0
11	STONYBROOK RD	25	30	120	18	150	4055	0	0	304	0	52	52	0	30	90	20	25	30
	Total	275	370	360	280	950	38340	8820	14000	4656	60	428	428	2	370	195	110	275	165




MAP 12

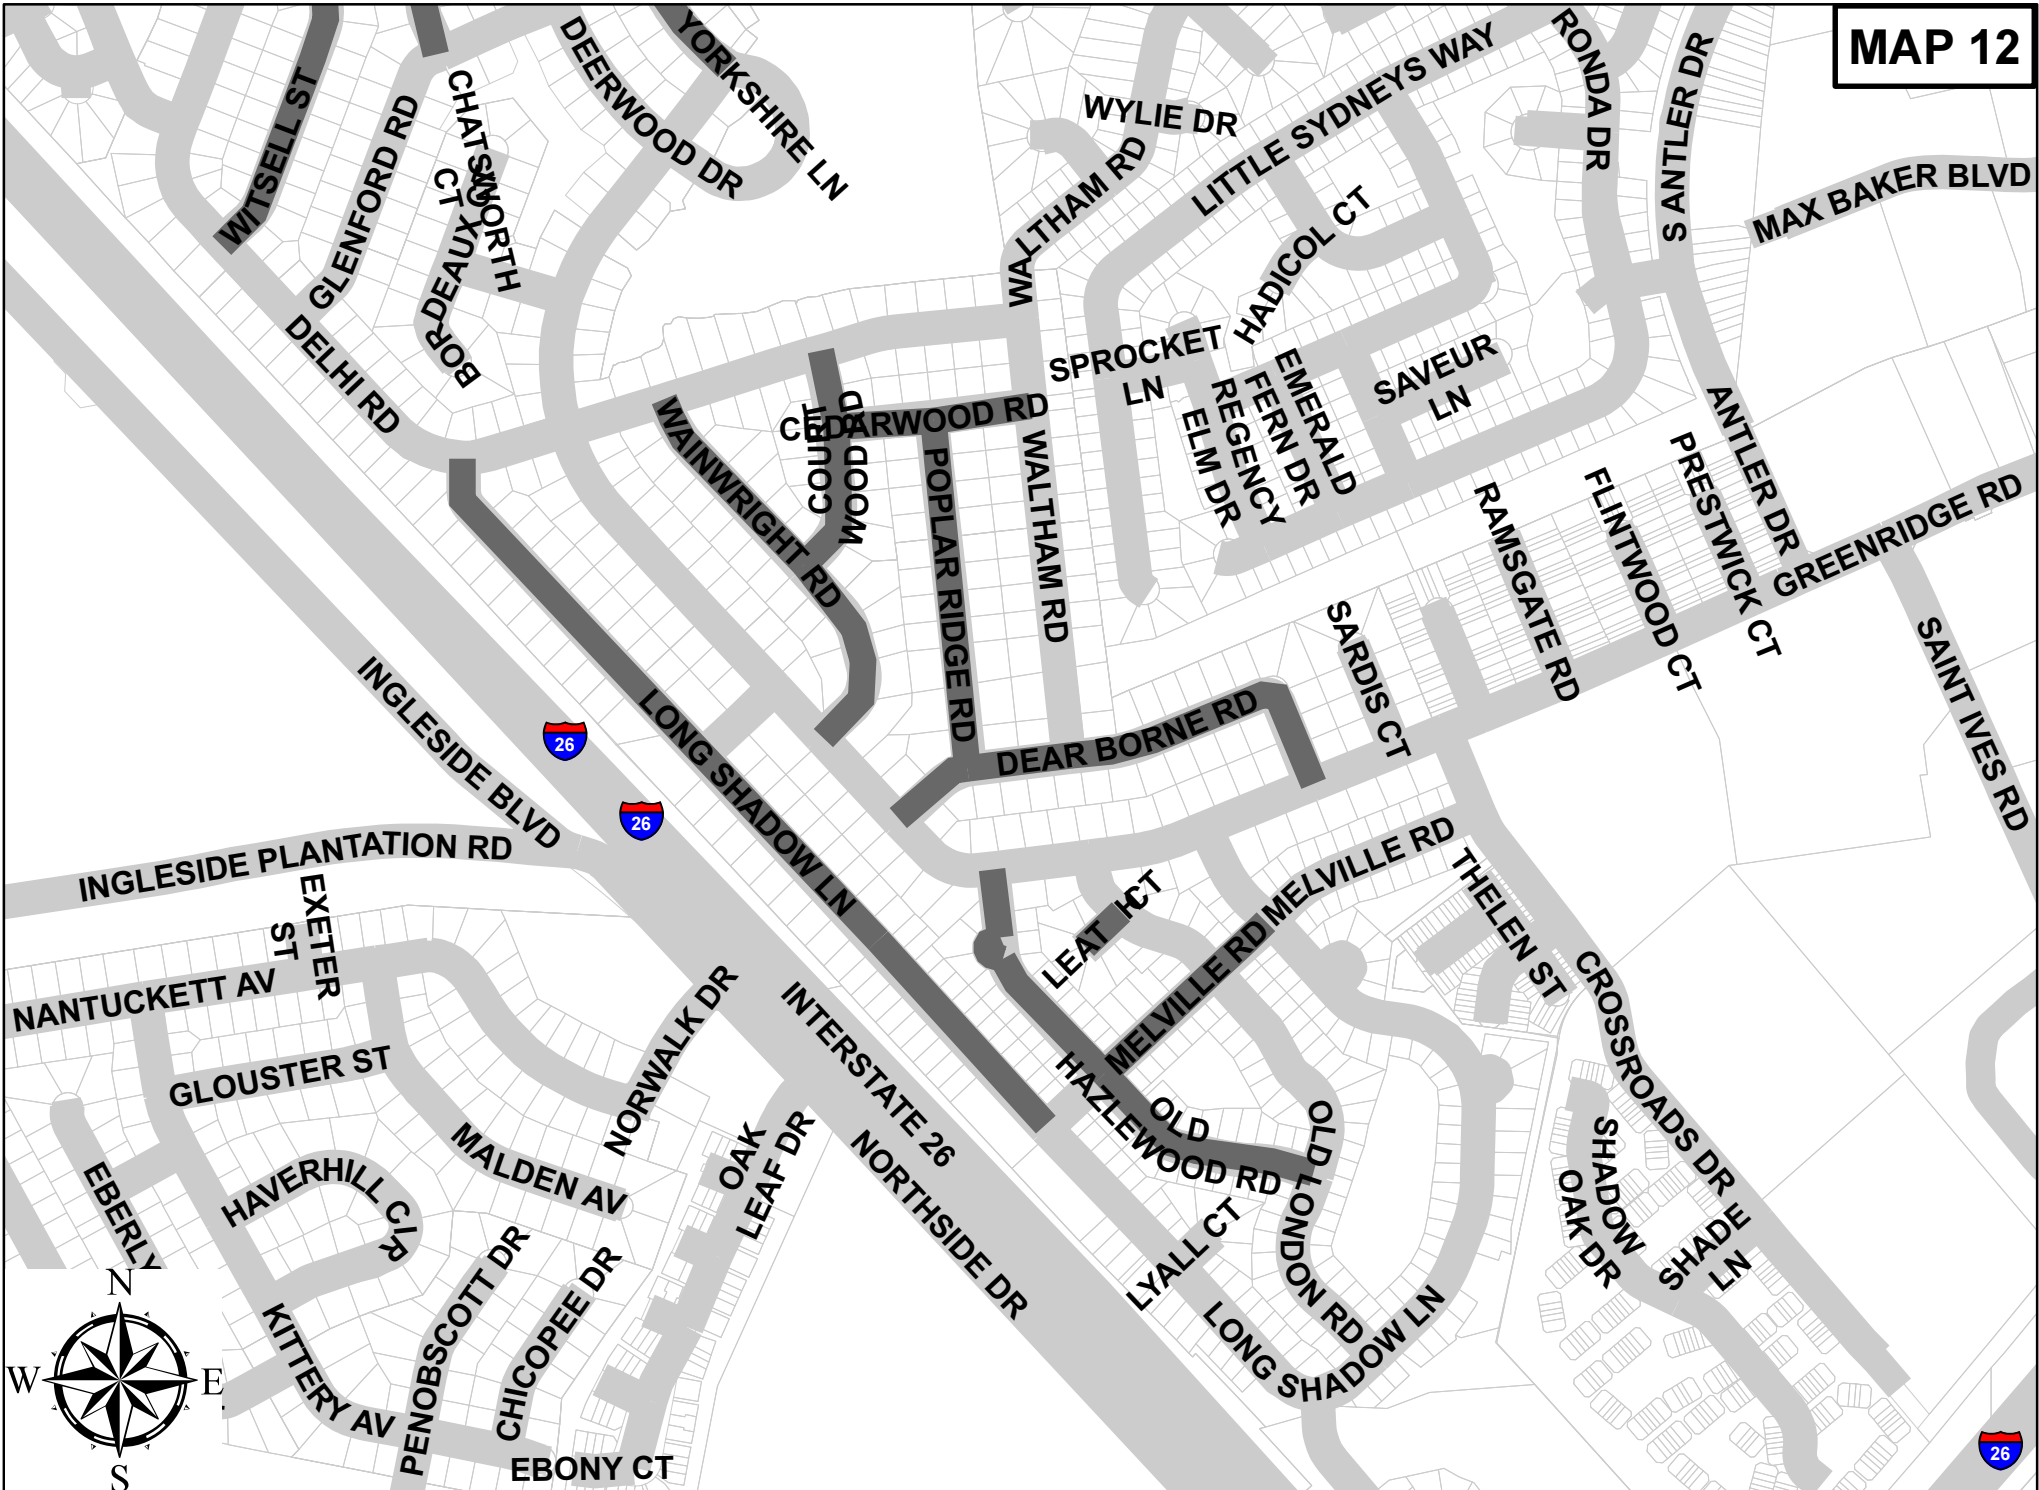



0 750 1,500 3,000 Feet



MapNumber	Route	2023000 REMOVAL & DISPOSAL OF EXISTING PAVEMENT (CONCRETE DRIVE	2024100 REMOVAL & DISPOSAL OF EXISTING CONCRETE GUTTER *	2027000 REMOVAL & DISPOSAL OF EXISTING CONCRETE SIDEWALK *	4011004 LIQUID ASPHALT BINDER PG 64-22	4012040 "FULL DEPTH ASPH_PAV_PATCHING 4" UNIFORM"	4013150 MILLING EXISTING ASPHALT PAVEMENT 1_5"	4113340 WARM MIX ASPHALT SURFACE COURSE TYPE C	4113340D WARM MIX ASPHALT SURFACE COURSE TYPE C FOR DRIVES & I	6241015 8" WHITE SOLID LINES PERM_PVMT_MARKINGS	6241025 24" WHITE SOLID LINES (STOP/DIAG LINES)- PERM_PVMT_MARKI	6250015 "8" WHITE SOLID LINES (CROSSWALK & CHANNELIZATION) FAS	6250025 "24" WHITE SOLID LINES (STOP/DIAGONAL LINES) - FAST DR	7197130 ADJUST DROP INLET	7203120 CONCRETE CURB AND GUTTER(1'-6") - SLOPING FACE	7204100 CONCRETE SIDEWALK (4-IN UNIFORM)*	7204900 DETECTABLE WARNING SURFACE (Cast in place where applica	7205000 "CONCRETE DRIVEWAY (6" UNIFORM)"	7209000 PEDESTRIAN RAMP CONSTRUCTION
12	CEDARWOOD RD	25	50	0	8	0	1850	139	0	0	26	0	26	1	50	0	0	25	0
12	COURT WOOD RD	0	100	0	10	65	2200	164	0	0	26	0	26	0	40	0	0	0	0
12	DEAR BORNE RD	0	110	0	22	60	4800	359	0	0	26	0	26	4	110	0	0	0	0
12	LEATH CT	0	20	0	3	0	555	42	0	0	13	0	13	0	20	0	0	0	0
12	LONG SHADOW LN	0	30	45	38	0	8550	640	5	80	0	80	0	0	30	0	30	0	45
12	MELVILLE RD	0	10	105	9	0	1950	146	0	0	50	0	50	0	10	0	70	0	105
12	OLD HAZLEWOOD RD	0	20	90	21	0	4600	344	0	65	50	65	50	0	20	15	50	0	75
12	POPLAR RIDGE RD	50	70	0	15	0	3405	255	0	0	26	0	26	2	70	0	0	50	0
12	WAINWRIGHT RD	0	30	0	18	0	4050	304	5	0	26	0	26	0	30	0	0	0	0
	Total	75	440	240	144	125	31960	2393	10	145	243	145	243	7	380	15	150	75	225

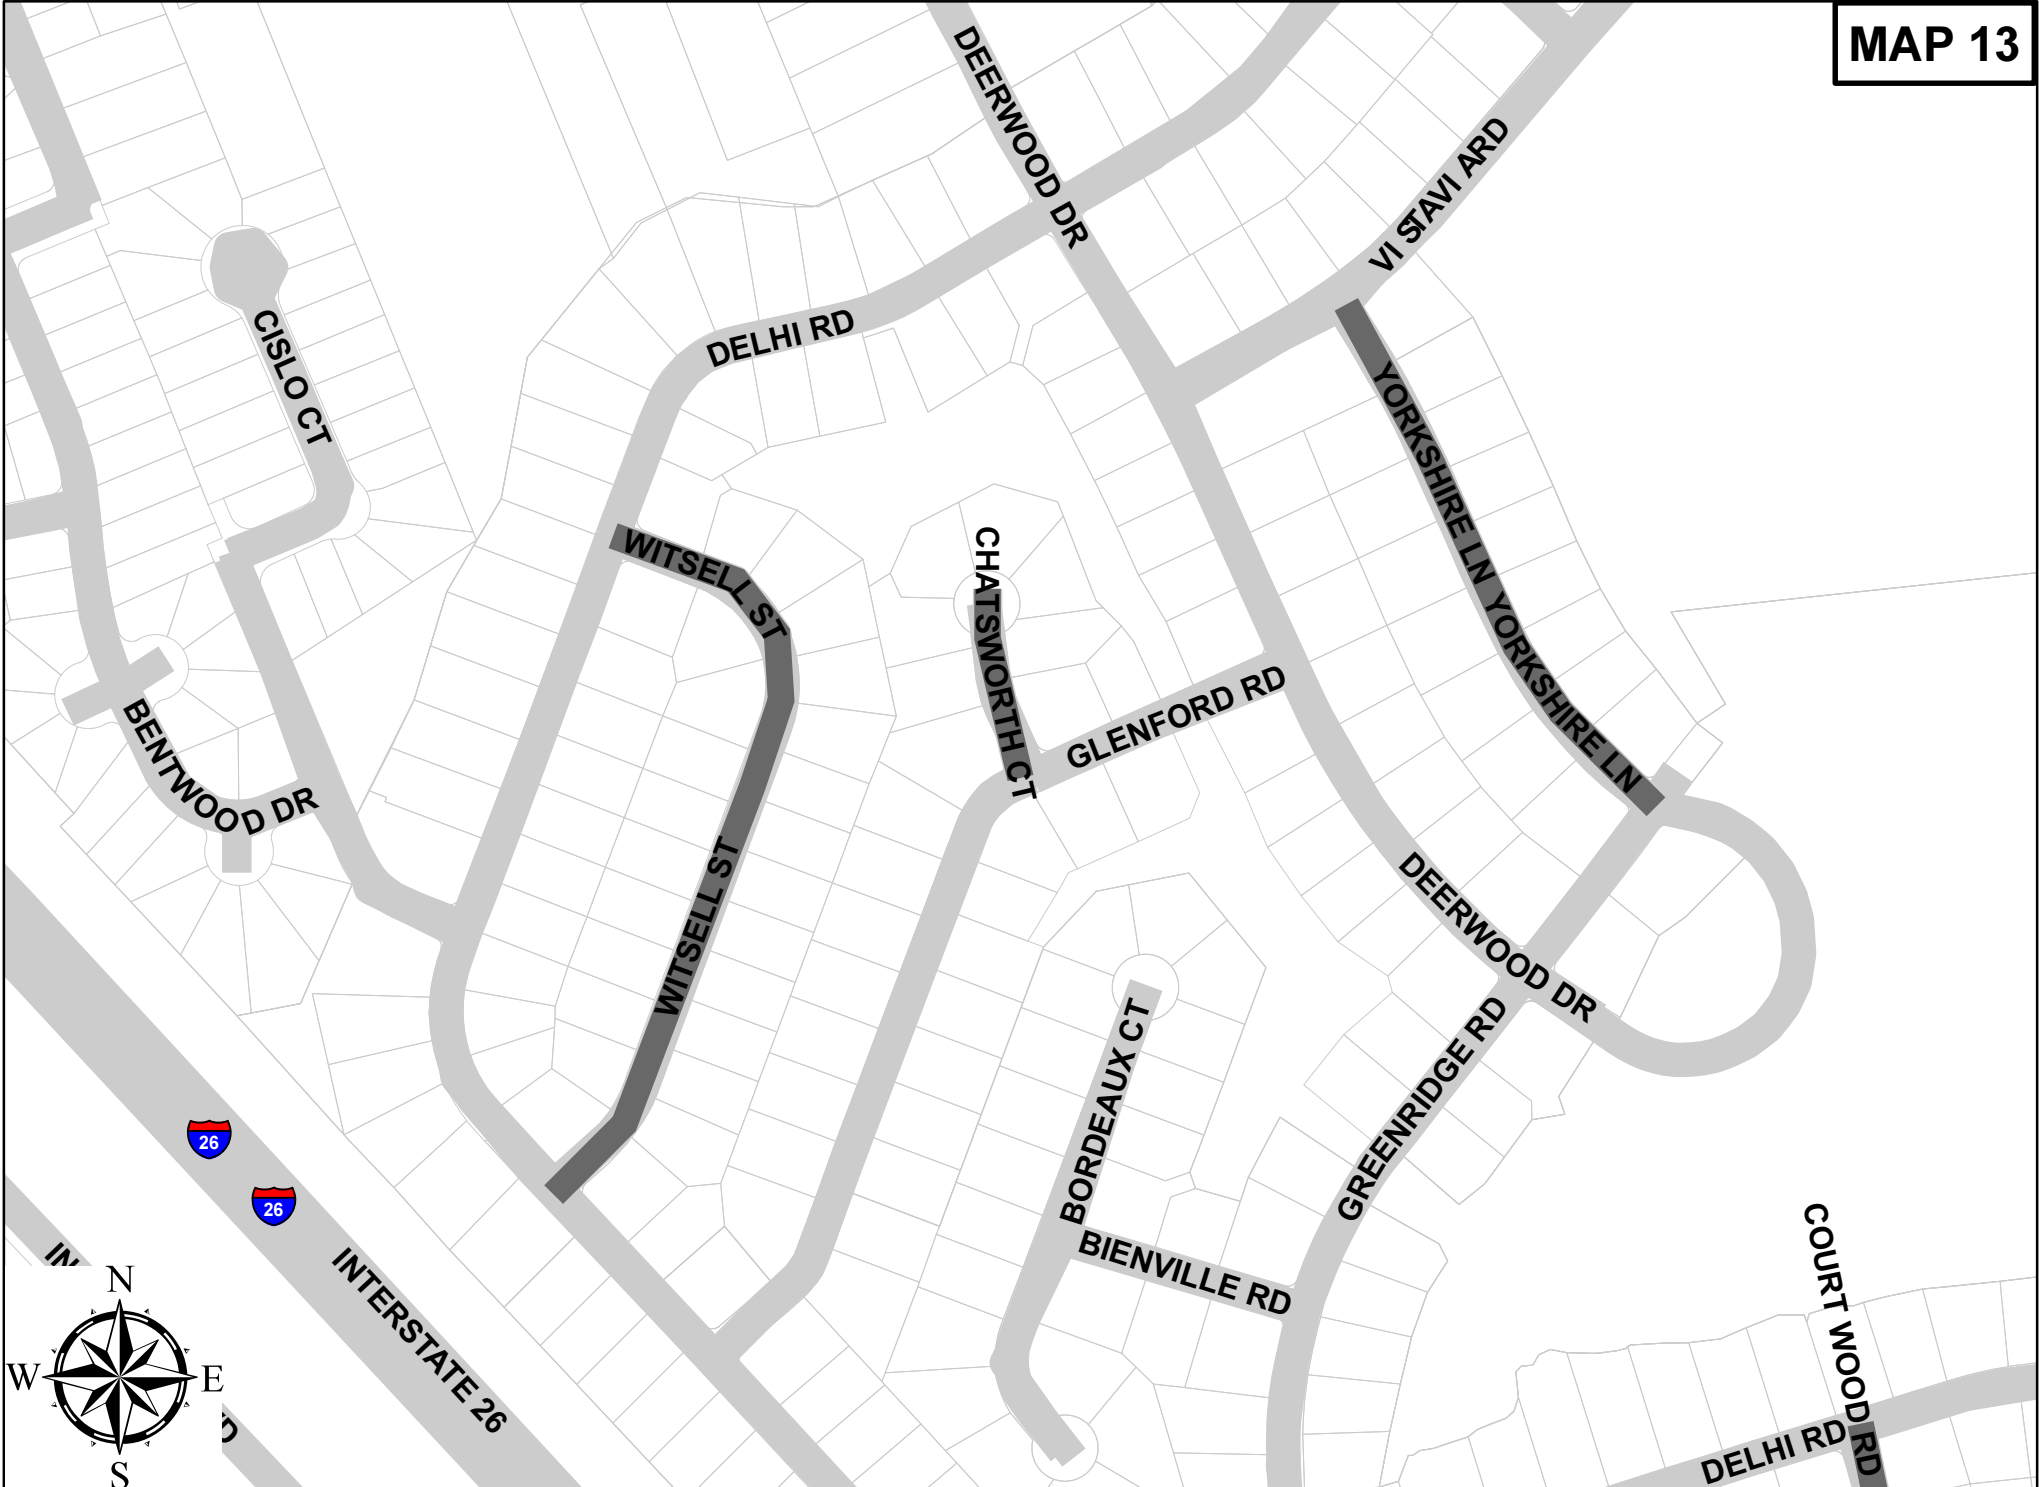

MapNumber	Route	2024100 REMOVAL & DISPOSAL OF EXISTING CONCRETE GUTTER *	4011004 LIQUID ASPHALT BINDER PG 64-22	4012040 "FULL DEPTH ASPH_PAV_PATCHING 4" UNIFORM"	4013150 MILLING EXISTING ASPHALT PAVEMENT 1_5"	4113340 WARM MIX ASPHALT SURFACE COURSE TYPE C	4113340D WARM MIX ASPHALT SURFACE COURSE TYPE C FOR DRIVES & I	6241025 24" WHITE SOLID LINES (STOP/DIAG LINES)- PERM_PVMT_MARKI	6250025 "24" WHITE SOLID LINES (STOP/DIAGONAL LINES) - FAST DR	7197130 ADJUST DROP INLET	7203120 CONCRETE CURB AND GUTTER(1'-6") - SLOPING FACE
13	CHATSWORTH CT	10	5	60	925	70	5	14	14	1	20
13	WITSELL ST	40	16	0	3565	267	0	30	30	0	40
13	YORKSHIRE LN	60	12	100	2700	195	0	26	26	0	60
	Total	110	33	160	7190	532	5	70	70	1	120

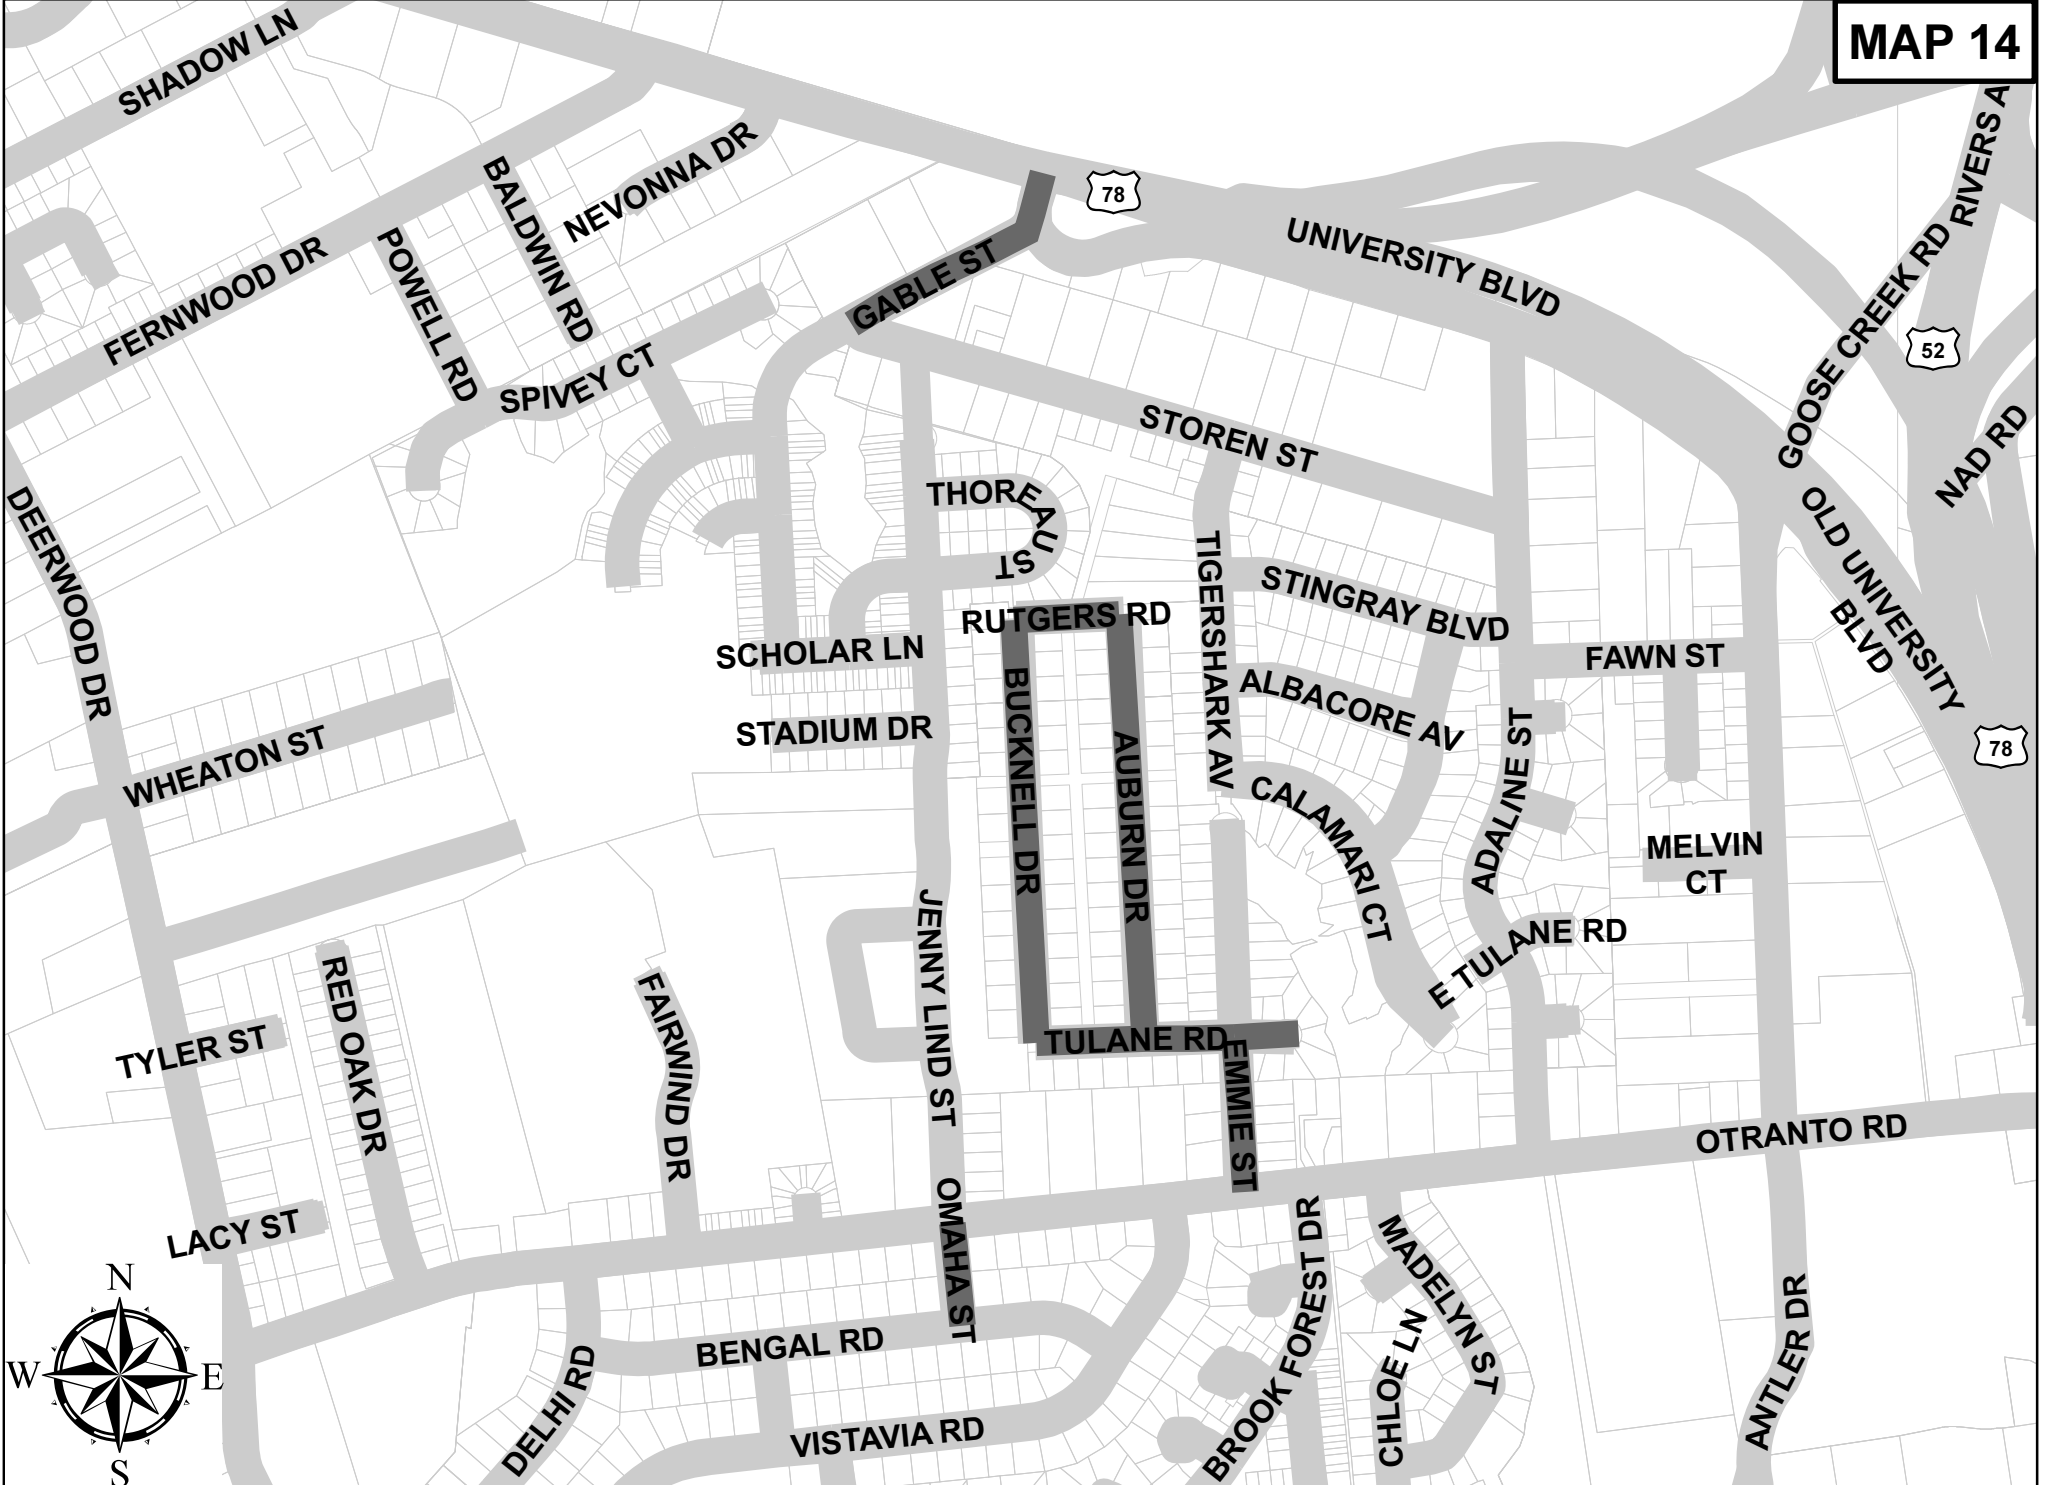

0 750 1,500 3,000 Feet

MapNumber	Route	2023000 REMOVAL & DISPOSAL OF EXISTING PAVEMENT (CONCRETE DRIVE	2024100 REMOVAL & DISPOSAL OF EXISTING CONCRETE GUTTER *	4011004 LIQUID ASPHALT BINDER PG 64-22	4012040 "FULL DEPTH ASPH_PAV_PATCHING 4" UNIFORM"	4012040D FULL DEPTH ASPH_PAV_PATCHING FOR DRIVES 4" UNIFORM	4013150 MILLING EXISTING ASPHALT PAVEMENT 1_5"	4013155 VARIABLE EDGE MILLING 1_5"	4113340 WARM MIX ASPHALT SURFACE COURSE TYPE C	4113340D WARM MIX ASPHALT SURFACE COURSE TYPE C FOR DRIVES & I	6241025 24" WHITE SOLID LINES (STOP/DIAG LINES) - PERM_PVMT_MARKI	6241074 4" YELLOW SOLID LINES(PVT_EDGE LINES) PERM_PVMT_MARKING	6250025 "24" WHITE SOLID LINES (STOP/DIAGONAL LINES) - FAST DR	6250110 "4" YELLOW SOLID LINE (PVT_EDGE & NO PASSING) - F	7205000 "CONCRETE DRIVEWAY (6" UNIFORM)"
14	AUBURN DR	50	0	14	0	10	3060	0	230	6	10	0	10	0	50
14	BUCKNELL DR	75	0	14	0	20	3050	0	229	0	0	0	0	0	0
14	EMMIE ST	0	0	5	0	0	0	440	84	0	10	0	10	0	0
14	GABLE ST	0	0	8	425	5	0	0	133	8	12	1295	12	1295	0
14	OMAHA ST	0	60	4	65	0	970	0	72	0	26	0	26	0	0
14	RUTGERS RD	0	0	3	0	0	720	35	54	0	0	0	0	0	0
14	TULANE RD	75	0	9	0	0	2000	0	151	0	22	0	22	0	75
	Total	200	60	57	490	35	9800	475	953	14	80	1295	80	1295	125



MapNumber	Route	2027000 REMOVAL & DISPOSAL OF EXISTING CONCRETE SIDEWALK *	4011004 LIQUID ASPHALT BINDER PG 64-22	4012040 "FULL DEPTH ASPH_PAV_PATCHING 4" UNIFORM"	4013150 MILLING EXISTING ASPHALT PAVEMENT 1_5"	4013155 VARIABLE EDGE MILLING 1_5"	4113340 WARM MIX ASPHALT SURFACE COURSE TYPE C	4113340D WARM MIX ASPHALT SURFACE COURSE TYPE C FOR DRIVES & I	6241015 8" WHITE SOLID LINES PERM_PVMT_MARKINGS	6241025 24" WHITE SOLID LINES (STOP/DIAG LINES)- PERM_PVMT_MARKI	6250015 "8" WHITE SOLID LINES (CROSSWALK & CHANNELIZATION) FAS	6250025 "24" WHITE SOLID LINES (STOP/DIAGONAL LINES) - FAST DR	7204100 CONCRETE SIDEWALK (4-IN UNIFORM)*
15	BELLE HALL PKWY	15	19	40	4250	25	318	0	52	0	52	0	15
15	PALMETTO BATTERY WAY	0	8	0	1750	0	130	5	0	26	0	26	0
	Total	15	27	40	6000	25	448	5	52	26	52	26	15

