


# COUNTY OF CHARLESTON



## **CTC 2022 RESURFACING PLAN** July 01, 2022

# TABLE OF CONTENTS

<u>DESCRIPTION</u>	<u>SHEET NO.</u>
COVER SHEET.....	1
TABLE OF CONTENTS.....	2
PLAN MAP.....	3
PLAN SHEET.....	4
ROAD LIST BY LOCATION .....	5
WORK ITEM SUMMARY.....	6-7
MANHOLE LIST.....	8
CONSTRUCTION NOTES .....	9
STRIP MAPS.....	10 - 25

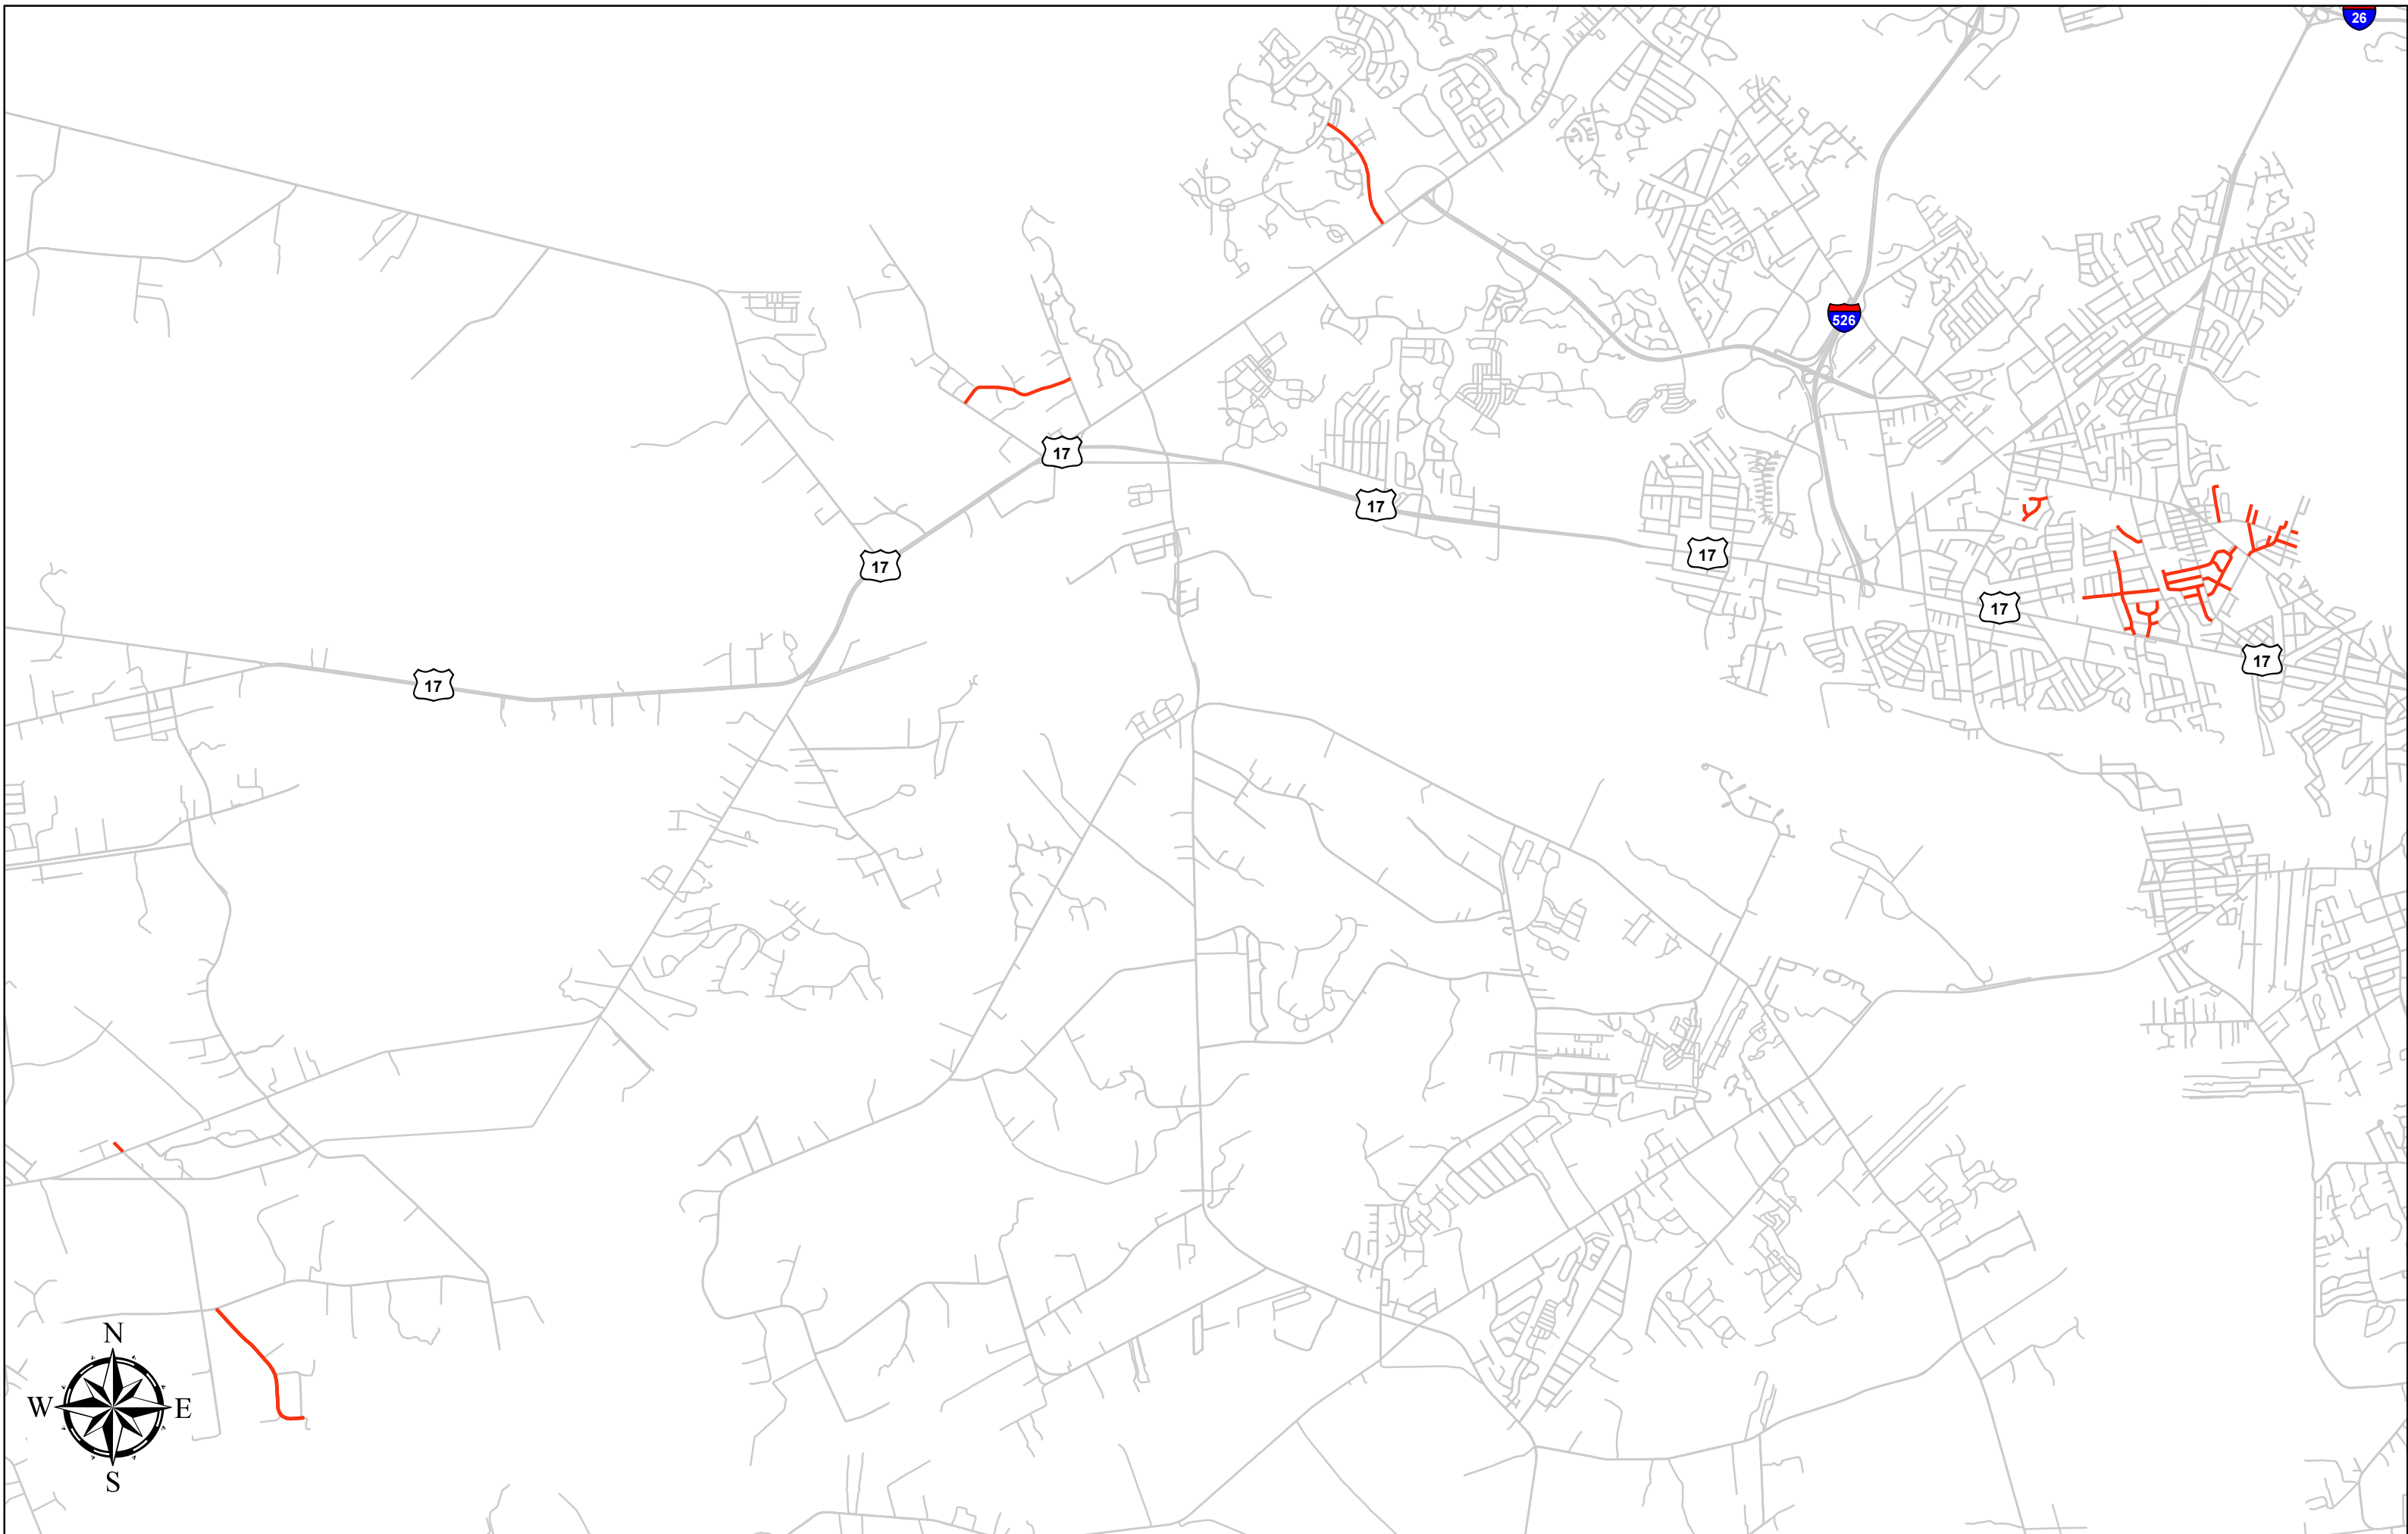



# Road List By Area

<u>Map#</u>	<u>Street Name</u>	<u>State Route Number</u>	<u>County District</u>
<u>Ravenel Hollywood</u>			
1	GIBSON RD		8
1	WESTERVELT RD	1960	8
<u>West Ashley</u>			
5	ALLEGHENY ST	1565	6
6	ANITA DR		6
6	BARRETT RD		6
7	BATTERY AV	1977	6
7	BROOKFIELD ST		6
6	BROWNING DR		6
6	BYRON RD		6
7	CHANNING ST	941	6
7	CHICKADEE AV		6
6	EMILY DR		6
5	FALKIRK DR		6
7	FIALI ST		6
3	GRANDE OAKS BLVD		6
2	GREENLAND RD	1947	6
7	HIGH ST		6
6	JERRY DR		6
6	KIPLING RD		6
5	KRUGER AV		6
6	LONGFELLOW RD		6
7	MAMIE ST		6
4	PALMETTO PARK DR		6
6	PAULA DR		6
5	S SHERWOOD DR	2332/Local	6
8	SAN JUAN AV		6
7	SYCAMORE AV	81	6
4	TIMBERLEAF CT		6
5	WANTOOT BLVD	937	6
5	WATEREE DR	1124/Local	6
5	WIMBEE DR	716	6
4	WOODLEAF CT		6

# Quantity Sheet

<u>SCDOT Spec</u>	<u>Description</u>	<u>Quantity</u>	<u>Unit</u>
1071000	TRAFFIC CONTROL	1	LS
2023000	REMOVAL & DISPOSAL OF EXISTING PAVEMENT (CONCRETE DRIVEWAY AS DIRECTED) *	1770	SY
2024100	REMOVAL & DISPOSAL OF EXISTING CONCRETE GUTTER *	90	LF
2027000	REMOVAL & DISPOSAL OF EXISTING CONCRETE SIDEWALK *	50	SY
2033000	BORROW EXCAVATION (FOR SHOULDERS) *	668	CY
3050199	GRADED AGGREGATE BASE COURSE	20	TONS
3069900	MAINTENANCE STONE*	20	TONS
4011004	LIQUID ASPHALT BINDER PG 64-22	581.2	TONS
4012040	"FULL DEPTH ASPH. PAV. PATCHING 4"" UNIFORM"	7239.2	SY
4012040D	FULL DEPTH ASPH. PAV. PATCHING FOR DRIVES 4" UNIFORM	1386	SY
4013150	MILLING EXISTING ASPHALT PAVEMENT 1.5"	21646.7	SY
4013155	VARIABLE EDGE MILLING 1.5"	427.325	SY
4013200	"MILLING EXISTING ASPHALT PAVEMENT 2""	12628	SY
4013990	"VARIABLE MILLING EXISTING ASPHALT PAVEMENT FOR KEY-INS	1867	SY
4030340D	HOT MIX ASPH. CONC. SURF. CR. TYPE C FOR DRIVES	1545.3	TONS
4030360B	HOT MIX ASPH. CONC. SURF. CR. TYPE E (BACKSLOPES	90	TONS
4113340	WARM MIX ASPHALT SURFACE COURSE TYPE C	9004.15	TON
6241005	4" WHITE BROKEN LINES(GAPS EXCL.)PERM.PVMT.MARKING	10	LF
6241010	4" WHITE SOLID LINES (PVT. EDGE LINES) PERM.PVMT.MARKING	10310	LF
6241015	8" WHITE SOLID LINES PERM.PVMT.MARKINGS	753	LF
6241020	12" WHITE SOLID LINES - PERM.PVMT.MARKINGS	360	LF
6241023	12IN X 18IN WHITE TRIANG. YIELD BAR (GAPS EXC)PERM.PVMT.MARK	11	LF
6241023A	48IN X 48 IN WHITE YIELD TRIANGLE – PERM.PVMT.MARKING	109	EA
6241025	24" WHITE SOLID LINES (STOP/DIAG LINES)-PERM.PVMT.MARKING	1216	LF
6241030	WHITE SINGLE ARROWS (LT, STRGHT, RT) PERM.PVMT.MARKING	3	EA
6241035	WHITE WORD MESSAGE - ONLY, SLOW, STOP -PERM.PVMT.MARKING	1	EA
6241040	WHITE COMBINATION ARROWS(STR&RT.OR STR&LT)PERM.PVMT.MARKING	1	EA
6241064	4" YELLOW BROKEN LINES(GAPS EXC)PERM.PVMT.MARKING	2430	LF
6241074	4" YELLOW SOLID LINES(PVT.EDGE LINES) PERM.PVMT.MARKING	23980	LF
6241080	24" YELLOW SOLID LINES - PERM.PVMT.MARKING	65	LF
6250005	"4"" WHITE BROKEN LINES -(GAPS EXCLUDED) - FAST DRY PAINT*"	10	LF
6250010	"4"" WHITE SOLID LINES (PVT. EDGE LINES) - FAST DRY PAINT"	10320	LF
6250015	"8"" WHITE SOLID LINES (CROSSWALK & CHANNELIZATION) FAST DRY PAINT *"	953	LF
6250020	12" WHITE SOLID LINES - FAST DRY PAINT	360	LF
6250025	"24"" WHITE SOLID LINES (STOP/DIAGONAL LINES) - FAST DRY PAINT"	1216	LF
6250030	"WHITE SINGLE ARROW (LEFT, STRAIGHT, RIGHT) - FAST DRY	3	EA
6250035	"WHITE WORD MESSAGE - ONLY, SLOW, STOP - FAST DRY PAINT	1	EA
6250040	WHITE COMBINATION ARROW (STR. & RT. OR STR. & LT.) - FAST DRY PAINT	1	EA
6250105	"4"" YELLOW BROKEN LINES -(GAPS EXCLUDED) - FAST DRY PAINT"	10	LF
6250110	"4"" YELLOW SOLID LINE (PVT. EDGE & NO PASSING) - FAST DRY PAINT"	26390	LF
6250112	"6"" YELLOW SOLID LINE ON CURB/MEDIAN - FAST DRY PAINT*"	300	LF
6250115	24" YELLOW SOLID DIAGONAL LINES - FAST DRY PAINT	65	LF
6251023	48IN X 48 IN WHITE YIELD TRIANGLE FAST DRY	113	EA
6251023A	12IN X 18IN WHITE TRIANG. YIELD BAR (GAPS EXC) FAST DRY PAINT*	15	EA
6300005	"PERMANENT CLEAR PAVEMENT MARKERS - MONO-DIR. - 4""x4"" *"	254	EA
6301005	"PERMANENT YELLOW PAVEMENT MARKER MONO- DIR. - 4""x4""	6	EA
6301100	"PERMANENT YELLOW PAVEMENT MARKER BI- DIR. - 4""x4""	393	EA
675XXXX	TRAFFIC LIGHT TIMING LOOPS- MOTORCYCLE SENSITIVE (COMPLETE)	2	EA
7141112	15" RC PIPE CULVERT - CLASS III (IN PLACE)*	24	LF
7197110	ADJUST CATCH BASIN (REPAIR C.B. TYPE 1 )	2	EA

\* THESE QUANTITIES ARE NOT SHOWN IN DETAIL BUT ARE INCLUDED TO BE USED AS DIRECTED BY THE ENGINEER

<u>SCDOT Spec</u>	<u>Description</u>	<u>Quantity</u>	<u>Unit</u>
7197130	ADJUST DROP INLET	5	EA
7203210	CONCRETE CURB AND GUTTER 2'0"	90	LF
7204100	CONCRETE SIDEWALK (4-IN UNIFORM)*	50	SY
7204900	DETECTABLE WARNING SURFACE (Cast in place where applicable)	140	SF
7205000	"CONCRETE DRIVEWAY (6" UNIFORM)"	1750	SY
7209000	PEDESTRIAN RAMP CONTRUCTION	70	SY
8100001	PERMANENT VEGETATION	10	MSY
8152004	INLET STRUCTURE FILTER - TYPE F (WEIGHTED)*	50	LF
8152007	SEDIMENT TUBE*	50	LF
8153000	SILT FENCE*	200	LF

\* THESE QUANTITIES ARE NOT SHOWN IN DETAIL BUT ARE INCLUDED TO BE USED AS DIRECTED BY THE ENGINEER

# Manhole Report

Map Number	Route	Manhole	Lower	Raise	Valve	Lower	Raise
4	PALMETTO PARK DR	4		4	1		1
5	FALKIRK DR	1		1	1		1
5	S SHERWOOD DR	1		1			
5	WANTOOT BLVD	1		1			
5	WATEREE DR	1		1	1		1
5	WIMBEE DR	1		1			
5	WIMBEE DR	2		2			
6	ANITA DR	3		3			
6	BARRETT RD	1		1			
6	BROWNING DR	1		1			
6	BYRON RD	1		1			
6	EMILY DR	2		2			
6	JERRY DR	3		3			
6	KIPLING RD	1		1			
6	LONGFELLOW RD	1		1			
6	PAULA DR	3		3			
7	BATTERY AV	1		1	1		1
7	BATTERY AV	2		2			
7	BROOKFIELD ST	1		1			
7	CHANNING ST	1		1			
7	CHICKADEE AV	1		1			
7	FIALL ST	2		2			
7	HIGH ST	1		1			
7	MAMIE ST	2		2			
7	SYCAMORE AV	6		6	1		1
8	SAN JUAN AV	1		1			

1. Figures are representative estimates alerting to potential issues, exact quantities to be confirmed in field by contractor.
2. The Contractor must coordinate with the Utility Company to determine the best practice for correcting conditions in the field. The Charleston County Utility Coordinator will assist the Contractor with the coordination.
3. Roadway Milling was taken into consideration when this table was developed. However, this is an estimate and the Contractor must complete their own assessment of the manholes and valves to determine the amount of adjustment necessary to ensure a smooth ride.



## Construction Notes




1. All roads to be replaced with 150 lbs/sy of surface course unless otherwise directed by the County or called out in the plans.
2. All speed humps shall be keyed-in to maintain speed humps within height specifications and maintain smooth transition.
3. Per the scope of work, payments will be paid as each road is substantially completed. Substantially complete shall generally be defined as all items being complete with the exception of permanent pavement markings and permanent vegetation. No payment shall be made for items completed on roads that are not substantially complete by the end of the invoice period.






MapNumber	Route	2033000 BORROW EXCAVATION (FOR SHOULDERS) *	4011004 LIQUID ASPHALT BINDER PG 64-22	4012040 "FULL DEPTH ASPH_ PAV_ PATCHING 4"" UNIFORM"	4012040D FULL DEPTH ASPH_ PAV_ PATCHING FOR DRIVES 4" UNIFORM	4013990 "VARIABLE MILLING EXISTING ASPHALT PAVEMENT FOR KEY-INS	4030340D HOT MIX ASPH_ CONC_ SURF_ CR_ TYPE C FOR DRIVES	4113340 WARM MIX ASPHALT SURFACE COURSE TYPE C	6241010 4" WHITE SOLID LINES (PVT_ EDGE LINES) PERM_ PVMT_ MARKIN	6241025 24" WHITE SOLID LINES (STOP/DIAG LINES)-PERM_ PVMT_ MARKI	6241074 4" YELLOW SOLID LINES(PVT_ EDGE LINES) PERM_ PVMT_ MARKING	6250010 "4"" WHITE SOLID LINES (PVT_ EDGE LINES) - FAST DRY PAI	6250025 "24"" WHITE SOLID LINES (STOP/DIAGONAL LINES) - FAST DR	6250110 "4"" YELLOW SOLID LINE (PVT_ EDGE & NO PASSING) - F	6301100 "PERMANENT YELLOW PAVEMENT MARKER BI- DIR_ - 4""
1	GIBSON RD	52	10	200	20	53	12	120	0	32	644	0	32	644	0
1	WESTERVELT RD	0	62	900	85	69	30	1000	10300	14	10300	10300	14	10300	65
	<b>Total</b>	<b>52</b>	<b>72</b>	<b>1100</b>	<b>105</b>	<b>122</b>	<b>42</b>	<b>1120</b>	<b>10300</b>	<b>46</b>	<b>10944</b>	<b>10300</b>	<b>46</b>	<b>10944</b>	<b>65</b>

**Contractor shall pull shoulders to re-establish full pavement width of 20'.  
New pavement shall have 9' travel lanes with 1' paved shoulder.**

**MAP 2**

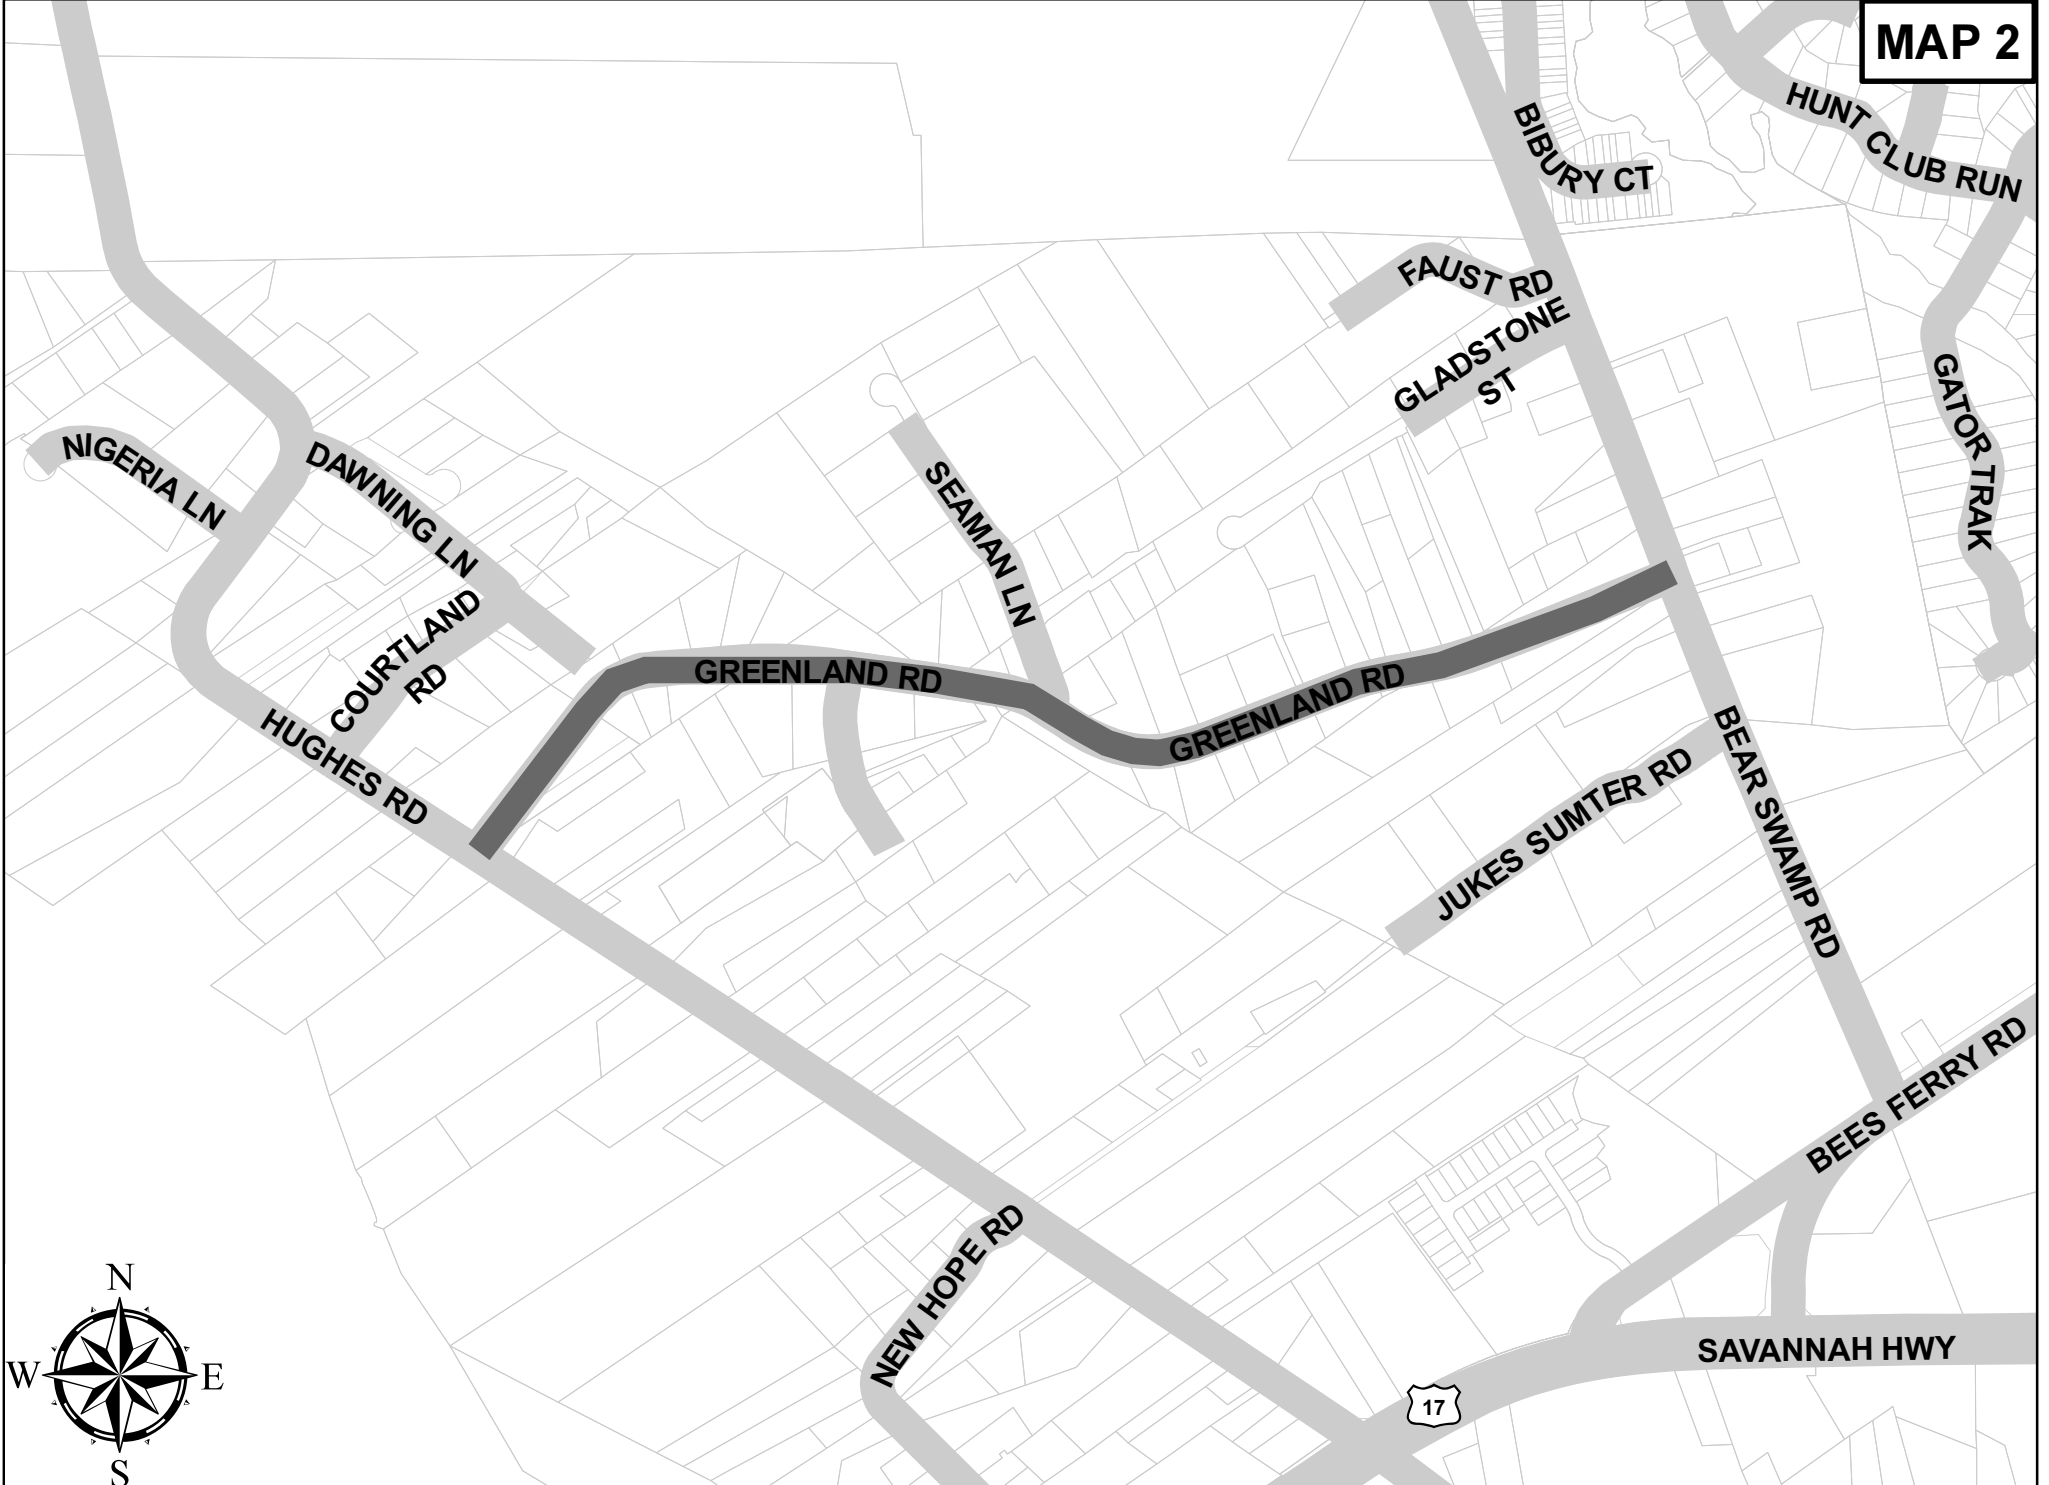



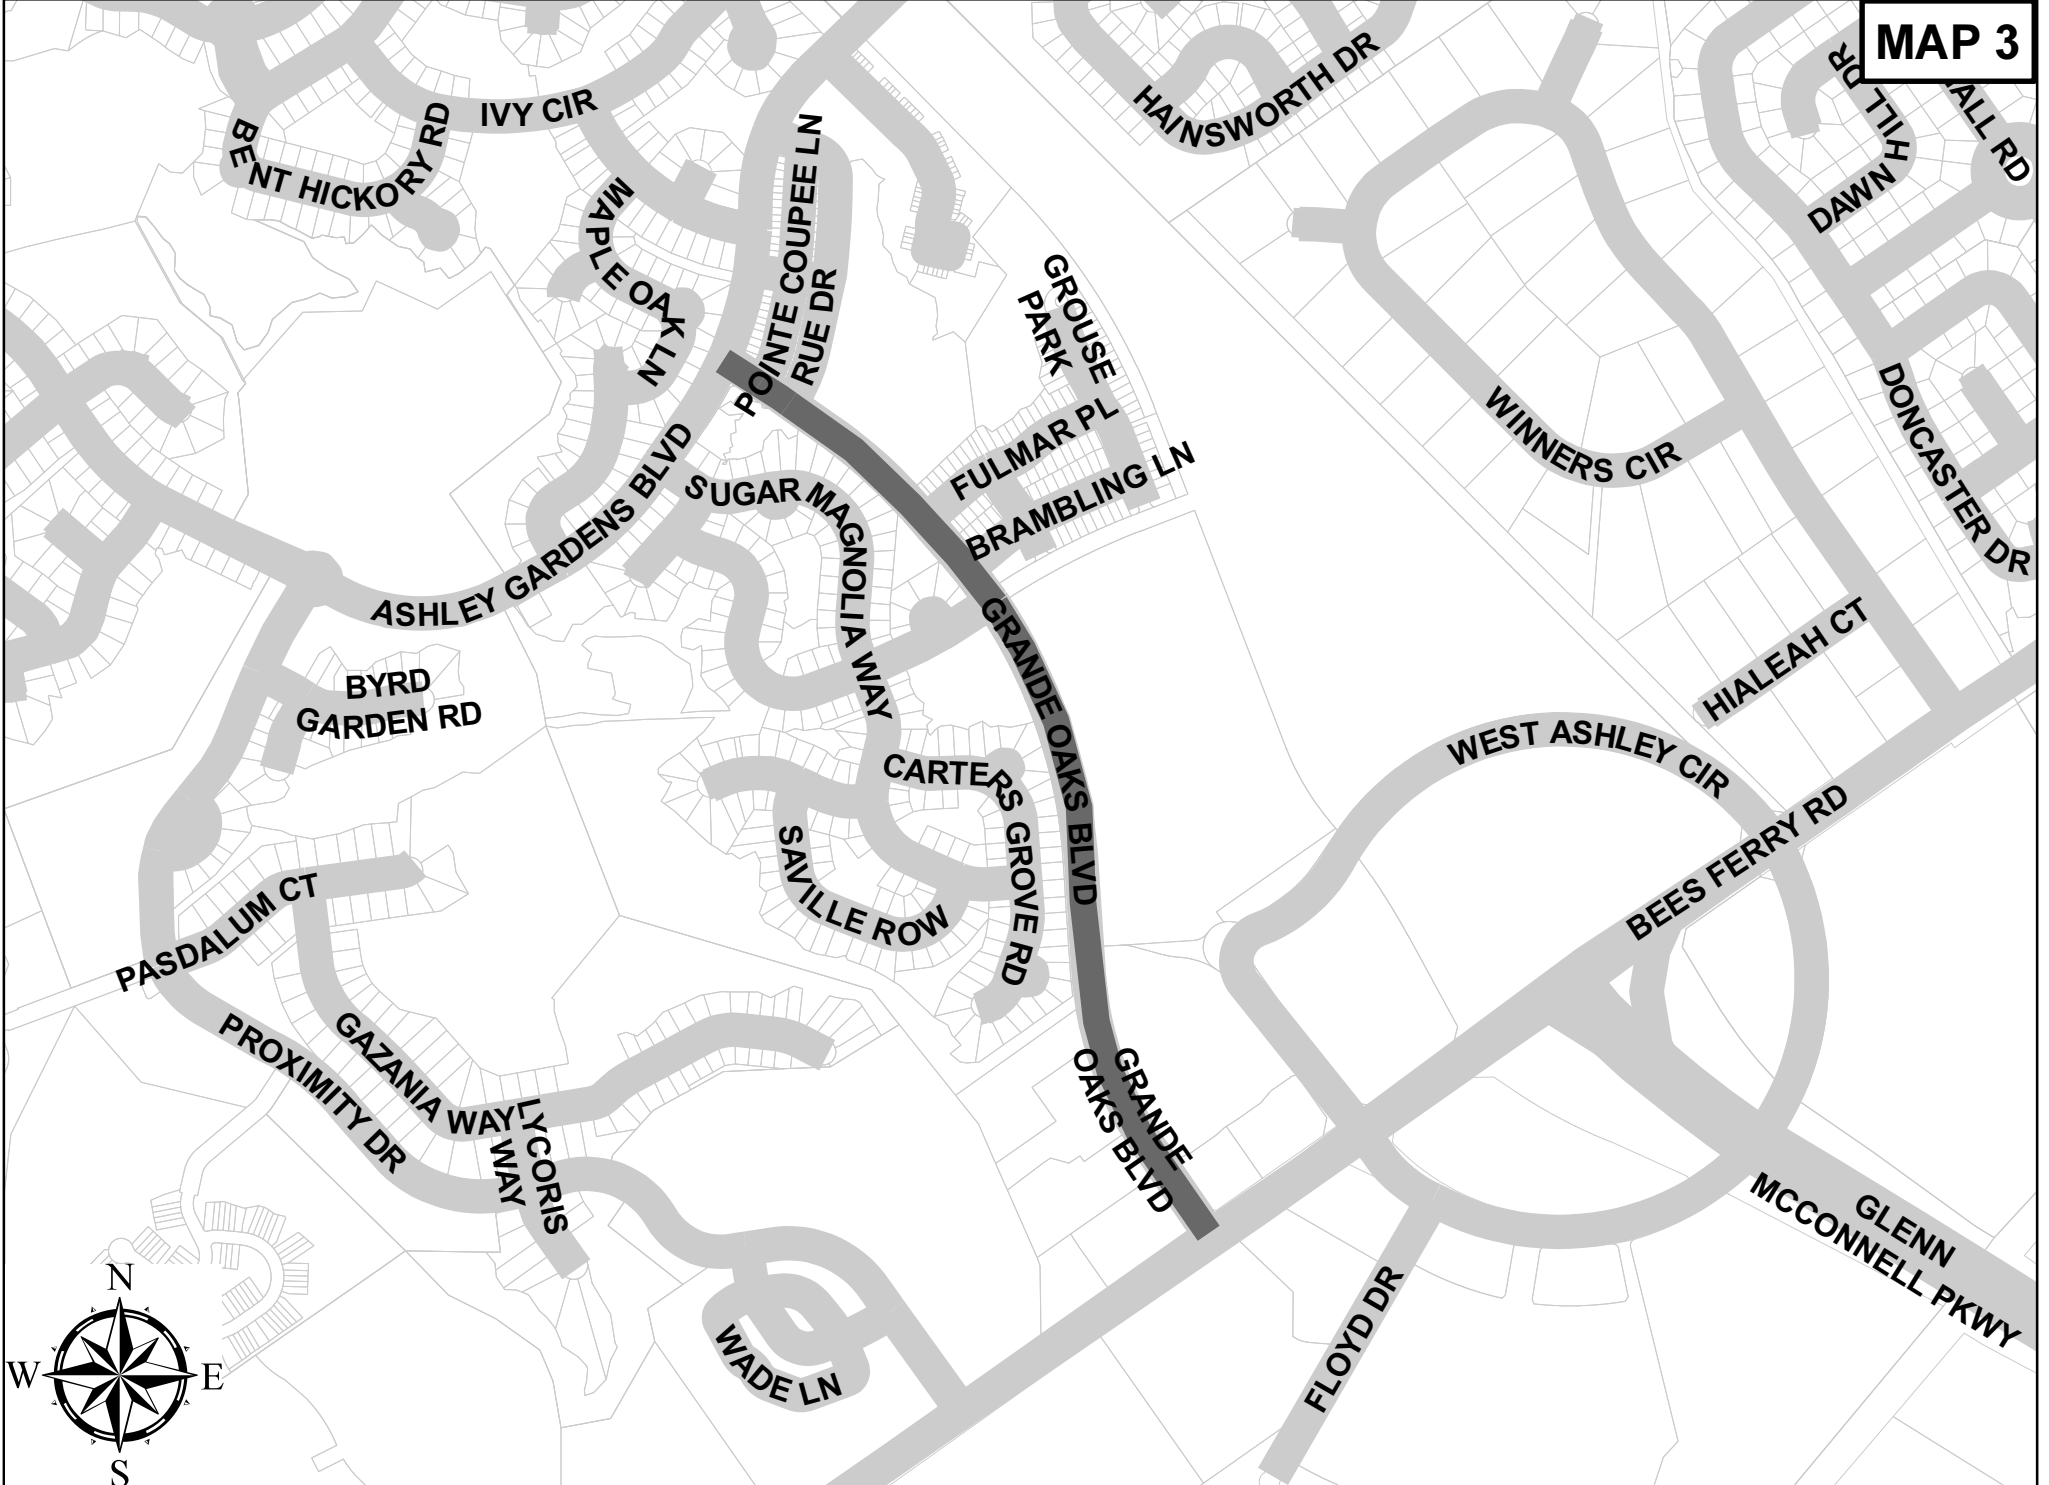










MapNumber	Route	2024100 REMOVAL & DISPOSAL OF EXISTING CONCRETE GUTTER *	4011004 LIQUID ASPHALT BINDER PG 64-22	4012040 "FULL DEPTH ASPH_ PAV_ PATCHING 4"" UNIFORM"	4013150 MILLING EXISTING ASPHALT PAVEMENT 1_5"	4013990 "VARIABLE MILLING EXISTING ASPHALT PAVEMENT FOR KEY-INS	4030340D HOT MIX ASPH_ CONC_ SURF_ CR_ TYPE C FOR DRIVES	4113340 WARM MIX ASPHALT SURFACE COURSE TYPE C	6241025 24" WHITE SOLID LINES (STOP/DIAG LINES)-PERM_PVMT_MARKI	6250025 "24"" WHITE SOLID LINES (STOP/DIAGONAL LINES) - FAST DR	6250112 "6"" YELLOW SOLID LINE ON CURB/MEDIAN - FAST DRY PAINT*	7203210 CONCRETE CURB AND GUTTER 2'0"	7204900 DETECTABLE WARNING SURFACE (Cast in place where applica	7209000 PEDESTRIAN RAMP CONTRUCTION
4	PALMETTO PARK DR	0	12	85	2700	175	0	187	37	37	300	0	40	40
4	TIMBERLEAF CT	0	6	110	1210	392	0	100	10	10	0	0	20	20
4	WOODLEAF CT	40	11	65	2400	0	5	178	20	20	0	40	0	0
	<b>Total</b>	<b>40</b>	<b>29</b>	<b>260</b>	<b>6310</b>	<b>567</b>	<b>5</b>	<b>465</b>	<b>67</b>	<b>67</b>	<b>300</b>	<b>40</b>	<b>60</b>	<b>60</b>

**MAP 5**

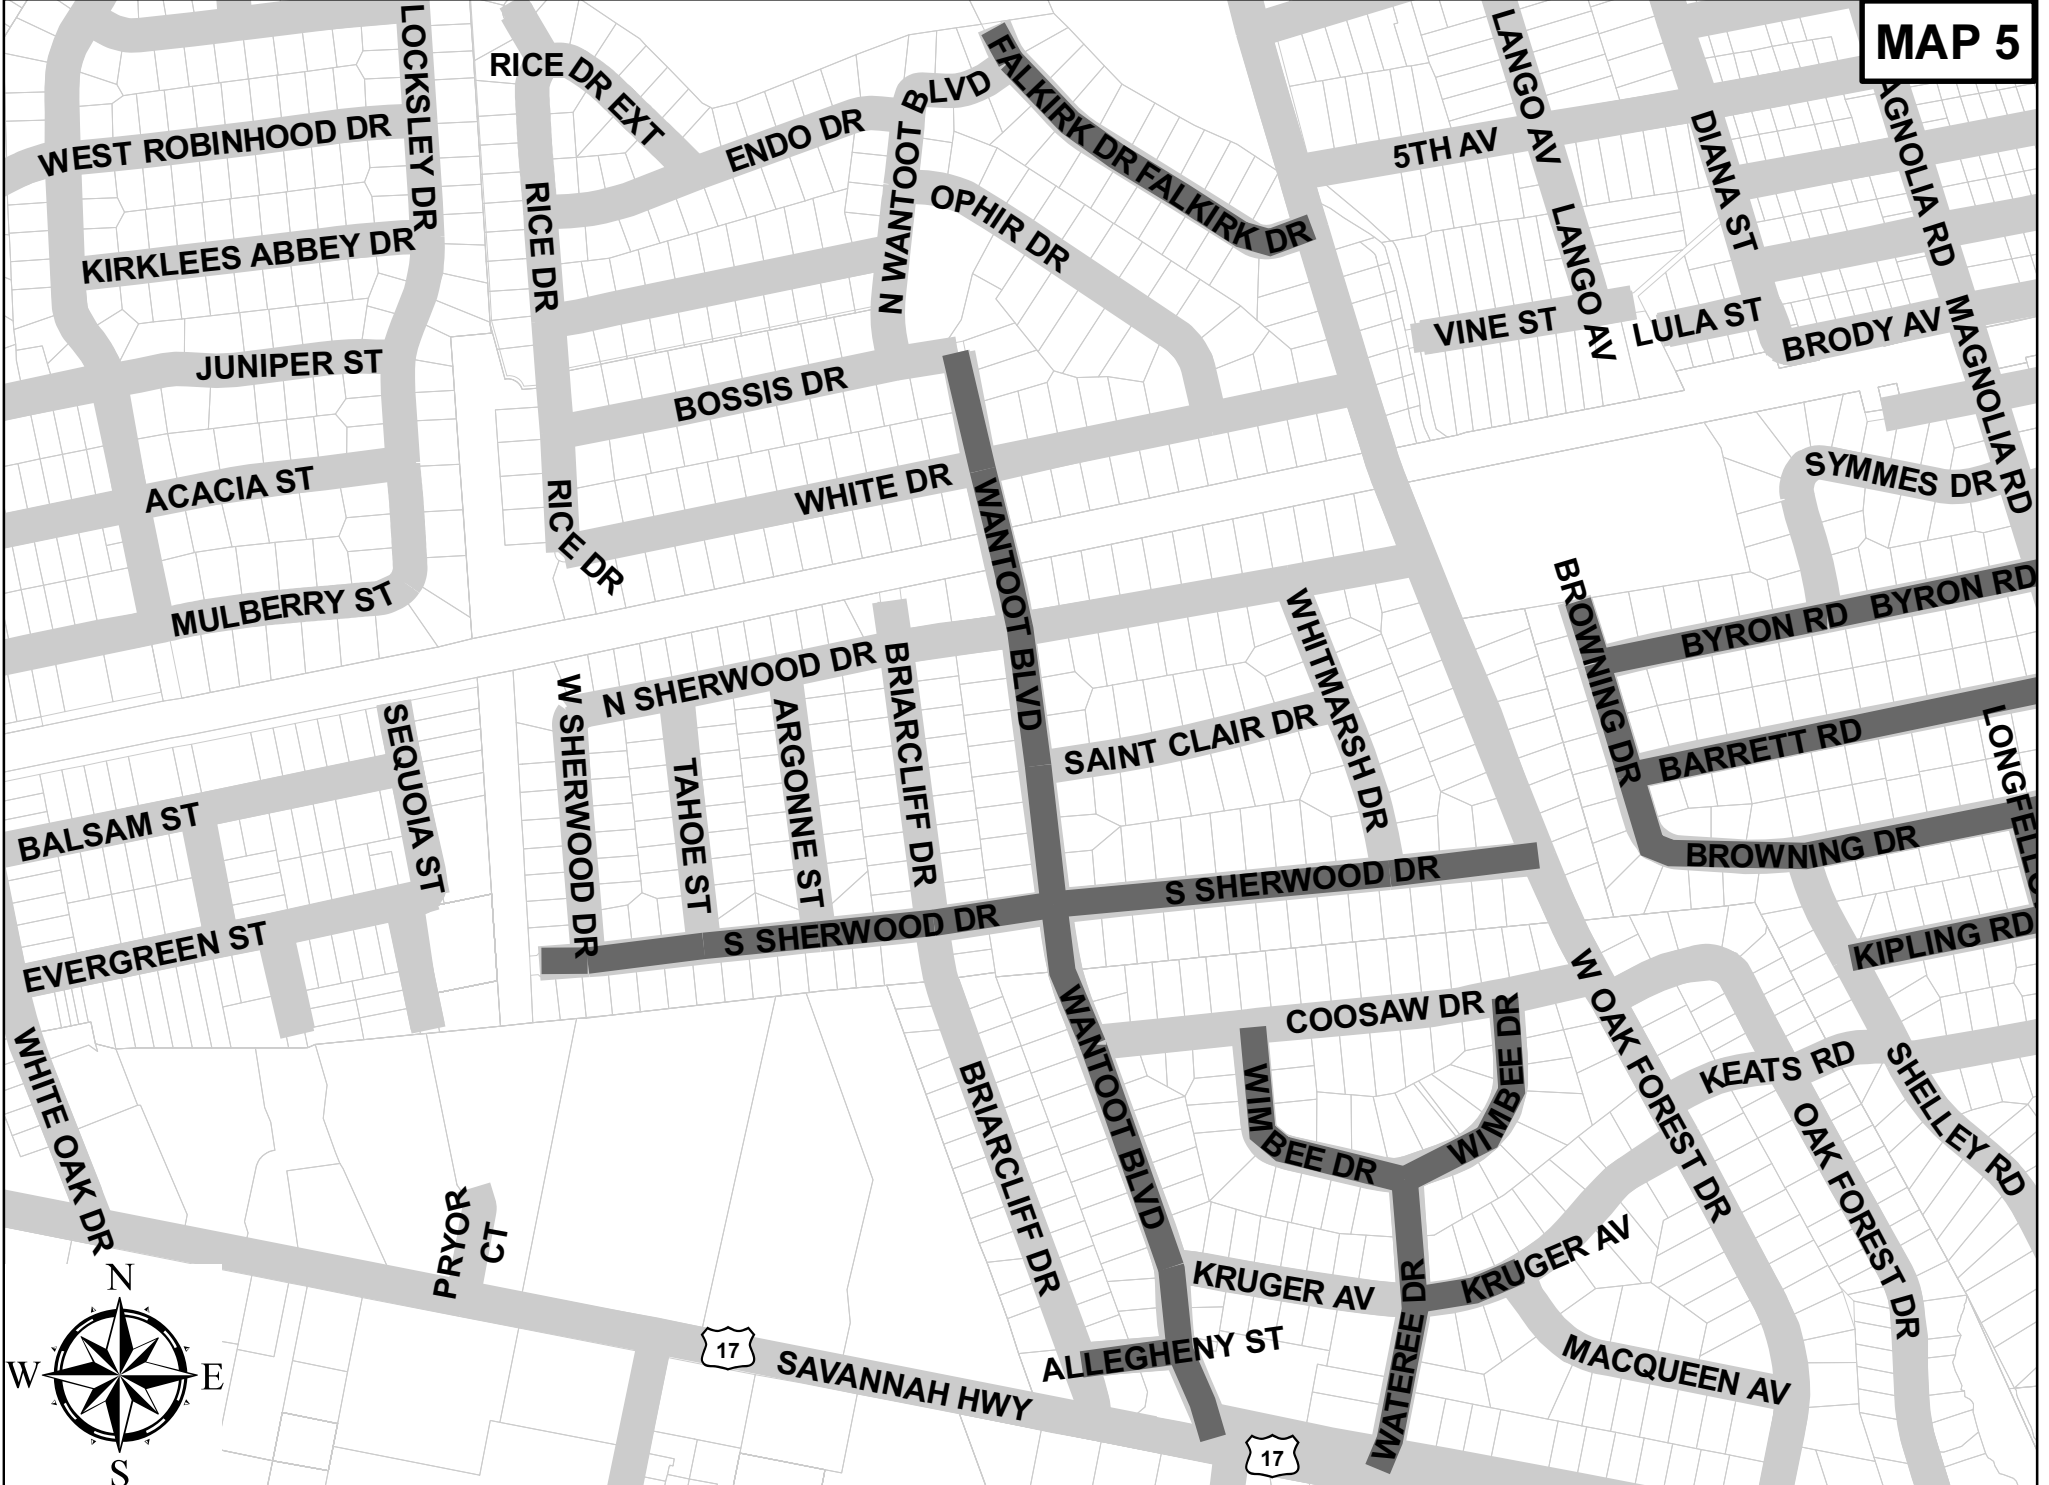

MapNumber	Route	2023000	2033000	4011004	4012040	4012040D	4013150	4013990	4030340D	4113340	6241015	6241020	6241023A	6241025	6241074	6250015	6250020	6250025	6250110	6251023	6300005	6301100	675XXXX	7204900	7205000	
		REMOVAL & DISPOSAL OF EXISTING PAVEMENT (CONCRETE DRIVE	BORROW EXCAVATION (FOR SHOULDERS) *	LIQUID ASPHALT BINDER PG 64-22	"FULL DEPTH ASPH_PAV_PATCHING 4" UNIFORM"	FULL DEPTH ASPH_PAV_PATCHING FOR DRIVES 4" UNIFORM	MILLING EXISTING ASPHALT PAVEMENT 1_5"	"VARIABLE MILLING EXISTING ASPHALT PAVEMENT FOR KEY-INS	HOT MIX ASPH_CONC_SURF_CR_TYPE C FOR DRIVES	WARM MIX ASPHALT SURFACE COURSE TYPE C	8" WHITE SOLID LINES PERM_PVMT_MARKINGS	12" WHITE SOLID LINES - PERM_PVMT_MARKINGS	48IN X 48 IN WHITE YIELD TRIANGLE - PERM_PVMT_MARKING	24" WHITE SOLID LINES (STOP/DIAG LINES)-PERM_PVMT_MARKI	4" YELLOW SOLID LINES(PVT_EDGE LINES) PERM_PVMT_MARKING	8" WHITE SOLID LINES (CROSSWALK & CHANNELIZATION) FAS	12" WHITE SOLID LINES - FAST DRY PAINT	24" WHITE SOLID LINES (STOP/DIAGONAL LINES) - FAST DR	4" YELLOW SOLID LINE (PVT_EDGE & NO PASSING) - F	48IN X 48 IN WHITE YIELD TRIANGLE FAST DRY	PERMANENT CLEAR PAVEMENT MARKERS - MONO-DIR_ - 4"X4"	PERMANENT YELLOW PAVEMENT MARKER BI- DIR_ - 4"	TRAFFIC LIGHT TIMING LOOPS- MOTORCYCLE SENSITIVE (COMPL	DETECTABLE WARNING SURFACE (Cast in place where applica	"CONCRETE DRIVEWAY (6" UNIFORM)"	
5	ALLEGHENY ST	0	13	5	135	0	0	140	24	47	0	0	0	22	460	0	0	22	460	0	0	0	0	0	0	0
5	FALKIRK DR	450	13	0	1035	10	0	90	0	190	75	0	8	24	0	75	0	24	0	8	20	14	0	0	450	
5	KRUGER AV	0	0	4	45	0	0	45	14	44	0	0	0	22	0	0	0	22	0	0	0	3	0	0	0	
5	S SHERWOOD DR	100	0	34	125	0	5800	0	122	434	0	0	12	80	0	0	0	80	0	12	30	33	0	0	100	
5	WANTOOT BLVD	200	25	39	513	25	7020	0	163	530	0	120	16	164	4366	200	120	164	4366	16	40	38	0	20	200	
5	WATEREE DR	0	0	12	150	0	200	0	61	130	45	0	0	75	0	45	0	75	0	0	0	10	1	0	0	
5	WIMBEE DR	25	0	18	185	25	1590	0	80	220	0	0	0	24	0	0	0	24	0	0	0	17	0	0	25	
	<b>Total</b>	<b>775</b>	<b>51</b>	<b>112</b>	<b>2188</b>	<b>60</b>	<b>14610</b>	<b>275</b>	<b>464</b>	<b>1595</b>	<b>120</b>	<b>120</b>	<b>36</b>	<b>411</b>	<b>4826</b>	<b>320</b>	<b>120</b>	<b>411</b>	<b>4826</b>	<b>36</b>	<b>90</b>	<b>119</b>	<b>1</b>	<b>20</b>	<b>775</b>	




MapNumber	Route	2023000 REMOVAL & DISPOSAL OF EXISTING PAVEMENT (CONCRETE DRIVE	2033000 BORROW EXCAVATION (FOR SHOULDERS) *	4011004 LIQUID ASPHALT BINDER PG 64-22	4012040 "FULL DEPTH ASPH_PAV_ PATCHING 4"" UNIFORM"	4012040D FULL DEPTH ASPH_PAV_ PATCHING FOR DRIVES 4" UNIFORM	4013155 VARIABLE EDGE MILLING 1_5"	4013990 "VARIABLE MILLING EXISTING ASPHALT PAVEMENT FOR KEY-INS	4030340D HOT MIX ASPH_CONC_ SURF_ CR_ TYPE C FOR DRIVES	4113340 WARM MIX ASPHALT SURFACE COURSE TYPE C	6241015 8" WHITE SOLID LINES PERM_PVMT_MARKINGS	6241023 12IN X 18IN WHITE TRIANG_ YIELD BAR (GAPS EXC)PERM_PVMT	6241023A 48IN X 48 IN WHITE YIELD TRIANGLE -- PERM_PVMT_MARKING	6241025 24" WHITE SOLID LINES (STOP/DIAG LINES)-PERM_PVMT_MARKI	6250015 "8"" WHITE SOLID LINES (CROSSWALK & CHANNELIZATION) FAS	6250025 "24"" WHITE SOLID LINES (STOP/DIAGONAL LINES) - FAST DR	6251023 48IN X 48 IN WHITE YIELD TRIANGLE FAST DRY	6251023A 12IN X 18IN WHITE TRIANG_ YIELD BAR (GAPS EXC) FAST DR	6300005 "PERMANENT CLEAR PAVEMENT MARKERS - MONO-DIR_ - 4""X4""	6301100 "PERMANENT YELLOW PAVEMENT MARKER BI- DIR_ - 4""	7205000 "CONCRETE DRIVEWAY (6"" UNIFORM)"
6	ANITA DR	250	13	32	582	210	0	200	60	470	140	0	20	44	140	44	20	0	50	38	250
6	BARRETT RD	0	0	14	142	25	0	0	41	190	0	0	8	20	0	20	8	0	20	0	0
6	BROWNING DR	150	0	22	132	0	0	80	36	317	0	0	16	24	0	24	16	0	0	0	150
6	BYRON RD	125	0	14	100	25	0	40	33	188	0	0	8	33	0	33	8	0	20	0	125
6	EMILY DR	0	0	6	120	5	112	30	18	70	77	0	0	24	77	24	0	0	0	5	0
6	JERRY DR	25	26	9	90	65	0	0	12	92	0	0	0	24	0	24	0	0	0	7	25
6	KIPLING RD	125	0	6	85	0	0	22	10	85	0	11	4	30	0	30	4	11	10	0	125
6	LONGFELLOW RD	200	0	17	120	0	0	40	62	219	0	0	8	33	0	33	8	0	20	0	200
6	PAULA DR	25	26	13	170	20	0	108	41	175	70	0	8	22	70	22	8	0	20	14	25
	<b>Total</b>	<b>900</b>	<b>65</b>	<b>133</b>	<b>1541</b>	<b>350</b>	<b>112</b>	<b>520</b>	<b>313</b>	<b>1806</b>	<b>287</b>	<b>11</b>	<b>72</b>	<b>254</b>	<b>287</b>	<b>254</b>	<b>72</b>	<b>11</b>	<b>140</b>	<b>64</b>	<b>900</b>



Map Number	Route	2023000	4011004	4012040	4012040D	4013150	4013990	4030340D	4030360B	4113340	6241015	6241020	6241025	6241064	6250015	6250020	6250025	6250110	6251023	6251023A	6300005	6301100	675XXXX	7197130	7204900	7205000	7209000		
		REMOVAL & DISPOSAL OF EXISTING PAVEMENT (CONCRETE DRIVE	LIQUID ASPHALT BINDER PG 64-22	"FULL DEPTH ASPH_PAV_PATCHING 4"" UNIFORM"	FULL DEPTH ASPH_PAV_PATCHING FOR DRIVES 4" UNIFORM	MILLING EXISTING ASPHALT PAVEMENT 1.5"	"VARIABLE MILLING EXISTING ASPHALT PAVEMENT FOR KEY-INS	HOT MIX ASPH_CONC_SURF_CR_TYPE C FOR DRIVES	HOT MIX ASPH_CONC_SURF_CR_TYPE E (BACKSLOPES	WARM MIX ASPHALT SURFACE COURSE TYPE C	8" WHITE SOLID LINES PERM_PVMT_MARKINGS	12" WHITE SOLID LINES - PERM_PVMT_MARKINGS	24" WHITE SOLID LINES (STOP/DIAG LINES)-PERM_PVMT_MARKI	4" YELLOW BROKEN LINES(GAPS EXC)PERM_PVMT_MARKING	8"" WHITE SOLID LINES (CROSSWALK & CHANNELIZATION) FAS	12" WHITE SOLID LINES - FAST DRY PAINT	24"" WHITE SOLID LINES (STOP/DIAGONAL LINES) - FAST DR	4"" YELLOW SOLID LINE (PVT_EDGE & NO PASSING) - F	48IN X 48 IN WHITE YIELD TRIANGLE FAST DRY	12IN X 18IN WHITE TRIANG_YIELD BAR (GAPS EXC) FAST DR	"PERMANENT CLEAR PAVEMENT MARKERS - MONO-DIR_-4""x4""	"PERMANENT YELLOW PAVEMENT MARKER BI- DIR_- 4""	TRAFFIC LIGHT TIMING LOOPS-MOTORCYCLE SENSITIVE (COMPL	ADJUST DROP INLET	DETECTABLE WARNING SURFACE (Cast in place where applica	"CONCRETE DRIVEWAY (6"" UNIFORM)"	PEDESTRIAN RAMP CONSTRUCTION		
7	BATTERY AV	0	11	40	100	0	53	11	0	157	0	120	24	0	0	120	24	0	0	0	0	12	0	1	0	0	0	0	0
7	BROOKFIELD ST	0	9	24	121	0	0	0	0	116	0	0	36	0	0	0	36	0	0	0	0	10	0	2	0	0	0	0	0
7	CHANNING ST	0	5	112	100	0	0	26	0	53	0	0	24	0	0	0	24	0	0	0	0	4	0	0	0	0	0	0	0
7	CHICKADEE AV	20	3	0	25	0	0	0	0	38	0	0	12	0	0	0	12	0	0	0	0	4	0	0	0	0	0	0	0
7	FIALL ST	0	11.4	150	0	0	24	11	34	96	0	0	12	0	0	0	12	0	0	0	0	8	0	0	0	0	0	0	0
7	HIGH ST	0	3	0	25	0	0	130	0	41	0	120	12	0	0	120	12	0	0	0	0	7	0	0	0	0	0	0	0
7	MAMIE ST	25	5	45	225	0	24	4	0	74	0	0	12	0	0	0	12	0	0	0	0	7	0	0	0	0	25	0	0
7	SYCAMORE AV	0	20	0	0	240	170	66	56	332	160	0	40	2420	160	0	40	2420	4	4	24	24	1	0	10	0	10	0	10
	<b>Total</b>	<b>45</b>	<b>67.4</b>	<b>371</b>	<b>596</b>	<b>240</b>	<b>271</b>	<b>248</b>	<b>90</b>	<b>907</b>	<b>160</b>	<b>240</b>	<b>172</b>	<b>2420</b>	<b>160</b>	<b>240</b>	<b>172</b>	<b>2420</b>	<b>4</b>	<b>4</b>	<b>24</b>	<b>76</b>	<b>1</b>	<b>3</b>	<b>10</b>	<b>25</b>	<b>10</b>	<b>0</b>	<b>10</b>

\* Contractor shall coordinate resurfacing of Battery Av and Sycamore Av with Project Manager due to other construction project on these streets.

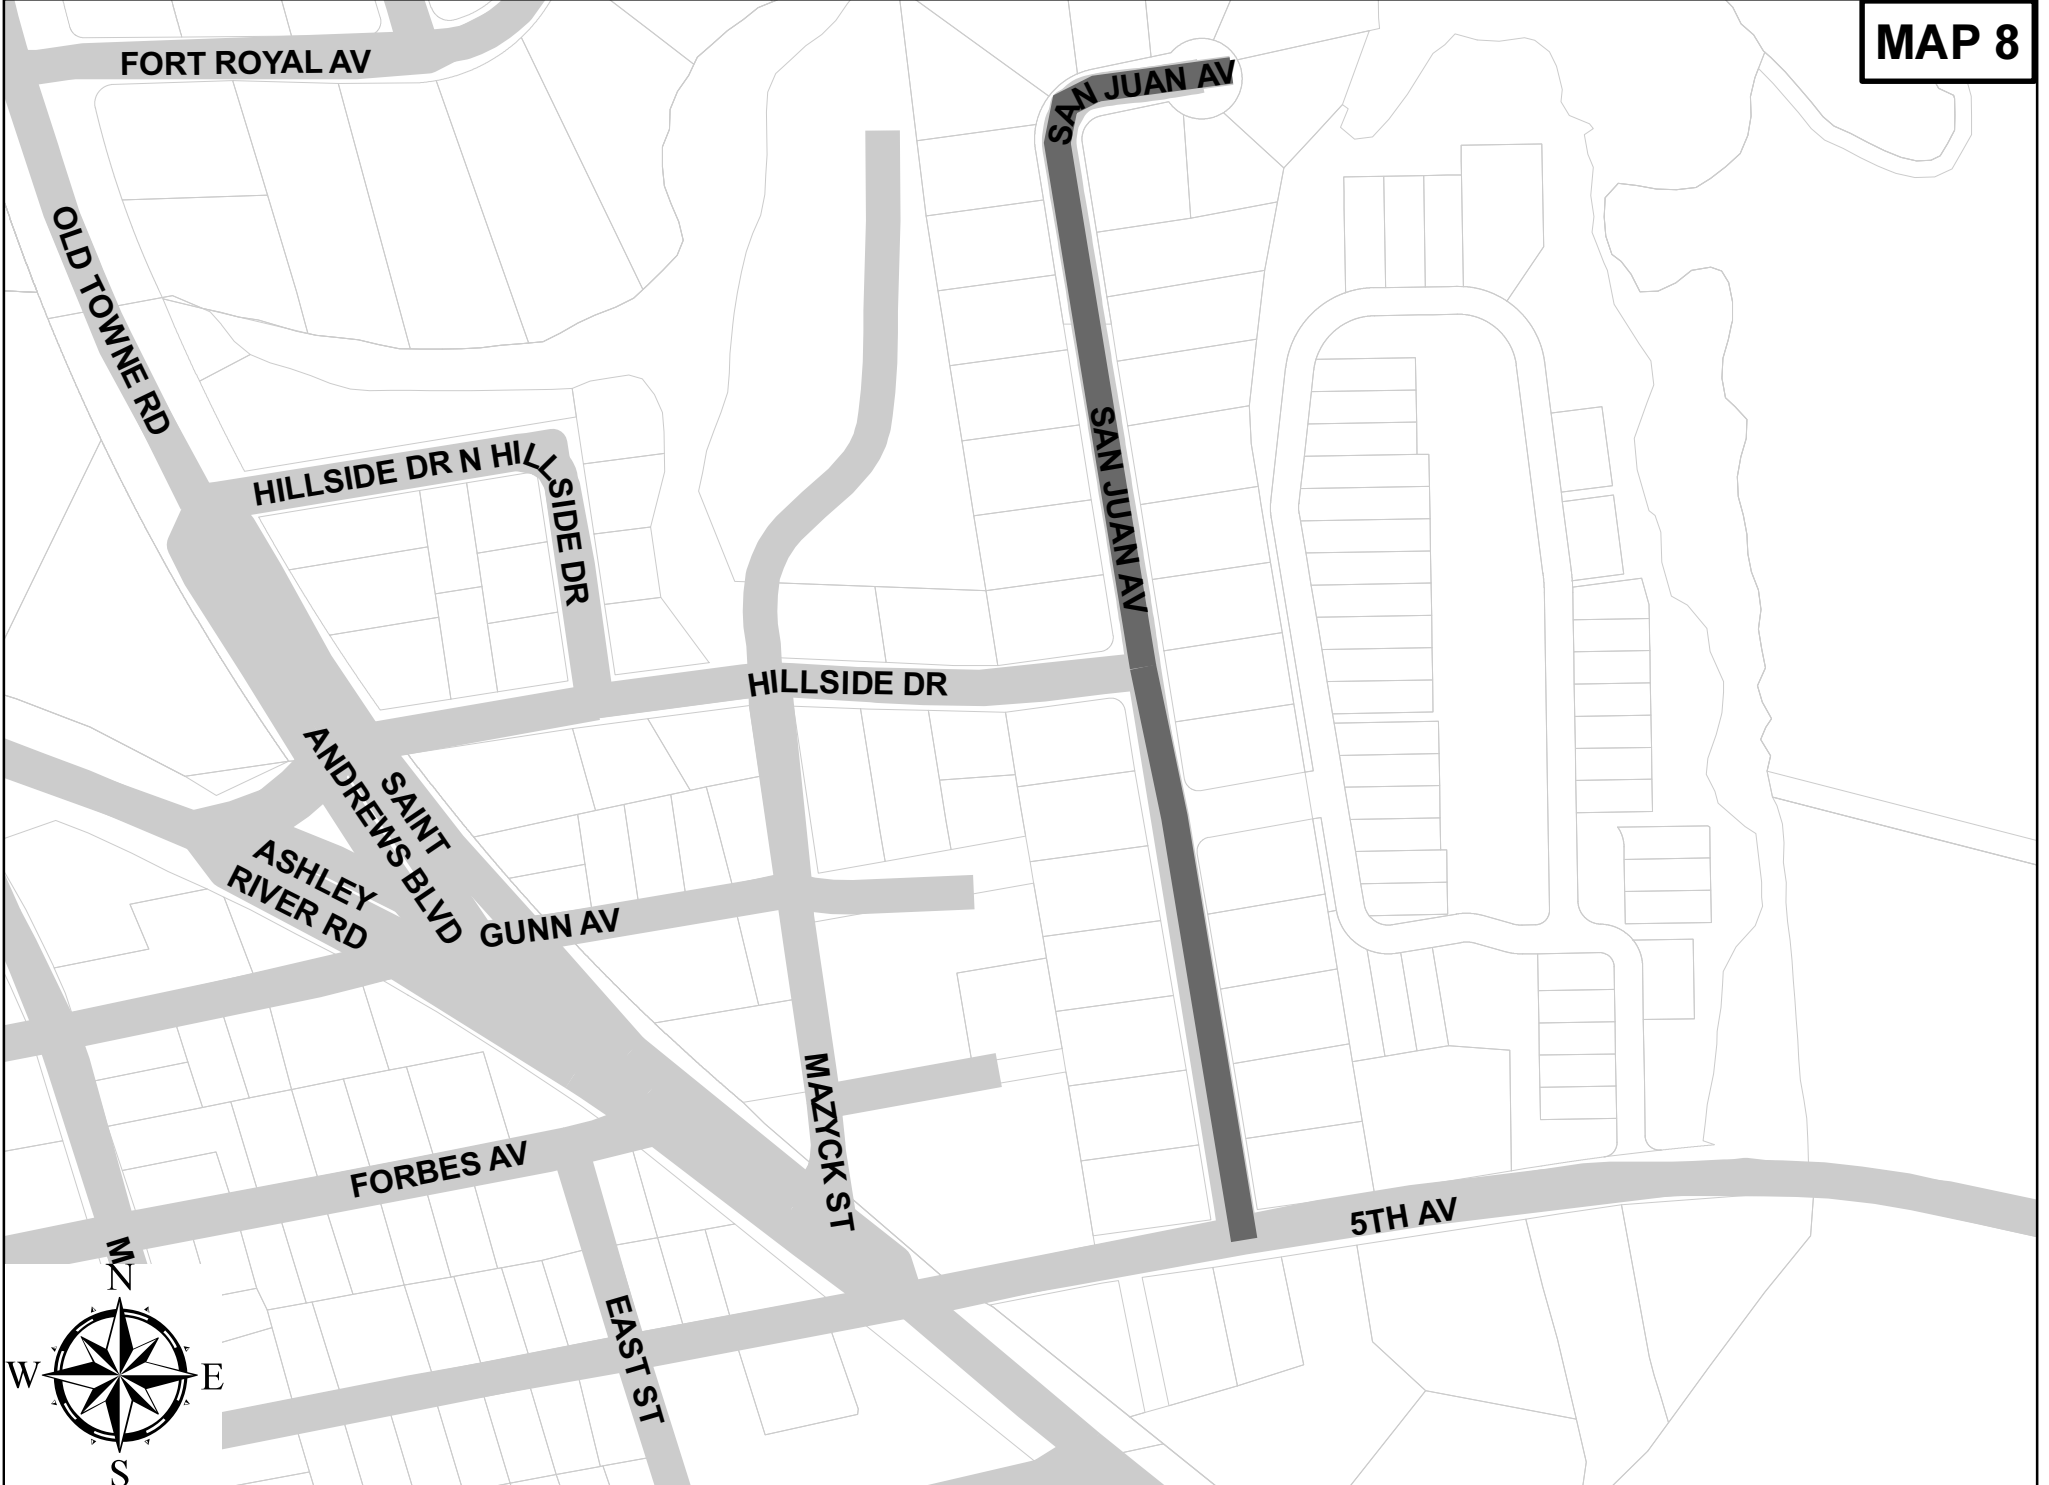



MapNumber	Route	4011004 LIQUID ASPHALT BINDER PG 64-22	4012040 "FULL DEPTH ASPH_PAV_PAVING 4"" UNIFORM"	4012040D FULL DEPTH ASPH_PAV_PAVING FOR DRIVES 4" UNIFORM	4030340D HOT MIX ASPH_CONC_SURF_CR_TYPE C FOR DRIVES	4113340 WARM MIX ASPHALT SURFACE COURSE TYPE C	6241025 24" WHITE SOLID LINES (STOP/DIAG LINES)-PERM_PVMT_MARKI	6250025 "24"" WHITE SOLID LINES (STOP/DIAGONAL LINES) - FAST DR	6301100 "PERMANENT YELLOW PAVEMENT MARKER BI- DIR_ - 4""
8	SAN JUAN AV	15	16	50	146	249	36	36	18
	<b>Total</b>	<b>15</b>	<b>16</b>	<b>50</b>	<b>146</b>	<b>249</b>	<b>36</b>	<b>36</b>	<b>18</b>